

Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Bona Craft Oil 2K



Bona AB

Bona[®]

Programme	The International EPD System, www.environdec.com
Programme operator	EPD International AB
Type of EPD	EPD of a single product from a manufacturer/service provider
EPD registration number	EPD-IES-0026289
Version date	2026-04-30
Validity date	2031-04-29

An EPD may be updated or unpublished if conditions change. To find the latest version of the EPD and to confirm its validity, see <https://www.environdec.com>

General Information

Programme information

Programme	The International EPD System
Address	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website	www.environdec.com
E-mail	support@environdec.com

PCR and verification

Product Category Rules (PCR)	CEN standard EN 15804 serves as the Core Product Category Rules (PCR) Construction Products v2.01 (EN 15804: A2) PCR review was conducted by the Technical Committee of the International EPD System. See https://environdec.com/about-us/the-international-epd-system-about-the-system for a list of members. Review chair: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via the Secretariat www.environdec.com/contact.
Third-party verification:	External and independent "third-party") verification of the declaration and data, according to ISO14025:2006, via EPD verification through: ☒ Individual EPD verification without a pre-verified LCA/EPD tool Third-party verifier: Stephen Forson, Viridis Pride Ltd. Approved by: The International EPD System

Procedure for follow-up of data during EPD validity involves third party verifier: ☐ Yes ☒ No

Ownership and limitations on use of EPD

The EPD owner has the sole ownership, liability and responsibility for the EPD. EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

Information about EPD owner

EPD owner	Bona AB
Contact	Bjorn Johansson
Contact details	bjorn.johansson@bona.com
Address	Murmansgatan 130, Malmö, Sweden
Description of the organisation	Bona AB is a company that produces and sells products for floor coating, maintenance, and refurbishment of floors. Bona wishes to understand the environmental impacts of its floor coating chemicals used to refurbish old flooring and make this information publicly available as an EPD.
Product-related or management system-related certifications:	ISO 9001 ISO 14001
Life Cycle Assessment (LCA)	Srikanth Panda, Carbonzero AB

Product information

Product name(s)	Bona Craft Oil 2K
Product description:	2K natural oil with short drying time and excellent wear-resistance. Waterborne 2-component lacquer for surface treatment of wood floors in commercial areas with light to moderate traffic intensity. Shelf life: 1 year from date of production in unopened original container (Hardener 18 months from date of production in unopened original container)
UN CPC code	35110 - Paints and varnishes and related products
Name and location of production site(s):	Name of plant: Limburg, Germany Location: Limburg an der Lahn, Germany
Technical or actual lifespan	Technical life span can be assumed to be equal to the construction works it is part of, i.e., typically at least 50 years

Product image



Manufacturing process

The manufacturing process varies by application type but generally involves mixing resins (such as alkyd, epoxy, or acrylic) with water and additives, followed by heating and high-speed agitation. The resulting mixture is then filtered to remove impurities and undergoes quality control checks for properties such as viscosity, colour, and drying time. Finally, the coatings are packaged in different sizes and prepared for distribution.

Technical and functional characteristics of the product:

Bona Craft Oil 2K is made from modified vegetable oils, and catalysed with a hardener for quicker drying and greater durability. It can be used on its own as a fast-drying, high-performance oil, or combined with a lacquer from the Traffic HD family, to add gloss and minimise future maintenance. The 2K oil works perfectly with a wide variety of wood species, including cherry, walnut, smoked oak and steamed beech.

Base: Modified vegetable oils incl. isocyanate hardener

Category: Hardening oil, 2-comp

Solids content: 96-98%

Drying time (until use): 12 h

Application tools: Rubber applicator, short-haired roller or stainless-steel trowel

Coverage: approx. 30 m²/litre

More information on product can be found on www.bona.com

Product Table

Mass in kg

Product Name	Weight	Unit
Bona Craft Oil 2K	1.00	kg

Content declaration

Product Components	Mass, kg	Post-consumer material, mass-% of products	Biogenic material, mass-% of product	Biogenic material, kg C / declared unit
Chemicals	5,88E-01	0,00%	0,00%	0,00E+00
Water	1,17E-01	0,00%	0,00%	0,00E+00
Pigments	2,85E-01	0,00%	0,00%	0,00E+00
Petroleum Products	9,05E-03	0,00%	0,00%	0,00E+00
Total	1,00E+00	0,00%	0,00%	0,00E+00

Packaging Materials	Mass, kg	Mass-% (versus the product)	Biogenic material, mass-% of product	Biogenic material kg C/declared unit
Paper	1,20E-02	1,20%	0,48%	4,80E-03
Plastic	3,29E-04	0,03%	0,00%	0,00E+00
Metal	2,40E-02	2,40%	0,00%	0,00E+00
Total	3,63E-02	3,63%	0,48%	4,80E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 kg of CO₂

* Due to rounding, the total mass of product/packaging materials may not exactly match the sum of individual material inputs.

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
No hazardous materials			

At the date of issue of this declaration, there is no "Substance of Very High Concern" (SVHC) in concentration above 0.1% by weight, and neither does the packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals)

LCA information


Field	Value
Functional Unit / Declared Unit	1 kg
Conversion Factor to Mass	1
Time Representativeness	Data obtained refers to the year 2025
Geographical Scope	The study focuses on the production of the product in Germany and the distribution and installation globally.
System Boundary	The system boundaries are set to be "cradle to gate" with options with the modules A1-A3, A4, A5
Excluded Modules	B1, B2, B3, B4, B5, B6, B7, C1, C2, C3, C4, D
Database(s) and LCA Software Used	Ecoinvent 3.11 and EandoX version 1.01
Reference Service Life (RSL)	N/A
Characterisation Factors Used	The characterization factors used in this study refer to PCR 2019:14 and EN 15804+A2 (based on EF 3.1).
Allocation Procedures Used	The plant produces a range of chemicals. Actual manufacturing data for A3 was recorded for 2024. The allocation utilised a combination of economic (where feasible) and mass allocation methods, as determined by the accounting and production teams.
Cut-off criteria	All input and output flows in a unit process were considered, i.e., the value of all flows in the unit process and the corresponding LCI were considered, where data were available.


Energy Breakdown

Electricity used in the manufacturing

Energy Source	Data Source	Year	GWP excl. biogenic [kg CO2-eq/kWh]
Electricity from Wind Power	Ecoinvent 3.11	2024	1,89E-02

Breakdown of electricity usage

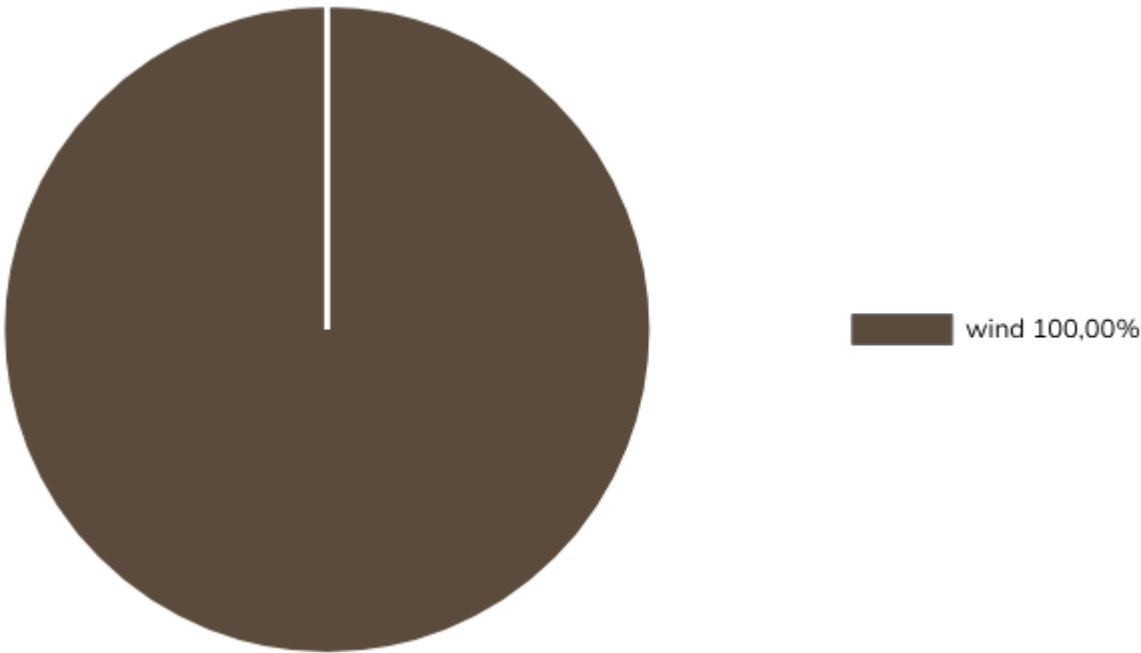

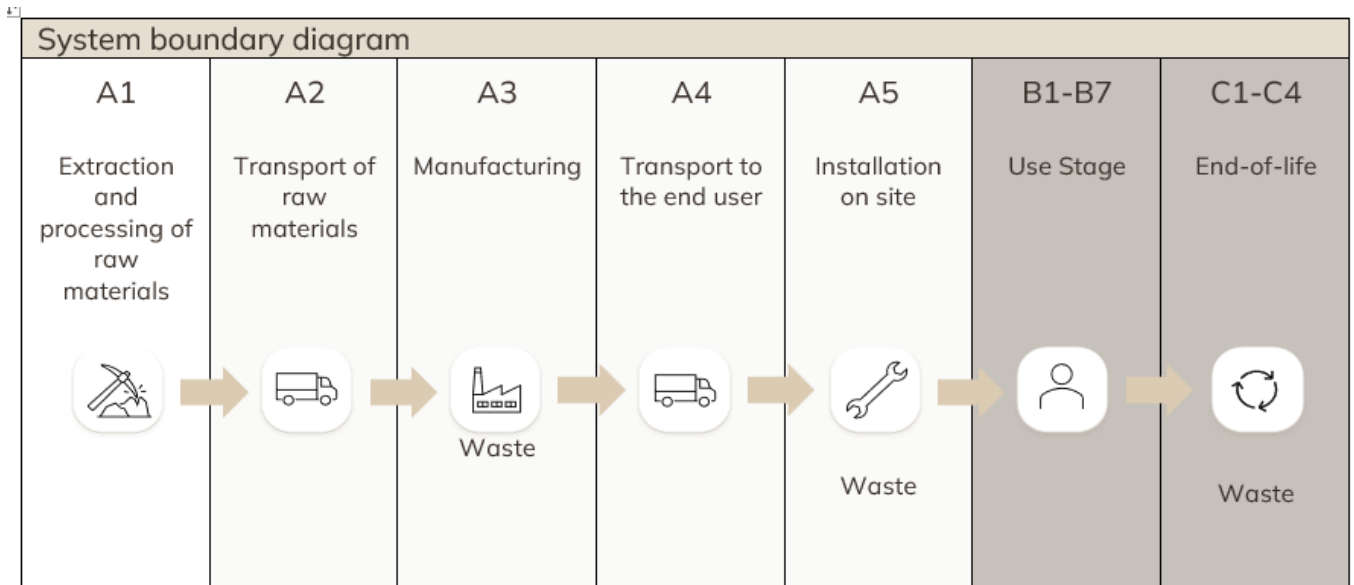

Module D: Benefits and loads beyond the system boundary

 Excluded

A1	Raw material supply	This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream to the studied manufacturing process, including packaging material.
A2	Transport to the manufacturer	The raw materials are transported to the manufacturing site.
A3	Manufacturing	This module includes all resources used to produce and waste produced. This also includes additives and packaging material.
A4	Transport	Transportation from the manufacturing site to distribution centre and then from the distribution centre to the building site is included. truck: 549km train: 76km boat: 880km
A5	Construction installation	This module covers all on-site activities required to install the product into the building structure as well as the management, transport, and treatment of any installation waste or packaging residues at the construction site

System boundaries

	Product stage			Assembly stage		Use stage							End of life stage				Benefits & loads beyond system boundary
	Raw Materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery - Recycling-potential
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Declared	X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Geography	GLO	GLO	DE	GLO	GLO	-	-	-	-	-	-	-	-	-	-	-	-
Specific data used	9,47 %			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation-Products	0 %			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation-Sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

ND – Not Declared; X – Declared Reading example: 9,0E-03 = $9,0 \cdot 10^{-3}$ = 0,009

Declaration of data sources, reference years, and share of primary data

Process	Source type	Source	Reference year	Data category	GHG share (%)	Share of primary data, of GWP-GHG results for A1-A3
Manufacturing of product	Collected data	Ecoinvent 3.11, CarbonZero	2025	100% primary data	0,84	0,84
Transportation of raw materials to manufacturing site	Collected data	Ecoinvent 3.11	2025	100% Primary data	3,38	3,38
Production raw materials and components	Collected data	Ecoinvent 3.11, EPD-IES-0017264	2024	6% primary data 94% generic data	93,59	5,22
Production of Packaging	Collected data	Ecoinvent 3.11	2024	2% primary data 98% generic data	2,19	0,02
Total share of primary data			2024		100	9,47

The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

Summary of data quality:

The EPD is based on data collected by the BONA AB over a one-year period from January 2025. The EPD is based on an average product composition, and it is manufactured at a single site. The end-of-life stage is representative of the European Union. The quality of the relevant data used for the EPD in terms of its time, geography and technology representativeness using EN 15804:2012+A2:2019, Annex E. Time representativeness is considered to be very good, Technical representativeness is deemed to be fair and Geographical representativeness is considered to be good. The relevant data assessed included no other poor or very poor data.

Transport to the building site (A4)

Vehicle type	Distance (km)	Capacity utilization* (%)	Bulk density of transported products (kg/m3)	Volume capacity utilisation factor**
Truck-Trailer 40 tonne	549	61	as product density	1,00
Train	76	40	as product density	1,00
Container Ship (Bulk)	880	53	as product density	1,00

*Including empty returns

**Factor =1 or <1 or >1 for compressed or nested packaged products

Installation of the product in the building (A5)

Scenario Information	Unit (expressed per functional unit or per declared unit)
Ancilliary materials for installation (specified by material)	None
Water use	None
Other resource use	None
Quantitative description of energy type (regional mix) and consumption during the installation process	Not applicable
Direct emissions at ambient air, soil and water	None

A5 Waste materials on the building site before waste processing, generated by the product's installation (specified by type)

Name	Type	Weight	Unit (expressed per functional unit or per declared unit)
Metal	packaging	2,43E-02	kg
Plastic	packaging	3,29E-04	kg
Paper	packaging	1,20E-02	kg

A5 Output materials

Name	Type	Route	Weight	Unit (expressed per functional unit or per declared unit)
Metal	product	recycling waste	2,19E-02	kg
Plastic	product	recycling waste	1,81E-04	kg
Metal	product	landfill waste	2,43E-03	kg
Plastic	product	incineration waste	1,48E-04	kg
Paper	product	incineration waste	1,22E-02	kg

End-of-life (C1-C4)

The end of life stage (module C) have been excluded since the 4 criteria set in the PCR are fulfilled:

- The product is physically integrated with other products during installation and cannot be separated from them at end of life
- The product is no longer identifiable at end of life as a result of a physical or chemical transformation
- The product does not contain biogenic carbon
- The EPD is not intended to be used for business to consumer communication

Environmental performance

Potential environmental impact – indicators according to EN15804 + A2

Results per declared unit: 1 kg				
Indicator	Unit	A1-A3	A4	A5
GWP-total	kg CO2 eq	3,55E+00	1,16E-01	2,05E-02
GWP-fossil	kg CO2 eq	3,54E+00	1,16E-01	2,36E-03
GWP-biogenic	kg CO2 eq	-7,45E-04	1,30E-04	1,82E-02
GWP-luluc	kg CO2 eq	1,75E-02	4,94E-05	8,31E-07
ODP	kg CFC11 eq	7,35E-08	2,43E-09	2,89E-11
AP	mol H+ eq	6,34E-02	5,57E-04	9,41E-06
EP-freshwater	kg P eq	1,08E-03	1,04E-05	3,74E-07
EP-marine	kg N eq	3,87E-03	1,68E-04	5,37E-06
EP-terrestrial	mol N eq	3,19E-02	1,83E-03	3,73E-05
POCP	kg NMVOC eq	1,56E-02	6,76E-04	1,14E-05
ADP-minerals & metals*	kg Sb-Eq	2,74E-05	3,87E-07	1,32E-08
ADP-fossil*	MJ	5,68E+01	1,66E+00	2,06E-02
WDP*	m³	3,57E+00	1,01E-02	7,60E-04
Acronyms	GWP-fossil: Global Warming Potential fossil fuels; GWP-biogenic: Global Warming Potential biogenic; GWP-luluc: Global Warming Potential land use and land use change; ODP: Depletion potential of the stratospheric ozone layer; AP: Acidification potential, Accumulated Exceedance; EP-freshwater: Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine: Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial: Eutrophication potential, Accumulated Exceedance; POCP: Formation potential of tropospheric ozone; ADP-minerals&metals: Abiotic depletion potential for non-fossil resources; ADP-fossil: Abiotic depletion for fossil resources potential; WDP: Water (user) deprivation potential, deprivation-weighted water consumption			

**The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.*

Disclaimer: The results presented for modules A1-A3 alone shall not be used for comparisons unless all relevant life cycle stages, particularly end-of-life (C1-C4), are included. This ensures a more accurate and representative assessment of the environmental impact over the full product life cycle.

Use of resources

Option A has been selected in calculating the primary energy indicators. Under this option, the energy is recorded as an input in the module where it enters the product system (A1–A3) and as an equivalent output in the module where it exits the system (A5 for packaging content and C3 and/or C4 for product content), whether it is transferred to another product system or treated as waste.

Results per declared unit: 1 kg				
Indicator	Unit	A1-A3	A4	A5
PERE	MJ	5,05E+00	3,90E-02	1,68E-01
PERM	MJ	1,39E-01	0,00E+00	-1,39E-01
PERT	MJ	5,19E+00	3,90E-02	2,91E-02
PENRE	MJ	5,72E+01	1,76E+00	3,89E-02
PENRM	MJ	5,41E-01	0,00E+00	-1,45E-02
PENRT	MJ	5,77E+01	1,76E+00	2,44E-02
SM	kg	4,84E-03	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00
FW	m ³	7,89E-02	5,35E-05	4,90E-06
Acronyms	PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM: Use of renewable primary energy resources used as raw materials; PERT: Total use of renewable primary energy resources; PENRE: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM: Use of non-renewable primary energy resources used as raw materials; PENRT: Total use of non-renewable primary energy re-sources; SM: Use of secondary material; RSF: Use of renewable secondary fuels; NRSF: Use of non-renewable secondary fuels; FW: Use of net fresh water			

Additional mandatory and voluntary impact category indicators

Results per declared unit: 1 kg				
Indicator	Unit	A1-A3	A4	A5
GWP-GHG	kg CO ₂ eq	3,57E+00	1,16E-01	2,58E-03
PM	Disease incidence	2,55E-07	8,80E-09	1,29E-10
IRP	kBq U235 eq.	3,32E-01	3,41E-03	8,11E-05
ETP-fw	CTUe	8,33E+01	2,26E-01	1,39E-02
HTP-c	CTUh	8,89E-09	2,12E-11	1,55E-12
HTP-nc	CTUh	3,57E-07	9,98E-10	5,25E-11
SQP	Dimensionless	1,95E+01	9,42E-01	2,97E-02
Acronyms	GWP-GHG: global warming potential - greenhouse gases; PM: particulate matter; IRP: ionizing radiation potential; ETP-fw: ecotoxicity potential - freshwater; HTP-c: human toxicity potential - cancer; HTP-nc: human toxicity potential - non-cancer; SQP: smog formation potential			

The GWP-GHG indicator is identical to GWP-total except that the characterisation factor (CF) for biogenic CO₂ is set to zero. This means that the uptake and emissions of biogenic CO₂ are "balanced out" already in modules A1 and A3, instead of in modules A5 (for packaging) or modules C3 and/or C4 (for the product). The results over the entire product life cycle, from module A to C, are thus identical for GWP-GHG and GWP-total unless some of the uptake of biogenic CO₂ is released as another greenhouse gas (e.g., CH₄). In the context of Norwegian public procurement legislation, GWP-GHG is also referred to as GWP-IOBC.

Waste indicators

Results per declared unit: 1 kg				
Indicator	Unit	A1-A3	A4	A5
HWD	kg	3,56E-01	2,85E-01	2,97E-03
NHWD	kg	1,21E+00	9,21E-01	2,54E-03
RWD	kg	1,20E-05	4,44E-07	2,36E-09
Acronyms	HW: Hazardous waste disposed; NHW: Non-hazardous waste disposed; RW: Radioactive waste disposed			

Output flow indicators

Results per declared unit: 1 kg				
Indicator	Unit	A1-A3	A4	A5
CRU	kg	0,00E+00	0,00E+00	0,00E+00
MFR	kg	1,95E-02	0,00E+00	2,21E-02
MER	kg	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	2,20E-02
EET	MJ	0,00E+00	0,00E+00	4,42E-02
Acronyms	CRU: Components for reuse; MFR: Materials for recycling; MER: Materials for energy recovery; EEE: Exported electric energy; EET: Exported thermal energy			

Information on biogenic carbon content

Parameter	Unit	Value
Biogenic carbon content in product	kg C	0
Biogenic carbon content in the accompanying packaging	kg C	4,80E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 kg of CO₂

Disclaimers

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
ILCD Type 1	Depletion potential of the stratospheric ozone layer (ODP)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
ILCD Type 2	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
ILCD Type 2	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
ILCD Type 2	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
ILCD Type 2	Formation potential of tropospheric ozone (POCP)	None
ILCD Type 3	Abiotic depletion potential for non-fossil resources (ADP-minerals & metals)	1
ILCD Type 3	Abiotic depletion potential for fossil resources (ADP-fossil)	1
ILCD Type 3	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	1
Disclaimer 1 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.		
Note 1: The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins, and/or risks.		
Note 2: The results presented for modules A1-A3 alone shall not be used for comparisons unless all relevant life cycle stages, particularly end-of-life (C1-C4), are included. This ensures a more accurate and representative environmental impact assessment over the full product life cycle.		

Abbreviations

General Abbreviations

EN	European Norm (Standard)	EPD	Environmental Product Declaration
EF	Environmental Footprint	GPI	General Programme Instructions
ISO	International Organization for Standardization	LCA	Life Cycle Assessment
PCR	Product Category Rules	c-PCR	Complementary Product Category Rules
CEN	European Committee for Standardization	CLC	Co-location centre
CPC	Central Product Classification	GHS	Globally harmonized system of classification and labelling of chemicals
GRI	Global Reporting Initiative		

Environmental Impact Indicators (EN 15804)

GHG	Greenhouse gas	GWP	Global Warming Potential (kg CO ₂ eq.)
GWP-fossil	Global Warming Potential from fossil sources (kg CO ₂ eq.)	GWP-biogenic	Global Warming Potential from biogenic sources (kg CO ₂ eq.)
GWP-luluc	Global Warming Potential from land use and land use change (kg CO ₂ eq.)	GWP-total	Total Global Warming Potential (kg CO ₂ eq.)
GWP-GHG	Global Warming Potential for greenhouse gases (kg CO ₂ eq.)	ODP	Ozone Depletion Potential (kg CFC-11 eq.)
AP	Acidification Potential (mol H ⁺ eq.)	EP	Eutrophication Potential
EP-freshwater	Freshwater eutrophication potential (kg P eq.)	EP-marine	Marine eutrophication potential (kg N eq.)
EP-terrestrial	Terrestrial eutrophication potential (mol N eq.)	POCP	Photochemical Ozone Creation Potential (kg NMVOC eq.)
ADP	Abiotic Depletion Potential	ADP-minerals&metals	Abiotic depletion potential for non-fossil resources (kg Sb eq.)
ADP-fossil	Abiotic depletion potential for fossil resources (MJ)	WDP	Water Deprivation Potential (m ³)

Resource Use Indicators

PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw materials (MJ)	PERM	Use of renewable primary energy resources used as raw materials (MJ)
PERT	Total use of renewable primary energy resources (MJ)	PENRE	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials (MJ)
PENRM	Use of non-renewable primary energy resources used as raw materials (MJ)	PENRT	Total use of non-renewable primary energy resources (MJ)
SM	Use of secondary material (kg)	RSF	Use of renewable secondary fuels (MJ)
NRSF	Use of non-renewable secondary fuels (MJ)	FW	Use of net fresh water (m ³)

Abbreviations continued

Waste Indicators

HW Hazardous Waste (disposed) (kg)

RW Radioactive Waste (disposed) (kg)

NHW Non-Hazardous Waste (disposed) (kg)

Output Flow Indicators

CFR Components for Reuse (kg)

MER Materials for Energy Recovery (kg)

EET Exported Energy, Thermal (MJ)

MR Material for Recycling (kg)

EEE Exported Energy, Electricity (MJ)

Lifecycle Stages / Modules

A1 Raw material supply

A3 Manufacturing

A5 Construction/Installation

B2 Maintenance

B4 Replacement

B6 Operational energy use

C1 Deconstruction/Demolition

C3 Waste processing

D Reuse-Recovery-Recycling potential

A2 Transport

A4 Transport to site

B1 Use

B3 Repair

B5 Refurbishment

B7 Operational water use

C2 Transport to waste processing

C4 Disposal

Other Relevant Terms

SVHC Substances of Very High Concern

CAS No. Chemical Abstracts Service Number

kg Kilogram

NMVOC Non-Methane Volatile Organic Compounds

RC Recycling

P eq. Phosphorus Equivalents

CFC-11 eq. Chlorofluorocarbon-11 Equivalents

kg C Kilograms of Carbon

ND Not Declared

MND Module not declared

EC No. European Community Number

MJ Megajoule

m³ Cubic Meter

Sb eq. Antimony Equivalents

LF Landfill

N eq. Nitrogen Equivalents

CO₂ eq. Carbon Dioxide Equivalents

kg CO₂ eq. Kilograms of Carbon Dioxide Equivalent

INC Incineration

References

- EN 15804:2012+A2
Sustainability of construction works – Environmental product declaration – Core rules for the product category of constructions products
- EPD International (2024)
General Programme Instructions of the International EPD System, version 5.0
- ISO 14020:2022
International Standard ISO 14020 – Environmental statements and programmes for products – Principles and general requirements
- ISO 14025:2006
International Standard ISO 14025 – Environmental labels and declarations — Type III environmental declarations — Principles and procedures
- ISO 14040:2006
International Standard ISO 14040: Environmental Management – Life cycle assessment – Principles and framework. Second edition 2006-07-01.
- ISO 14044:2006
International Standard ISO 14044: Environmental Management – Life cycle assessment – Requirements and Guidelines.

Version history

Original Version of the EPD

2026-04-30

Contact Info

EPD owner

Name Bona AB
Email bona@bona.com
Telephone +46 40385500
Address Murmansgatan 130, SE-200 21 Malmö, Sweden



LCA author

Name CarbonZero AB
Email info@eando.se
Telephone +46 4 317 07 07
Address SE-262 32 Ängelholm, Sweden



Third party verifier

Name Stephen Forson, Viridis Pride Ltd.
Email S.Forson@viridispride.com
Telephone +44 02080589253
Address 124 City Rd, London EC1V 2NX, UK



Program operator

Name EPD International AB
Email support@environdec.com
Telephone +46 (0)73 311 30 20
Address SE-11427 Stockholm, Sweden

