

Bona[®]


Passion for wood floors

Established in 1919, Bona is a world leading innovator with a unique system for wooden floor treatment. Through subsidiaries and distributors we have local presence in more than 90 different countries enabling us to be close to our customers and craftsmen.

Our long commitment and passion for wooden floors enable us to offer lasting, sustainable results that meet all wooden floor needs for professionals and floor owners alike.



©Bona AB, Sweden All rights reserved

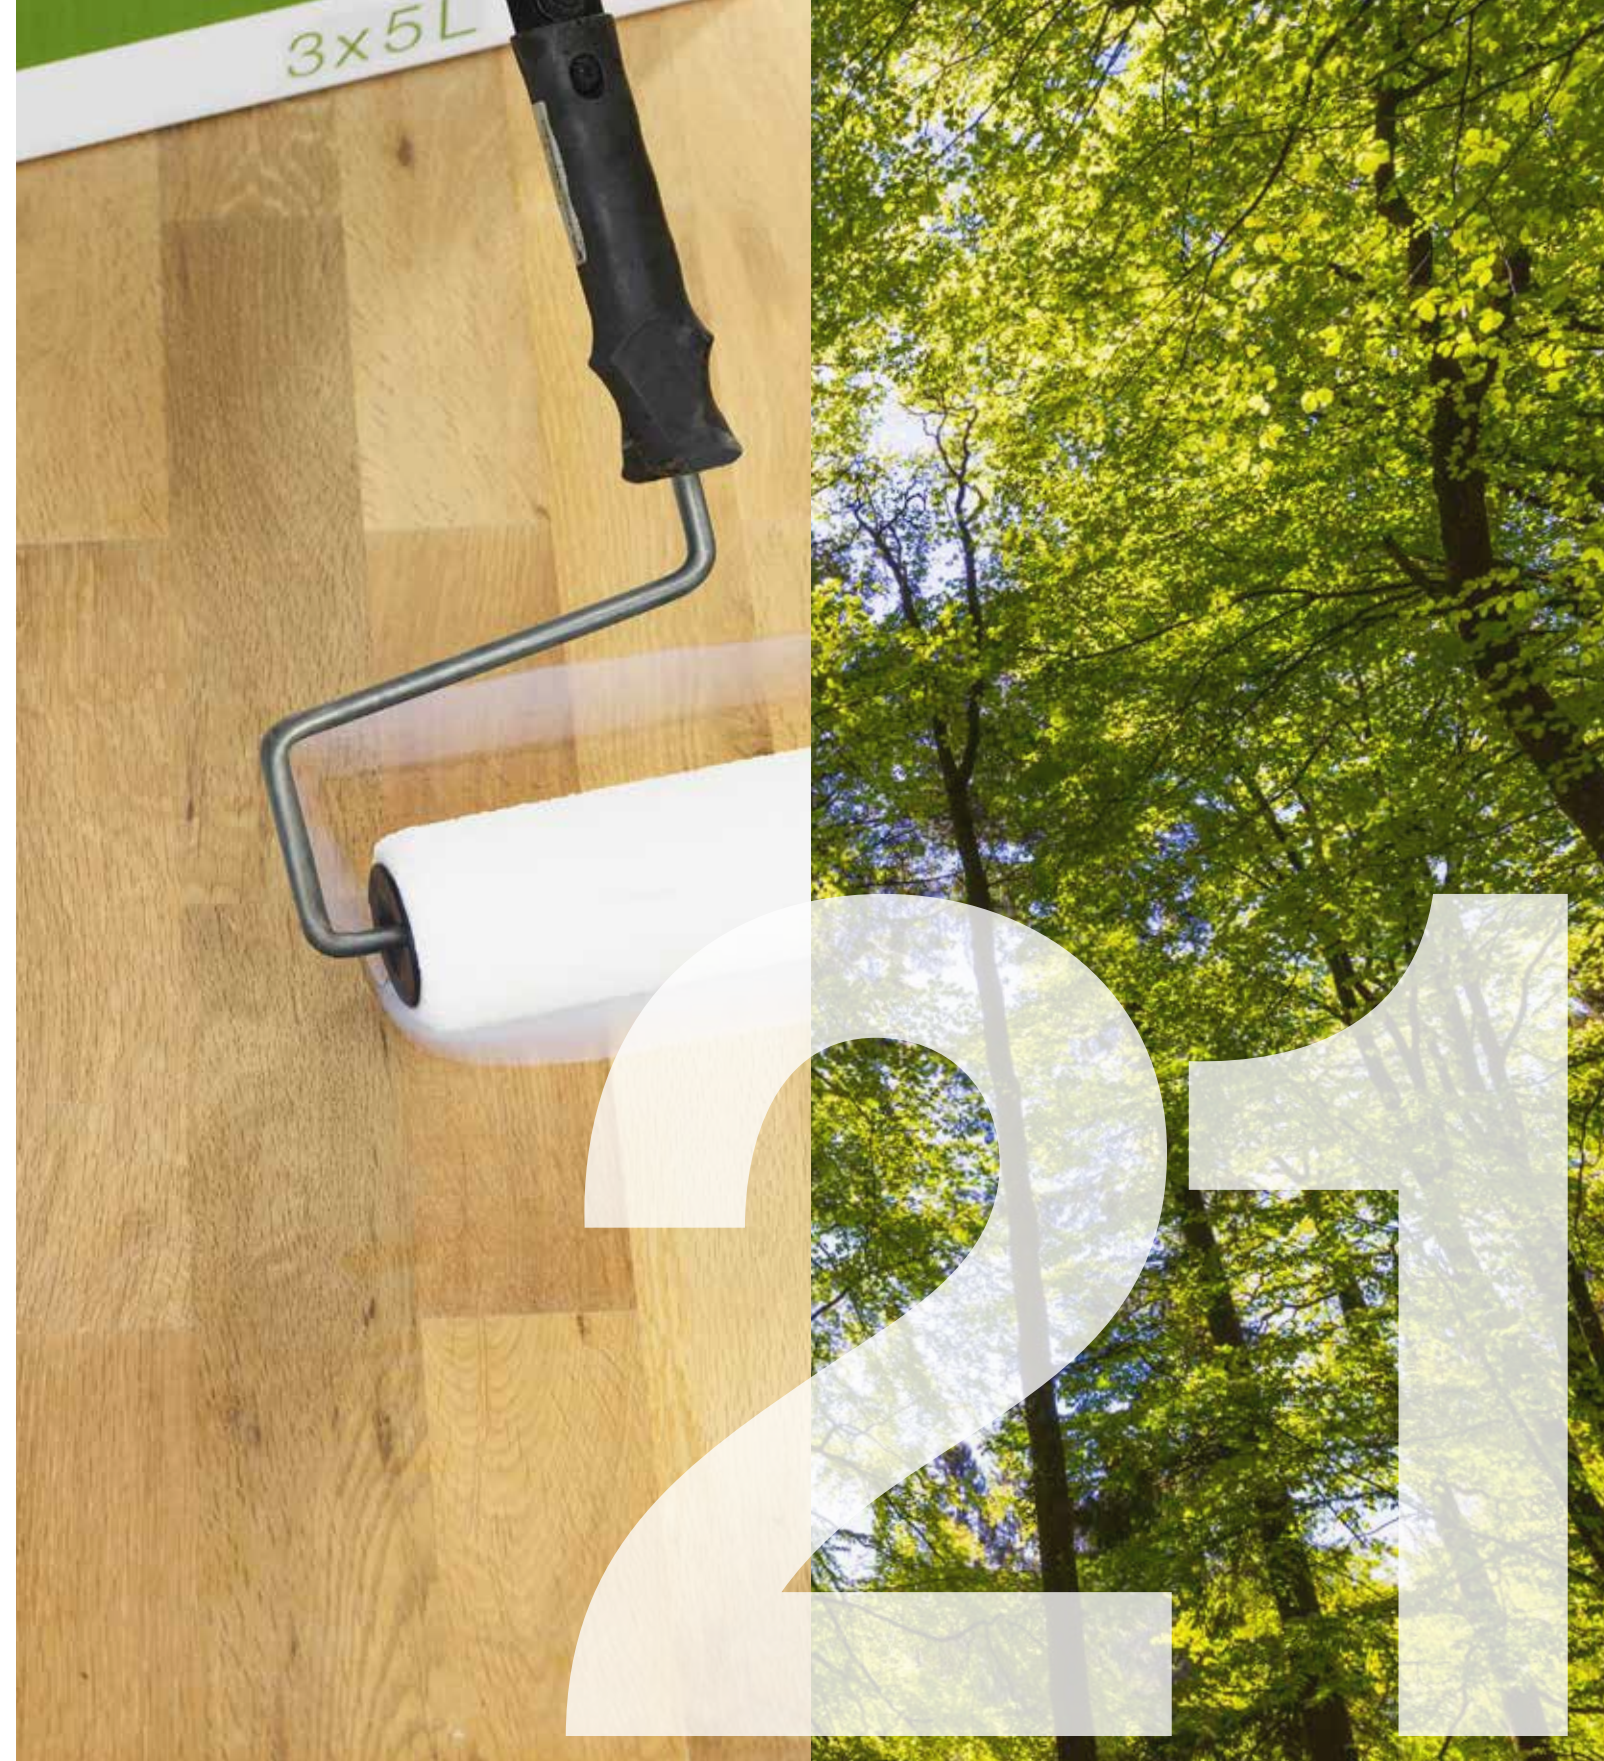

PRODUCT CATALOGUE 2021



Bona[®]

RENOVATION FOR A BRIGHTER FLOOR FUTURE

Welcome to the world of Bona. We are proud to present this year's catalogue, filled with even more innovative sustainable solutions and products. With more than a century of innovation behind us, we continue with passion, performance and pioneering values guiding our journey forward.

This year we focus on innovations with performance and sustainability in mind. We have lots of exciting news, from the expansion of Bona SuperSport System with our one-component sport lacquer, Bona SuperSport ONE, to the long-lasting Bona Green 8600 Ceramic Abrasives, made from a unique composite for better sanding and the domestic floor finish, Bona Domo. All our products and solutions are – as always – developed with health and sustainability in mind, which has been verified in two independent studies this year.

THE BONA SYSTEM

As a professional contractor you can rely on Bona for a full range of solutions, whether your project is a full renovation, protection of newly installed floors, or if you're simply seeking design options. You can be assured that our complete range of solutions deliver performance, value and excellent results with a minimal environmental impact and healthy working conditions. As flooring evolves, so does the Bona System with a growing range of solutions.



IVL STUDY ON RENOVATION

As always, we are leaders in sustainability and health in the field of flooring. For years, Bona has observed the resource-saving benefits of properly maintaining and renovating floors, so we commissioned the independent Swedish institute, IVL, to carry out a scientific study on the climate impact and energy savings to be gained from renovating rather than replacing floors. The environmental effects of are clear. By renovating a floor rather than installing a new one, the energy savings are as high as 95%, as well as up to 90% in reduced carbon footprint.

TRBA STUDY ON HYGIENE

Hygiene and health are increasingly important. Bona believes in providing care and protection that extends beyond the floor. This year, Bona commissioned a study on use of the Bona Resilient System in hygiene-relevant areas; in particular, vinyl flooring. The test was carried out in conjunction with the IFR Institute in Germany. Bona's unique method not only ensures floors remain free from dirt build-up, but also seals surfaces against microorganisms. The result? Floors that look refreshed and revived, with the highest level of hygiene standards adhered by the rules of The Technical Rules for Biological Agents (TRBA), the regulatory body that sets the standard requirements in health and hygiene.


BONA FINISHES

The ever top performing Bona range of waterborne finishes with Bona Traffic in the lead, now launches a new modern domestic finish. Bona Domo has a non-yellowing formula that is easy to apply. With good build and quick drying time, it protects the wood floor in no time. It can be used from start to finish, both as a base- and topcoat and is easy to abrade.

BONA OIL TREATMENT

Whatever the surface, whatever the desired result, Bona's innovative oil system has everything you need to bring out the unique character of your wood floor. Our complete range of oils and effect creating solutions, combined with machines and easy-to-follow process steps, ensure optimal surface results. Bona brings creativity to life. Our range of oils are renewable, made using raw vegetable materials and contain exceptionally low levels of VOC.

Together with Bona's safe and sustainable range of products and solutions, we can renovate all types of surfaces to bring out the beauty, while caring for our health, our floors and the environment.

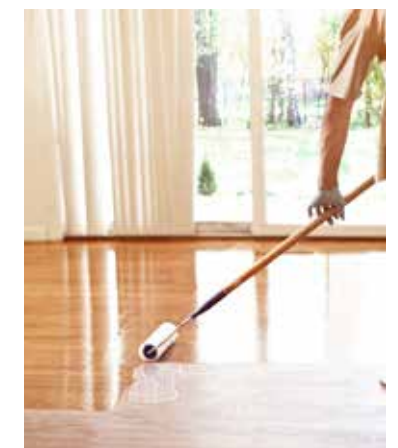



CONTENTS

FASTENING

Screed Repair	6
Moisture Barriers	7
Primers	8
Levelling Compounds	9
Underlayments	11
Water-based Adhesives	12
PU Adhesives - Reactive	13
Silane Adhesives - Reactive	15
Fillers & Repair	19
Other Products	19

SANDING

Dust Free Sanding	22
Belt Sanders	23
Expansion Sanders	26
Edgers	30
FlexiSand System	31
Supraflex	36
Buffing	37
Vacuum Cleaners	39
Other	39
Superior — Ceramic Mix	40
Superior — Green Ceramic	41
Premium — Zircon Mix	43
Stand. — Aluminium Oxide	46
Stand. — Silicon Carbide	47
Pads — Field fo use	49
Scrad Pads	50
Screens	51
Diamond Abrasives	52
Abrasives - Delta	52
Abrasives	53

COATINGS

Primers	56
Lacquers	58
SuperSport System	62
Oils – Wear Treatment	65
Oils – Outdoor	66
Oils - Effect Treatment	67
Resilient — Maintenance	71

FLOOR CARE

Deep Clean System	74
Lacquer — Maintenance	75
Oils — Maintenance	77

TOOLS & ACCESSORIES

Coatings	80
Fastening	86
Measurement	88
Occupational Safety	89
Floor Care	90

APPLICATION ADVICE

Lacquer System	94
Natural Wood Look	95
SuperSport System	96
Craft Oil 2K System	97
Oil System	98
Hard Wax Oil	99
Adhesive Guidelines	100
Index of Bona Adhesives	101

INDEX

Index - Products	102
Index - Article Numbers	104
Index - Article Numbers	105



PRODUCT HIGHLIGHTS

NEW INNOVATIONS FOR 2021

This year the Bona System is improved and expanded with loads of exiting innovations. In this spread we are highlighting some of our new solutions that will improve the fantastic world of floor treatment.

BONA QUANTUM

Our Bona Quantum silane-based floor adhesive takes flooring to the next level of strength, which builds over time. To mark the launch of Bona Quantum, we gave our full silane adhesive product range an overhaul with new labelling and sustainable packaging made out of recycled pails.



BONA SUPERSPORT SYSTEM

Bona SuperSport System gives you a complete solution for unparalleled excellence in application, sports performance and floor maintenance. Fully compatible products and services allows a smoother, easier working process you as a craftsman.



BONA DIAMOND BLADES

Resilient stripping just got better with the world's first Bona Diamond Blades. Bona Diamond Blades is the right choice. The innovative discs speed up the stripping process of resilient floors up to 60% than standard processes. Bona Diamonds Blades – breaking barriers in sanding!

BONA ERGOEDGE

The innovative Bona ErgoEdge provides a faster and upright ergonomic sanding. It enables you to sand wider and closer than ever. Thanks to the 178 mm wide curved discs you can now do 90% of all edge sanding standing upright without shifting machine.



BONA GREEN 8600 CERAMIC ABRASIVE

Our Bona Green 8600 Ceramic Abrasives are long-lasting and tough, yet gentle on wood, with very low fibre ripping. The unique mixture of ceramic and aluminium oxide delivers impressive performance, providing 30% faster and 50% more abrasion than other premium abrasives.

BONA DOMO

Bona Domo is a new member of the Bona family of premium finishes. With good build and a quick drying formula, it protects the wooden floor in no time. Bona Domo can be used from start to finish, both as a base- and topcoat and is easy to abrade.



FASTENING



Success begins with a good foundation. And a good adhesive, with the right combination of strength and elasticity, is the first step to achieving a beautiful and lasting wooden floor. At Bona, our continuous and open dialogue with craftsmen, combined with extensive research and development enables us to provide everything you need for perfection in wood floor craftsmanship. In this section, you will find all the products and accessories you need to lay the best foundation, regardless of subfloor type, moisture and evenness.



1. Screed Repair
2. Moisture Barrier
3. Primers
4. Levelling Compounds
5. Underlayments
6. Water-based Adhesives
7. PU Adhesives - Reactive
8. Silane Adhesives - Reactive
9. Application Tools
10. Fillers & Repair
11. Other Products





FASTENING

Screed Repair

Bona R405



High viscosity, two-component polyester resin for screed repair prior to application of adhesives or levelling compounds.

Key Benefits:

- Quick drying
- High viscosity
- Excellent adhesion to many substrates

Technical Data:

Base: 2-comp polyester resin + hardener
Drying time: 30–60 min
Application: Stainless steel trowel

BR40501400DEBO

1.25 kg

1

60

Bona R440



Bona R440 is a solvent-free (accord. to TRGS 610), two-component silicate based cast resin with very low emission (EC1-R Plus). It is suitable for the fast and non-positive repair and filling of cracks and joints in screeds. Furthermore, it can be used to bond metal profiles and nail bars. Both components can be mixed quickly and easily by shaking. Bona R440 is ready to use within a few seconds.

Key Benefits:

- Very low emission EC1-R Plus
- No tools required for mixing
- Odour-free
- Fast drying

Technical Data:

Base: Sodium Silicate (water glass) and Isocyanides (Hardener)
Colour: Yellow/beige
Viscosity: Fluid
Density: 1.3 g/cm³ (immediately after mixing)

BR44006600DEBO

2 x 300 ml

5 sets

Wave Bonders



Metal strips (70 x 6 mm) for crack repairs in screeds. Use in combination with Bona R405.

AX34040000

100 pieces

100

Bona RenoForce



Bona RenoForce is a fibre glass weave to be used for the reinforcement of existing cracks and construction joints up to 5 mm in width, for screeds, concrete substrates, or between different type of subfloors. The installation of Bona RenoForce is easy and fast. It should be used in combination with either one of our Bona polyurethane adhesives or with the levelling compound Bona H610. One roll equals 36 m².

Key Benefits:

- No hazardous product
- Safe in use, promise a lasting result
- The usage of liquid resins is no longer necessary

Technical Data:

Product type: Sodium-silicate glass fibres
Colour: White
Tensile strength on filament (fibre): 3,500 N/mm²

BH500033

0.8 x 45 m

1

24



FASTENING

Moisture Barriers

Bona R410



A two-component epoxy resin for damp-proofing concrete or cementitious subfloors with up to 5 CM% (or 90% RH) in humidity. Can also be used as a primer for PU and silane adhesives, levelling compounds and as a light reinforcement of weak subfloors.

Key Benefits:

- Excellent damp proofing
- Excellent adhesion to most substrates
- Subfloor strengthening properties

Technical Data:

Base: 2-comp epoxy resin
Pot life: Approx. 20 min
Consumption: Approx. 150–500 g/m²
Application: Brush, roller, mohair roller

BR41002000GBBO

5 kg

1

60

Bona R540



Multipurpose primer/damp-proof membrane for both absorbent and non-absorbent subfloors. Can be used for damp-proofing concrete or cementitious subfloors with up to 4 CM% in humidity. Compatible with Bona's silane and PU adhesives.

Key Benefits:

- Moisture inhibiting
- Excellent penetration properties
- 1-component and ready to use

Technical Data:

Base: 1-comp PU
Drying time: 1–24 h, depending on type of adhesive
Application: Stainless steel trowel, mohair roller, brush

BR54002200M1BO

6 kg

1

60

Bona R590



Bona R590 is a one-component silane based primer for priming and/or sealing the residual moisture in cement screeds or concrete (up to 5%CM / 90 %RH) before installing a wooden floor. It can also be used for the reinforcement of weak subfloor surfaces up to a certain level.

Key Benefits:

- Reinforcing effect
- Suitable for all Bona silane or polyurethane adhesives
- Fast drying
- Product contains no liquid extenders or components that can migrate after curing

Technical Data:

Base: 1-comp silane modified
Drying time: 4-6 h
Tools of application: Bona 500F notched trowel or flat trowel
Consumption: 150-500 g/m²

BR59002300M1BO

8 kg

1

60



FASTENING

Primers

Bona D500



Primer for the preparation of absorbent and non-absorbent substrates prior to the use of dispersion-based parquet adhesives. Binds dust and reduces water absorption of substrate. Note: Not to be used with silane-based adhesives.

Key Benefits:

- Vapor permeable
- Solvent-free
- Good elasticity

Technical Data:

Base: 1-comp acrylate
Drying time: 1–24 h (depending on the subfloor)
Application: Brush, roller
Consumption: 1 part D500 to 1 part water
 Consumption: Approx. 150 g/m² (mixture)

BD50002000MLBO

5 L

3

132

Bona D501



Primer for the preparation of absorbent and non-absorbent substrates prior to the use of silane or polyurethane-based adhesives. Binds dust effectively. Use undiluted.

Key Benefits:

- Vapor permeable
- Solvent-free
- Very quick drying

Technical Data:

Base: 1-comp acrylate
Drying time: 1–2 h
Application: Brush, roller
Consumption: Approx. 150 g/m²

BD50102000MLBO

5 L

3

132

Bona D510



Primer for the preparation of absorbent substrates prior to using levelling compounds. Bona D510 reduces the absorbency of the subfloor and improves flow and adhesion of the levelling compound.

Key Benefits:

- Vapor permeable
- Solvent-free
- Excellent adhesion to many substrates

Technical Data:

Base: 1-comp acrylate
Drying time: 1–24 h (depending on the subfloor)
Application: Brush, roller
Consumption: Approx. 150 g/m²

BD51002000MLBO

5 L

3

132

Bona S100



Bona S100 is a thinner for Bona R410. It can also be used as a cleaning agent for the removal of a wide range of other products or for cleaning tools.

Key Benefits:

- Vapor permeable
- Solvent-free
- Very quick drying

Technical Data:

Base: 1-comp acrylate
Drying time: 1–2 h
Application: Brush, roller
Consumption: Approx. 150 g/m²

BS10002000MLBO

5 L

4

40



FASTENING

Levelling Compounds

Bona H600



A cementitious, self-smoothing levelling compound specially designed for the tough strains wooden floors placed on the subfloor. Also suitable for installation of LVT's (Luxury Vinyl Tiles). Apply to 1.5–10 mm thickness.

Key Benefits:

- Self-smoothing
- Rapid hardening
- High strength

Technical Data:

Base: Cement, synthetic resins
Colour: Light grey
Consumption: 1.4 kg/m²/mm
Layer thickness: 1 - 20 mm
Water needs: ca. 6.5 liter
Slack time*: ca. 5 min (re-stir)
Pot life*: ca. 30 min
Walkable*: after approx. 1.5 to 2 hrs.

BH60042060DE

25 kg

1

40

Bona H605



Calcium sulphate levelling compound with practically no shrinkage and tension for exceptionally smooth surfaces. Suitable for elastic and textile floor coverings as well as parquet glued down with silane adhesives.

Key Benefits:

- Rapid hardening
- Low tension
- Self-levelling

Technical Data:

Base: Alaphahemihydrate
Colour: Beige
Consumption: 1.4 kg/m²/mm
Layer thickness: 1 - 20 mm
Water needs: ca. 5.6 liter
Pot life*: ca. 30 min
Walkable*: after approx. 1 to 2 hrs., depending on the layer thickness

BH60542054M1

25 kg

1

40

Bona H610



Bona H610 is a rapid setting and drying, slump-free mortar for internal repairs. Ideal for filling holes and cracks in screeds, repairing and refacing internal concrete stair treads and risers, cement and sand screeds, concrete floors or making good around pipe work, door and window frames.

Key Benefits:

- Steady adjusted
- Rapid hardening and drying – can be covered after 60 minutes.
- Low tension

Technical Data:

Base: Cement, synthetic resins
Colour: Grey
Consumption: 1.6 kg/m²/mm
Layer thickness: no limitation
Water needs: ca. 5 liter
Pot life*: ca. 15-20 min
Walkable*: after approx. 30 min

BH61042003M1

25 kg

1

40



FASTENING

Levelling Compounds

Bona H660



Bona H660 ML1 is a cementitious smoothing levelling compound specially designed for use under mosaic, multi-layered or solid wood parquet in commercial sectors.

Key Benefits:

- Self levelling
- Self-smoothing
- Quickly walkable
- Applicable in a thickness layer from 1 to 10 mm (with Quartsand up to 20 mm)

Technical Data:

Base: Cement, synthetic resins
Colour: Grey
Consumption: 1.4 kg/m²/mm
Layer thickness: 1 - 20 mm
Water needs: ca. 6.5 - 7 liter
Pot life*: ca. 30 min
Walkable*: after approx. 1.5 to 2 hrs.

BH66042001M1

25 kg

1

42

Bona Fibres



Bona Fibres are alkali-resistant reinforcement glass fibres designed primarily to increase the flexural and structural strength of Bona self-levelling compounds, e.g. Bona H600. In addition, an increase in the adhesion and strength of the levelling compound is also seen. Bona Fibres do not change the handling properties of the Bona levelling compound. The use of Bona Fibres is recommended on flexible subfloors, for example nailed/screwed down planks or board floors, such as chipboard, OSB or plywood, fixed over joints or battens.

Key Benefits:

- Easy to add and mix
- Levelling behavior is unaffected.
- Bona Fibres will remain evenly distributed and will not 'float' to the surface.
- Increases the flexural and structural strength of the Bona levelling compounds

Technical Data:

Base: Alkali-resistant fibreglass
Colour: White
Tensile strength: 1700 N/mm²

BH500031

0.25 kg

50

27 boxes

Bona Expansion Strips



Bona Expansion Strips 50 are self-adhesive foam strips, used in order to avoid sound bridges between levelling compounds and building parts.

Key Benefits:

- Ideal for use with levelling compound and thin screeds
- Self-adhesive, easy and quick to install
- Very good grip
- Remains straight on the wall

Technical Data:

Product type: PE-Foam with fleece backing and fleece socket (self-bonding)
Dimensions: 20 m x 50 mm, rolls
Material thickness: 5 mm

BH500032

20 m

5

90



FASTENING

Underlayments

Bona U300



Bona U300 is an underlayment made of recycled fine PUR foam granules and cork, bound with PUR elastomers. Bona U300 can be used under parquet, laminate floors and other floor coverings. It will reduce the transmission of sound from footfall. It is also suitable for a light stress decoupling.

Key Benefits:

- DIBt approval
- Easy to install
- Suitable for use with various Bona adhesives

Technical Data:

Base: Fine recycled PUR granules and cork
Colour: Brown/black-grey-beige-brown
Fire protection class: Efl (EN 13501)
 Impact sound reduction: Up to 19 dB

2 mm

AX36225002

30 m²

1

11

3 mm

AX36225003

20 m²

1

11

5 mm

AX36225005

16 m²

1

11

Bona U310



Bona U310 is a polyester spunbond fleece that reduces the stress transferred to the subfloor when laying prefabricated parquet, solid parquet and laminate on old parquet or other critical subfloors. Hairline/shrinkage cracks in mineral sub floors can be bridged up to a width of 0.5 mm. Due to its high tear resistance, the decoupling fleece reduces tensions from the subfloor and keeps them away from the subsequent top layer.

Key Benefits:

- Easy to cut
- Stress relieving
- Suitable for use with various Bona adhesives
- DIBt approval

Technical Data:

Base: Polyester spunbond
Colour: Light green
Weight: 160 g/m²
Thickness: 0.8 mm


1 mm

AX36310003

50 m²

1

Bona U340



Bona U340 is a polyester fibre board underlay (4 mm) that reduces the stress transferred to the subfloor when installed prior to the final floor covering e.g. ceramic tiles, natural stone, wooden flooring, etc. Its high compressive strength renders it capable of tolerating high loads (up to 5.0 kN/m²). It is suitable for use in domestic and commercial premises. Additionally, acoustic dampening for all floor types is significantly improved. It is easy to cut, shape and install and is unaffected by dampness and fungal decay.

Key Benefits:

- Reduces subfloor stress
- Bridges cracks/breaks in the subfloor
- Traffic load up to 5 kN/m²
- DIBt approval

Technical Data:

Product/material: Polyester bonded Fibre board
Dimensions: 1000 x 600 x 4 mm
Weight: 4 mm = 3.1 kg/m²
Compressive strength: (DIN 53456) 10 N/mm²
Bending strength: (DIN 53453) 2 N/mm²
Tensile strength: (DIN 53457) 6.0 N/mm²
Floor-load capacity: 5.0 kN/m²
Thermal conductivity: 4 mm = λ 0.11 W/(mK)
Thermal resistance: 4 mm = 0.04 m²K/W
Fire resistance class: E (fl) acc. to EN 13501

1 mm

AX36310003

50 m²

1



FASTENING

Water-based Adhesives

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona D705



Hard dispersion-based adhesive, characterised by its strong adhesion properties and longer open time. Suitable for a wide range of parquets.

Key Benefits:

- Extended open time
- Strong adhesion
- Broad functionality

Technical Data:

Base: 1-comp PVAC
Open time: ca. 20 min
Consumption: ca. 850-1250 g/m²

BD70504700M1BO

22 kg

1

24

Bona D720



Hard dispersion based adhesive with low water content and very rapid setting properties. Suitable for a wide range of parquet installations. Free from solvents and completely odourless. Firm texture and very easy to spread.

Key Benefits:

- Rapid setting
- Retains trowel pattern
- High strength

Technical Data:

Base: 1-comp PVAC
Open time: ca. 15 min
Consumption: ca. 850-1250 g/m²

BD72002800M1BO

22 kg

1

24

Bona D750



Solvent-free, fibre-reinforced dispersion adhesive for the installation of PVC-category floors on absorbent sub-floors. It has excellent grab, and is ideal for use with PVC-category floors. Thanks to its high shear resistance, D750 helps in minimising joint formation (in e.g. PVC design tiles). For interior use only.

Key Benefits:

- High shear strength
- Quick and excellent grab
- No venting required, floor coverings can be placed directly

Technical Data:

Base: 1-comp PVAC, fibre-reinforced
Colour: Beige
Application: Notched trowel
Venting time: ca. 5 min*
Open time: ca. 30 min*
Consumption: ca. 200-300 g/m²

BD7500220SKCZBO

6 kg

1

60

BD75002200DEBO

6 kg

1

60

BD75002700M1BO

14 kg

1

32



FASTENING

PU Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona R200



Liquid repair material for filling hollow spots in parquet floors as well as reattaching loose elements and boards. Once injected the material expands and effectively fills up the hollow space.

Key Benefits:

- Simple solution to a difficult problem
- Excellent adhesion properties
- Contains no water or solvents

Technical Data:

Base: 1-comp PU
Drying time: 4 h

BR20005900M1BO

530 g

6

Bona R777



Bona R777 is a polyurethane parquet adhesive that hardens without shrinking, through a chemical reaction. It is especially suitable for timbers that are particularly sensitive to swelling/ moisture and for low/non-absorbent substrates.

Key Benefits:

- Water and solvent free
- No swelling of the wood
- Excellent adhesion to most substrates
- Firm texture, retains trowel pattern

Technical Data:

Base: 2-comp PU
Colour: Component A: beige
 Component B: brown
Application: Notched trowel
Pot life: Approx. 50 min
Open time: Approx. 120 min
Consumption: 850-1250 g/m

BR77702700M1BO

14 kg

1

BR77705000M1BO

7 kg

1

Bona R778



Two-component, hard parquet adhesive. Bona R778 has very long open time and particularly good rib stability that simplifies the installation of wooden planks. Containing no water or solvents, it is particularly suitable for wood species and parquet types sensitive to moisture as well as low/non-absorbent subfloors. Able to withstand very high thrust from wood movement and creates a rigid, stable floor.

Key Benefits:

- Good ridge stability
- Strong and stabilizing
- Allows load after 24 h

Technical Data:

Base: 2-comp PU
Density: 1.7 g/cm³
Colour: Component A: Beige
 Component B: brown
Application: Notched trowel
Pot life: Approx. 40 min
Open time: Approx. 110 min
Consumption: 850-1250 g/m

BR77802400M1BO

10 kg

1

60



Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Titan



Bona Titan is a powerful and hard adhesive, containing revolutionary Titanium Technology. Suitable for use on all types of wood floor installations, including oversized elements. Quadruple crosslinking system ensures fast, safe and complete hardening, even under unfavorable conditions.

Key Benefits:

- Extremely good grab for easy installation
- High shear strength
- Allows load after 6 hrs

Technical Data:

Base: 1-comp silane modified
Density: 1.7 g/cm³
Colour: Beige
Application: Notched trowel
Open time: ca. 30 min
Consumption: ca. 850-1500 g/m²

BRTIT02800M1BO

15 kg

1

44

BRTIT06809M1BO

9 kg

2

30

Bona Quantum



Bona Quantum featuring Bona's revolutionary Titanium Technology. The formula delivers outstanding strength that evolves over time – giving optimal strength once set. Its unique formula offers the advantages of both hardelastic and hard adhesive in one effective product. Bona Quantum is a great all-round product that delivers fantastic performance, whatever the job.

Key Benefits:

- Titanium crosslinking technology
- Built-in moisture barrier
- Allround usage
- High shear strength

Technical Data:

Base: Silane modified pre-polymers
Colour: Oak tone
Application: Notched trowel
Open time: ca. 40 min
Consumption: ca. 850-1500 g/m²
Consumption with Trowel Plus: ca. 2000-2200 g/m²

BRQUA05609M1BO

9 kg

1

60

BRQUA02800M1BO

15 kg

2

44

Bona Quantum T



Bona Quantum T holds all the great benefits and performance of Quantum, but in a thicker formulation. The formula delivers outstanding strength that evolves over time – giving optimal strength once it sets. It offers the advantages of both a hard-elastic and a hard adhesive in one effective product.

Key Benefits:

- Titanium crosslinking technology
- Built-in moisture barrier
- Allround usage
- High shear strength

Technical Data:

Base: Silane modified pre-polymers
Colour: Oak tone
Application: Notched trowel
Open time: ca. 40 min
Consumption: 850-1500 g/m²
Consumption with Trowel Plus: ca. 2000-2200 g/m²

BRQUAT2800M1BO

15 kg

1

44

BRQUAT5601M1BO

1 kg

20

36

BRQUAT5703M1BO

3 kg

6

30

BRQUAT5845M1BO

4,5 kg

4

21

BRQUAT6809M1BO

9 kg

2

30



Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona R848



Bona R848 is an ISO 17178 standard elastic, one-component, Silane-based adhesive, suitable for dimensional, stable, multilayered and engineered parquet. Bona R848 reduces tension to the sub floor. The use of a primer is generally not necessary. The adhesive hardens due to a chemical reaction with moisture.

Key Benefits:

- Easy to apply
- Fast initial bonding strength allows load after 24 h
- Good ridge stability

Technical Data:

Base: 1-comp silane modified
Density: 1.6 g/cm³
Colour: Beige
Shelf life: Up to two years
Application: Notched trowel
Open time: ca.. 30 min
Consumption: ca. 850-1250 g/m²

BR84802800M1BO

15 kg

1

44

BR8485601M1BO

1 kg

20

36

BR8485845M1BO

4,5 kg

4

21

BR8486809M1BO

9 kg

2

30

Bona R848T



Bona R848T is a higher viscous version of Bona R848. It is an ISO 17178 standard elastic, one-component, silane-based adhesive. Best known for its improved rib stability and quick initial bonding strength, Bona R848T can be used for the installation of solid timber floors; including overlay, parquet, blocks and engineered floors.

Key Benefits:

- Easy to apply
- Fast initial bonding strength allows load after 24 h
- Up to two year shelf life
- Perfect rip stability, no risk of hollow spots

Technical Data:

Base: 1-comp silane modified
Density: 1.6 g/cm³
Colour: Beige
Application: Notched trowel
Open time: Approx. 30 min
Consumption: ca. 850-1250 g/m²

BR848T2800M1BO

15 kg

1

44

BR848T5601M1BO

1 kg

20

36

BR848T5703M1BO

3 kg

6

30

BR848T5845M1BO

4,5 kg

4

30

BR848T1645M1BO

4,5 kg (98,5 mm)

4

21

BR848T6809M1BO

9 kg

2

30

Bona R880



Bona R880 is a strong, elastic construction adhesive based on silane. Contains no plasticisers and can be used to glue many different materials. Specially designed for repair works on silane-bonded floors but also for skirting boards and similar applications.

Key Benefits:

- Quick grab and hardening
- High strength
- Excellent adhesion properties

Technical Data:

Base: 1-comp silane modified
Density: 1.4 g/cm³
Colour: Beige
Application: Adhesive gun
Open time: Approx. 10 min
Application of load: 4-8 h

BR88000300M1BO

330 ml

12

100



Evolving strength

BONA QUANTUM – TITANIUM TECHNOLOGY ADHESIVE

Bona Quantum represents the new generation of silane-based adhesives, featuring Bona’s revolutionary Titanium Technology. The brand new formula delivers outstanding strength that evolves over time – giving optimal strength once set. Its unique formula offers the advantages of both hard-elastic and hard adhesive in one effective product. Bona Quantum provides long-lasting performance and a stable result.

Bona Quantum is a great all-round product that delivers fantastic performance, whatever the job.



FASTENING

Application Tools	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
-------------------	------	----------------	-----------	-----------------------	----------------

Cartridge Applicator



Cartridge Applicator for 310 ml cartridges or 600 ml tubular bags (e.g. Bona Quantum T).

310 ml	AT32040000		1	
600 ml	AT32042000		1	

Bona OptiSpread



Bona OptiSpread System consists of the Bona OptiSpread 2.0 for the application of our 4.5 kg adhesive sausages, and the Bona OptiSpread 100 for the application of our 9 kg adhesive sausages. Both applicators are equipped with a powerful 18.8 V lithium battery. The specific nozzles with 250 or 500 mm width are ideal for the fast installation of wood floors in both residential and commercial areas.

- Key Benefits:**
- For fast, ergonomic and clean application of adhesives to residential areas
 - Reduces adhesive waste, empties the entire adhesive tube
 - High quality, non-corrosive body

OptiSpread 2.0	AT32046051	4.5kg		
OptiSpread 100	AT32046052	9 kg		

ACCESSORIES

Nozzle Adapter	AT32046053	500 mm		
Nozzle Adapter	AT32046054	250 mm		
Thread Cap for Nozzles	AT32046055			
Spare Nozzle 1250 F	AT32046056	250 mm		
Spare Nozzle 850 F	AT32046057	250 mm		
Spare Nozzle 1250 F	AT32046058	500 mm		
Spare Nozzle 1500 F/G	AT32046059	500 mm		
Plastic Caps for Nozzles	AT32046060			

Bona Trowel 500F



Notched trowel appropriate for applying Bona R590, silane-based damp-proof membrane.

500F (A3)	AT31400280	180 x 150 mm	10	
500F (A3)	AT31400380	250 x 150 mm	10	



Application Tools

Bona Notched Trowel



Notched trowels for adhesive application.

Type	Article Number	Packaging	Pcs/transport package	Package/pallet
200F (A2)	AT31413180	180 x 150 mm	10	
200F (A2)	AT31413250	250 x 150 mm	10	
850F (B3)	AT31401180	180 x 150 mm	10	
850G (B6)	AT31402180	180 x 150 mm	10	
850G (B6)	AT31402250	250 x 150 mm	10	
1000F (B8)	AT31403180	180 x 150 mm	10	
1000G (B10)	AT31404180	180 x 150 mm	10	
1000G (B10)	AT31304250	250 x 150 mm	10	
1250F (B12)	AT31405180	180 x 150 mm	10	
1250G (B13)	AT31406180	180 x 150 mm	10	
1500F (B14)	AT31409180	180 x 150 mm	10	
1500G (B16)	AT31410180	180 x 150 mm	10	

Bona Trowel Plus



Custom trowel for gluing down wood floors while establishing a moisture barrier in the same stroke in combination with Bona Quantum/Quantum T.

	AT31400170			
--	------------	--	--	--

Bona Master Trowel

A basic adhesive trowel for holding notched trowels in different sizes. Application width 280 mm. To be used with Bona Notched Trowel Box.

	AT31413251	280 x 150 mm		
--	------------	--------------	--	--

Bona Notched Trowel Box

Plastic box with 10 trowel blades to be used with Bona Master Trowel.

TKB A2	AT31413252		10	
TKB A3	AT31413253		10	
TBK B1	AT31413254		10	



Fillers & Repair

Bona Gap Master



Bona Gap Master is an acrylic-based mastic for sealing gaps towards skirting boards and thresholds in connection with wooden floors. It can also be used to repair damages and to fill gaps and cracks in the floor.

Key Benefits:

- Permanently elastic (max 15% tolerance)
- High initial and final bonding strength
- Odourless

Technical Data:

Material: Acrylate

Drying time: approx. 18–24 h. Full hardness is achieved after approx. 2–3 days depending on climate and size of gap.

Consumption: Depends on size of the gap.

RAL 7030	AF4411312500	310 ml	12	60
Dark Beech	AF4411311000	310 ml	12	60
Ash/Fir	AF4411311100	310 ml	12	60
Dark Oak	AF4411311200	310 ml	12	60
White	AF4411311300	310 ml	12	60
Maple	AF4411311400	310 ml	12	60
Light Beech	AF4411311500	310 ml	12	60
Light Oak	AF4411311600	310 ml	12	60
Cherry	AF4411311700	310 ml	12	60
Bog Oak	AF4411311800	310 ml	12	60
Wenge	AF4411311900	310 ml	12	60
Black	AF4411312000	310 ml	12	60
Nut	AF4411312100	310 ml	12	60
Teak	AF4411312200	310 ml	12	60
Reddish Exotic Wood	AF4411312300	310 ml	12	60

Other Products

Quartz Sand



Fine quartz sand for distribution onto wet R410 and R590. Can also be added to Bona levelling compounds for greater application thickness. Grain size 0,3 – 0,8 mm.

AX36500000	25 kg	1	40
------------	-------	---	----



1. Dust Free Sanding
2. Belt Sanders
3. Expansion Sanders
4. Edgers
5. FlexiSand System
6. Supraflex
7. Buffing
8. Vacuum Cleaners
9. Other
10. Abrasives



SANDING



The key to great sanding results lies in the perfect combination of machines and abrasives used. Bona sanding tools not only deliver exceptional results, our systems are also developed with maximum efficiency, ergonomics and safety in mind. With innovations such as dust-free sanding, we continuously strive to find new ways to improve the craftsman's working environment and process. This year we've pushed the boundaries by introducing new innovations to Bona PowerDrive Connect; Bona ErgoEdge and Bona Diamond Blades. Used in combination with Bona FlexiSand 1.9, now you can achieve even more thanks to our click-on technology, which enables you to switch between disc and brush attachment in just a minute.



SANDING | MACHINES

Dust Free Sanding

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona DCS 70



The Bona DCS 70 is a powerful H -classified vacuum unit for dust-free sanding. Its two-step cyclonic separation and unique filter design effectively contains dust within the machine. Even changing the dust bag can be done completely dust free. With the DCS 70 connected to the sanding machine there is no need to seal off connecting rooms or cover paintings and bookshelves. In addition, it provides a cleaner, healthier working environment, compared to using regular dust bags on the sanding machine.

Key Benefits:

- Dust-free sanding
- Ergonomic design and convenient transportation
- Low power consumption
- Quick and dust free swap of dust bags
- Unique seamless dust bag solution using LongoPac

Technical Data:

Weight: 38 kg
Dimensions: 800 × 600 × 1200 mm
Dust holding capacity: 70 L
Motor power: 230 V- 50–60 Hz, 1,4kW
Airflow with 7.5 m hose: 250 m³ per hour
Coarse filter: Conical folded polyester filter, 1 m³
Fine filter: class H 13 (99.996%, 0.3 µM), 0.66 m³
Hose aperture: 35 mm diameter
Hose length: 7.5 m including connection adapters

AMO530005

1

1

Dust Bags LongoPac

LongoPac for Bona DCS 70. 20 meters long. Sold in a set of four.



ASO539001

20 m

1

Adapter Kit 1

Adapter Kit for connecting the Bona DCS 70 to non-Bona machines such as Lägler Hummel, Superhummel, Elf and Profit.



ASO539910

1

Adapter Kit 2

Adapter for connecting the Bona DCS 70 to Lägler Flip.



ASO539920

1



SANDING | MACHINES

Dust Free Sanding

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona DCS 25



The Bona DCS 25 is a powerful H-classified vacuum cleaner for dust-free sanding. It can be connected to most Bona sanding machines. It meets the highest requirements for vacuum cleaners within the construction industry today, yet it is easy to transport and bring to site.

Key Benefits:

- Dust-free sanding
- Smaller size for convenient transportation
- Low power consumption
- Electrical outlet with automatic start/stop
- 7,5 m non marking hose

Technical Data:

Weight: 20 kg
Dimensions: 550 × 500 × 1070/830 mm
Dust holding capacity: 25 L
Motor power: 230 V- 50–60 Hz, 1,45 kW
Airflow: 194 m³ per hour

AMO540000

1

1

Fleece Dust Bag



Disposable fleece dust bag for DCS 25.

ASO540001

1

10

Belt Sanders

Type

Article Number

Voltz/Hertz

Pcs/transport
package

Effect

Bona Belt UX

With the Bona Belt UX of user improved sanding solutions, you'll experience why we are the professionals choice since more than a century. Bona -making every working day better.

Key Benefits:

- Better for you, better for the floor
- Safety and convenience
- Experience the difference

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 750 mm
Motor power: 2.2 kW/4kW
Total weight: 85 kg

200 mm

AMK173100

230 V / 50 Hz

1

2.2 kW

200 mm

AMK171110

220 V / 60 Hz

1

2.2 kW



Bona Capricorn

For sanding of all kinds of wooden and parquet floors by users of all proficiency levels: professionals, semiprofessionals or DIY users

Key Benefits:

- Compact, yet effective
- "Dead man" electrical safety feature on handle
- Easy fitting and changing of paper sleeve, no tools needed
- Step-less pressure adjustment

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 551 mm
Motor power: 2.2 kW
Total weight: 94.2 kg
Drum Revolutions: 2560 rpm

200 mm

AMO190001

230 V / 50 Hz

1

2.2 kW

200 mm

AMO190002

230 V / 50 Hz

1

2.2 kW





SANDING | MACHINES

Belt Sanders

Bona Belt HD



Belt Sander that makes big jobs seem small. It is a true heavy-duty machine with tremendous power and very effective. The unique dual-speed pulley system and infinite drum pressure adjustment guarantee optimum sanding quality regardless of wood species. It can be easily disassembled into three parts, and quickly reassembled. Power, reliability and capability are some of the benefits of this effective all-around belt sander. For optimal dust reduction, the Bona Belt HD is compatible with Bona DCS 70.

Key Benefits:

- Heavy weight for powerful sanding
- Dual speed for optimum sanding results
- Easy fitting and changing of paper
- Can fit distressing drums to texture wood floors on site

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 750 mm
Motor power: 2.2/3.0/3.7 kW
Total weight: 80/83/85 kg
Drum revolutions: 1850/2050 rpm

200 mm	AMK172000	230 V / 50 Hz	1	3 kW
--------	-----------	---------------	---	------

Transport Cart



Transport cart that simplifies transportation of the Bona Belt HD and protects the machine wheels from damage.

ASK6999940006			1	
---------------	--	--	---	--

Bona CEE Adapter



Enables the Bona Belt and the Bona DCS 70 to be used with a regular 230 V cable.

ASO903670			1	
-----------	--	--	---	--

External Soft Start



External soft-start unit for reducing the potential for fuse breakage. For machines without built in soft- or easy-start systems.

ASO903680			1	
-----------	--	--	---	--



SANDING | MACHINES

Belt Sanders

Bona Belt



Powerful belt sander with compact design for easy maneuvering and handling. The Bona Belt takes on any wooden floor and with its easy-start motor, only a 10 Amp fuse is needed for it to run. All adjustments can be made from the top of the machine and the sanding drum is easily changed to another width if needed. The unique drum construction makes changing abrasive belts a job done in seconds. Bona Belt has a highly efficient vacuum unit that minimizes dust. For optimal dust reduction, connect it to Bona DCS 70.

Key Benefits:

- Powerful wood floor sander
- Ergonomic design with convenient lifting and lowering of the sanding drum
- Disassembles easily for easier transportation
- Easy-start motor

Technical Data:

Drum width: 200 & 250 mm
Sanding belt size: 200 x 750 mm alt. 250 x 750 mm
Motor power: 1-phase Europe/Asia 2.2 kW
Total weight: 74 kg
Dust discharge: < 2 mg/m³ air

250 mm	AMO110000.3	230 V / 50 Hz	1	2.2 kW
200 mm	AMO110001.3	230 V / 50 Hz	1	2.2 kW

Extra Weight



An extra 7 kilos for the Bona Belt for increased stability and sanding performance.

7 kg	ASO991110		1	
------	-----------	--	---	--

Transport Cart



Transport cart that simplifies transportation of the Bona Belt and protects the machine wheels from damage.

ASO995022			1	
-----------	--	--	---	--

Bona Belt Lite



The Bona Belt Lite is a compact belt sander able to do great jobs for its size. Designed to provide the perfect combination of efficiency, power and agility. It can be easily disassembled into three parts, and quickly reassembled in a few simple steps. For optimal dust reduction, the Bona Belt Lite is compatible with Bona DCS 70.

Key Benefits:

- Optimal balance between weight and drum pressure
- Superior maneuverability
- Easy fitting and changing of paper

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 750 mm
Motor power: 2.2 kW
Total weight: 60 kg
Drum revolutions: 2400 rpm

200 mm	AMK175000	230 V / 50 Hz	1	2.2 kW
200 mm	AMK175010	220 V / 60 Hz	1	2.2 kW



SANDING | MACHINES

Expansion Sanders

Bona Scorpion



Expansion drum sanding machine designed to be a lightweight professional tool that can be easily and very safely operated by any user. Unique electrical power supply safety features such as the “dead man’s grip” handle guarantee safe operation. Bona Scorpion is the perfect combination of functionality, reliability, safety and ease of use.

Key Benefits:

- Compact yet effective
- Step-less pressure adjustment
- Easy fitting and changing of paper
- Can fit distressing drums to texture wood floors on site

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 480 mm
Motor power: 1.15 kW
Total weight: 45 kg
Drum revolutions: 3300 rpm

200 mm	AMK180000	230 V / 50 Hz	1	1.5 kW
200 mm	AMK180011	115 V / 60 Hz	1	1.5 kW

Bona Scorpion DCS



Delivering the same performance and ease of operation as the Bona Scorpion, the DCS version comes with the attached Dust Care System which operates on an independent switch, and it can also be connected to other machines. Bona Scorpion DCS is the perfect combination of functionality, reliability, safety, ease of use and dust-free sanding.

Key Benefits:

- DCS vacuum on board
- 3-step pressure adjustment
- Easy fitting and changing of paper
- Can fit distressing drums to texture wood floors on site

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 480 mm
Motor power: 1.3 kW + 1.2 kW (vacuum unit)
Total weight: 43 kg
Drum revolutions: 3000 rpm

200 mm	AMK185000	230 V / 50 Hz	1	1.3 kW
200 mm	AMK185010	115 V / 60 Hz	1	1.3 kW

Microfibre Dust Bag Large



Disposable Microfibre Dust Bag for belt and expansion sanders.

Key Benefits:

- Rip-resistant
- Reduces airborne dust
- Easy to change

ASO991011			1	
-----------	--	--	---	--



SANDING | MACHINES

Expansion Sanders

Tynex Distressing Drum



Distressing drums for Belt Sanders. Tynex for fine brushing.

195 mm	ASK6099940046	Bona Belt HD	1	
195 mm	ASK2999940046	Bona Scorpion	1	

Metal Distressing Drum



Distressing drums for Belt Sanders. Metal for rough brushing.

195 mm	ASK6099940045	Bona Belt HD	1	
195 mm	ASK2999940045	Bona Scorpion	1	



The ultimate sanding experience

BONA UX FAMILY – SANDING AS IT SHOULD BE

Always close to everyday challenges of the flooring contractor, we have been listening to our users, the craftsmen working with sanding day-to-day, and their different needs. With these insights, Bona is now launching an improved user experience-based sanding family, the Bona UX family, including a brand-new belt and edger. With the use of modern technology, Bona has developed a user-friendly sanding solution that is powerful yet easy and sound, to help you create the perfect floor surface. All to ensure you get the ultimate sanding experience.



SANDING | MACHINES

Edgers	Type	Article Number	Voltz/Hertz	Pcs/transport package	Effect
Bona Edge UX		Bona Edge UX always close to everyday challenges of the flooring contractor, we listen to your experiences. Bona improves and develops innovative solutions that makes a difference, creating a new sanding experience. For professionals, by professionals.			
		Key Benefits: • Easy to use • Safety features • Dust free sanding • New Light technology • Less risk of sanding marks Technical Data: Total weight: 15.5 kg Sanding arm length: 130 mm/220 mm Disc speed: 3000 rpm			
		130 mm	AMO230600	230 V / 50Hz	2.2 kW
		220 mm	AMO230500	230 V / 50Hz	2.2 kW
Bona CombiEdge		A lightweight and flexible edge sander. Easily switches between a 120 mm short-arm edger or a 330 mm long-arm sander in just a few simple steps. The 330 mm arm provides excellent reach under deep toe kicks and radiators. The lightweight and highly efficient edge-sanding machine is also fitted with a frontal LED light for better visibility. For optimal dust reduction, the Bona CombiEdge is compatible with Bona DCS 70.			
		Key Benefits: • Arm easily replaced for sanding under stairs • Lightweight construction • Integrated LED Technical Data: Disc diameter: 150 mm Total weight: Short arm 7.5 kg; Long arm 8.3 kg Length sanding arm: 120 /330 mm Disc speed: 3300 rpm Dust discharge: < 2.0 mg/m³			
		120 mm	AMK280100	230 V / 50 Hz	1.15 kW
		120 mm	AMK280010	115 V / 60 Hz	1.15 kW
		330 mm	AMK281100	230 V / 50 Hz	1.15 kW
		330 mm	AMK281010	115 V / 60 Hz	1.15 kW
		120/330 mm	AMK282010	230 V / 50 Hz	1.15 kW
		120/330 mm	AMK282100	230 V / 50 Hz	1.15 kW
Bona DualEdge		Steering sander that is extremely easy to operate due to the counter-rotating 100 mm dual-head discs. The discs deliver forgiving sanding action, stability, high speed and force the dust towards the dust extractor. Bona DualEdge is equipped with a front LED for better illumination of the working area. This revolutionary concept greatly increases working speed. For optimal dust reduction, the Bona DualEdge is compatible with Bona DCS 70.			
		Key Benefits: • Counter-rotating dual-head discs • Sands close to corners – less fine sanding needed • Lightweight construction Technical Data: Disc diameter: 100 mm Total weight: 9 kg Length sanding arm: 155 mm Disc speed: 4500 rpm			
		155 mm	AMK270000	230 V / 50Hz	1.15 kW
		155 mm	AMK270010	115 V / 60Hz	1.15 kW



SANDING | MACHINES

Edgers	Type	Article Number	Voltz/Hertz	Pcs/transport package	Effect
Microfibre Dust Bag Small		Disposable Microfibre Dust Bag for edge sanders.			
		Key Benefits: • Rip-resistant • Reduces airborne dust • Easy to change			
		ASO992011		2	
Bona CombiEdge Stair Support		Attachment to CombiEdge for making sanding of stairs easier by creating stability support.			
		330 mm	ASK66000030150	1	1

Bona around the world

YMCA SPORTS FLOOR
NORTH CAROLINA, USA

TURNING A SPORTS FLOOR INTO A PIECE OF ART

When US contractor, Sport Flooring Group, was to refinish and paint a YMCA basketball court in North Carolina they used products from Bona to create a stunning 24-color sports floor in just 2 days.

A purple-hued, paint-infused Bona stain was applied to the borders before adding two coats of Bona sealer. When the painting was completed, they abraded it and applied three coats of Bona water-based finish. The one-of-a-kind sports floor was unveiled during NBA All Star Week and will hopefully bring joy to basket playing kids for many years to come.



SANDING | MACHINES

FlexiSand System	Type	Article Number	Voltz/Hertz	Pcs/transport package	Effect
Bona FlexiSand 	A powerful and flexible machine that can be equipped with different drive plates for a wide variety of floor preparation jobs. Its robust construction ensures stable operation, even under heavy load. Bona FlexiSand is compatible with the Bona PowerDrive, a unique drive plate that allows powerful, direction-free sanding down to the bare wood. Available with a 1.5 and 1.9 kW motor.				
	Key Benefits:	Technical Data:			
	• Powerful single-speed motor • Foldable handle reduces space during transportation • Large wheels for easy transportation • Bona PowerDrive ready	Abrasive disc speed: 147 rpm Motor Power: 1.5/1.9 kW Total weight: 45 kg Height/Width/Depth: 1170 mm / 490 mm / 640mm			
	Ø 407 mm	AMO310002	230 V / 50 Hz	1	1.9 kW
	Ø 407 mm	AMO310001	230 V / 50 Hz	1	1.5 kW
Ø 407 mm	AMO310007	220 V / 60 Hz	1	1.9 kW	
Extra Weights 	For increased power during coarse sanding with the Bona FlexiSand 1.9.				
	ASK3199940008	2 x 7 kg	1		
Bona PowerDrive 	The innovative Bona PowerDrive, to be used exclusively with the Bona FlexiSand 1.9, sets a new standard in sanding down to the bare wood. Using a direction-free sanding technique, the drive combines excellent performance with easy operation. Four rotating discs sand closely to the walls reducing the need for edge sanding. The geared plate and revolving discs also deliver increased power for excellent performance in bare wood sanding when used in combination with Bona 8700 Ceramic abrasives.				
	Key Benefits:	Technical Data:			
	• For powerful rotary sanding to bare wood • Reduces need for edge sanding. Only leaves a 3 cm strip against the wall. • Delivers a fantastically fine and smooth sanding result • Failsafe, no risk of drum marks and similar	Compatible with: Bona FlexiSand 1.5 No. of discs: 4 Disc diam.: 150 mm Weight: 6.7 kg Dimensions: 410 mm / 410 mm / 93 mm			
	Ø 407 mm	ASK3199940997	4 x Ø 150 mm	1	
	Tower/Spacer for Flexisand Sanding Disc	For increased stability during sanding with the Bona FlexiSand 1.9..			
ASK3199942979			1		



SANDING | MACHINES

FlexiSand System

Type

Article Number

Voltz/Hertz

Pcs/transport
package

Effect

Bona Quattro Disc



Four-plate disc for an excellent surface finish. Perfect for reducing and smoothing out drum marks and rotational scratches from edger machines. The Bona Quattro Disc will optimize your sanding results and is perfectly balanced for high efficiency combined with smooth end results.

Ø 407 mm

ASO312530

4 x Ø 150 mm

1

Bona MultiDisc



With its six-plate construction, the Bona MultiDisc creates an exceptionally smooth and flat surface finish. A tool perfect to use before staining or oiling wooden floors with pigmented oil.

Ø 125 mm

ASO312520

6 x Ø 125 mm

1

Replacement Pad Set



Replacement for broken or used pads for the Quattro Disc.

Ø 150 mm

ASO319934

Ø 150 mm

4

Ø 407 mm

ASO319936

6 x Ø 125 mm

6

Bona Pad Drive



The Bona Pad Drive is delivered with the FlexiSand 1.5. A multipurpose tool that can be used to drive different pads and abrasive materials for a large number of applications including oiling, cleaning, buffing and superficial sanding.

Ø 407 mm

ASO312501

6

LED lamp



Two powerful LED lamps for better visibility when working with the Bona FlexiSand 1.5.

ASO319000

1



SANDING | MACHINES

FlexiSand System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona PowerDrive Connect



Using a unique direction-free sanding and brushing technique, Bona PowerDrive Connect combines excellent performance with easy operation. Mounted on the Bona FlexiSand, it can remove thick layers of lacquer, replacing the need for conventional belt sanding. Its click-on mount enables you to switch between disc and brush within a minute. The drive plate is easy to manoeuvre in small, confined spaces and can be used regardless of the direction of the wood.

Key Benefits:

- Flexible - one drive plate for both sanding and brushing jobs.
- Reduces need for edge sanding. Only leaves a 3 cm strip against the wall.
- Delivers a fantastically fine and smooth sanding result
- Failsafe, no risk of drum marks and similar

Technical Data:

Compatible with: Bona FlexiSand 1.9
No. of discs: 4
Disc diam.: 150 mm

Ø 407 mm

ASK3199940996

4 x Ø 150 mm

1

Bona Sanding Disc



Intermediate disc for mounting velcro abrasive discs.

Ø 150 mm

ASK3199941010

1

4

Metal Brush



First step in a brushing sequence, for aggressive brushing.

Ø 150 mm

ASK3199941030

1

4

Tynex Brush



Second step in a brushing sequence, smooths the surface and removes scratches.

Ø 150 mm

ASK3199941020

1

4

Bona ErgoEdge



Bona ErgoEdge enables you to sand wider and closer than ever. Thanks to its 178 mm wide curved discs you can perform 90% of all edge sanding standing upright. The Bona ErgoEdge minimizes the hassle associated with edge sanders when sanding corners, stairs and behind radiators. Kit with 4 discs and distance wheel.

Ø 178 mm

ASK3199942977

1

4



SANDING | MACHINES

FlexiSand System	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Diamond Blades 	Bona Diamond Blades are the ideal choice for speeding up stripping of resilient floors.				
	Ø 150 mm	ASK4099941643	1	4	
Internal Spur Gear 	Gear ring for the Bona FlexiSand 1.9. Necessary if your FlexiSand 1.9 is not already equipped with this.				
	Ø 407 mm	ASK3199940082	1	1	
Bona Steel Plates set 	Designed to offer a true hard-plating option during the sanding process, combining the traditional hard-plating technique with newer multi-directional sanding.				
	Ø 150 mm	AX0003562	1	4	
Bona FlexiVacuum 	Bona FlexiVacuum is a part of Bona's Dust free sanding offer, for improved working environment. It is classified in Class M according to EN 60 335-2-69, ensuring that 99,9% of the particles are removed by the filters. Can be mounted on Bona FlexiSand.				
		ASK3199940901	1	1	
FlexiVacuum Filter Dust Bag 	Filter dust bag - M Class EN 60 335-2-69				
		ASO994011	1	5	



SANDING | MACHINES

FlexiSand System	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Concrete Disc 	Basic drive plate for fitting different types of sanding segments. Magnetic fixing for quick and easy change of segments.				
	Ø 407 mm	ASO312570		1	
Split Segment 	Removal of polyurethane, thin adhesive residues, paint.				
		ASO312582		1	
PCD Maxi Segment 	Removal of thick adhesive residues, epoxy and carpet foam.				
		ASO312581		1	
Diamond Segment 	Removing sinter layers, preparation of concrete surfaces.				
		ASO312571		5	



SANDING | MACHINES

Supraflex

Type

Article Number

Voltz/Hertz

Pcs/transport
package

Effect

Bona Supraflex



Bona Supraflex is the perfect sanding companion to the Bona PowerDrive Connect, helping you with those hard-to-reach areas. It supports all functions of the Bona PowerDrive Connect and can fit both sanding discs as well as brushes. M14 tool fixture – easy to change between sanding disc to brushes.

Key Benefits:

- Powerful 1400 W motor
- Stepless speed selection (600-2100 rpm)
- Low height - Easy to reach under staircases, toe kicks and radiators
- Dust cover allows connection to Bona DCS for dust free sanding
- Noise reduction through innovative planetary and angular gears

Technical Data:

Power: 1400 W 230 V – 50/60 Hz
Speed: 600-1200 rpm (stepless)
Tool fixture: M14
Disc diameter: 150 mm
Weight: 2,6 kg

Ø 150 mm	AMF100000	1	1	
----------	-----------	---	---	--

Cup Brush Metal M14



Cup Brush Metal for use together with Bona SupraFlex sander.

Ø 80 mm	ASF100100	1	1	
Ø 120 mm	ASF100200	1	1	

Cup Brush Nylon M14



Cup Brush Nylon for use together with Bona SupraFlex sander.

Ø 120 mm	ASF100300	1	1	
----------	-----------	---	---	--



SANDING | MACHINES

Buffing

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Buffer



Buffing machine for a wide range of applications including fine wood sanding, cutting back grain raise, cleaning etc. Its reliable and asymmetrically placed 1600W motor ensures steady and stable operation. Simple construction and easy to use with fully adjustable handle height and large transportation wheels. Comes without driving plate.

Technical Data:

Motor type: 1.6 kW, 1 phase, 230V/50Hz
Abrasive disc speed: 120 rpm
Total weight: 33 kg

Ø 407 mm	AMC739000B	220-240 V / 50 Hz	1	1.6kW
----------	------------	----------------------	---	-------

Bona Mini Buffer



Single-speed buffing machine for basic buffing and superficial sanding of finished surfaces. Smooth running and features an anti-vibration system for ease of use. The handle can be lowered for use under stairs and tables.

Technical Data:

Weight: 13 kg

Ø 300 mm	AMC718010	240 V / 50-60 Hz	1	290 W
----------	-----------	---------------------	---	-------

Extra Weight

Mount on machine for extra pressure.

5.7 kg	ASC3611478		1	
--------	------------	--	---	--

Drive Disc



Drive disc for Bona Mini Buffer.

Ø 300 mm	ASC718070		1	
----------	-----------	--	---	--



SANDING | MACHINES

Buffing	Type	Article Number	Voltz/Hertz	Pcs/transport package	Effect
Vacuum Sealing Ring		Dust skirt for Bona Buffer to prevent dust escape.			
		Ø 407 mm	ASC74765		1
Dust Bag – Paper		Disposable paper dust bag.			
			ASC25430		1
Dust Bag – Cloth		Reusable cloth filter bag.			
			ASC025435		1
Drive Disc		With grip hooks for driving pads.			
		Ø 407 mm	ASC742069		1
Sanding Disc		Sanding disc for attaching double-sided abrasive discs.			
		Ø 407 mm	ASC742077		1
Quattro Disc		Four-plate sanding disc for Bona Buffer.			
		Ø 407 mm	ASC742080	4 x Ø 150 mm	1



SANDING | MACHINES

Vacuum Cleaners		Article Number	Packaging	Pcs/transport package	Package/pallet
Bona S20 	A powerful, easy to manoeuvre vacuum cleaner with large a dust container. Can be connected to the Bona Buffer with a 4 m hose for effective dust removal during sanding.				
	Technical Data: Dust container: 10 L Hose length: 4 m Cable length: 10 m Weight: 10 kg				
	AMC020000	230 V / 50 Hz	1	1.1 kW	

Other	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Power Stripper 	Can be operated either by hand or as a floor stripper with extension handle. Easy operation by the use of a foot switch. Adjustable hand-grips for easy fit. For removing bonded floor coverings on foam, textile, parquet, semi-flexible tiles or PVC.				
	Technical Data: Working width: 210 mm Power: 2.0 kW Oscillations: 6500 U/min Weight: 12.8 kg Noise level: 85 dB (A)				
		AM43021000		1	

Fein MultiMaster saw blades AS44008003  AS44008009  AS44008010  AS44008014  AS44008015 		Saw blades and accessories for Fein MultiMaster.				
85 mm, cropped	AS44008009		2			
63 mm, with diamonds	AS44008010		2			
65 mm, E-cut precisions	AS44008014		2			
35 mm, E-cut	AS44008015		1			



SANDING | ABRASIVES

Superior — Ceramic Mix

Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Superior abrasive made of ceramic grits for easy removal of hard lacquers, carpet residue and for flattening highly uneven timber. Together with the smoother Bona 8300 Series, it creates an optimal system for high sanding performance combined with an excellent surface finish. The ceramic Aluminium oxide grits used on the abrasives are close to diamonds in hardness ensuring extremely long-lasting abrasives with maintained aggressiveness. Polyester cloth backing for outstanding strength and dimensional stability. Discs have Velcro backing for simple fitting of abrasives.

Key Benefits:

- Developed exclusively for wooden floors
- For heavy-duty sanding applications
- Superior durability
- Extreme aggression

Bona 8700 Belt




200 x 750 mm	Grit 36	AAS469500363	1	1
200 x 750 mm	Grit 50	AAS469500503	1	1
250 x 750 mm	Grit 36	AAS469600363	1	1
250 x 750 mm	Grit 50	AAS469600503	1	1

Bona 8700 Roll



203 mm x 10 m	Grit 36	AAS470700361	1	1
203 mm x 10 m	Grit 50	AAS470700501	1	1
254 mm x 10 m	Grit 36	AAS470800361	1	1
254 mm x 10 m	Grit 50	AAS470800501	1	1
305 mm x 10 m	Grit 36	AAS470900361	1	1
305 mm x 10 m	Grit 50	AAS470900501	1	1

Bona 8700 Ceramic Disc

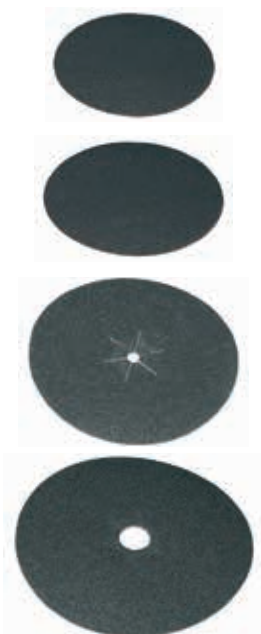

Ø 100 mm	Grit 36	AAS472800365	1	25
Ø 100 mm	Grit 50	AAS472800505	1	25
Ø 125 mm	Grit 36	AAS471600365	1	25
Ø 125 mm	Grit 50	AAS471600505	1	25
Ø 150 mm	Grit 36	AAS471700365	1	25
Ø 150 mm	Grit 50	AAS471700505	1	25
Ø 178 mm	Grit 36	AAS471800365	1	25
Ø 178 mm	Grit 50	AAS471800505	1	25



SANDING | ABRASIVES

Superior — Green Ceramic


Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Bona Green Ceramic Abrasives are comprised of a combination of ceramic and aluminum oxide grit materials, making them extremely aggressive, offering outstanding productivity. Compared to other competitive ceramic abrasives, Bona Green Ceramic Abrasives cut 30% faster and last up to 50% longer.

Key Benefits:

- Cuts 30% faster than any other competitive abrasive
- Lasts up to 50% longer than any other competitive ceramic abrasive

Bona Green Ceramic Sanding Belts




200 mm x 750 mm	Grit 36	AAS860700363	1	5
200 mm x 750 mm	Grit 50	AAS860700503	1	10
200 mm x 750 mm	Grit 60	AAS860700603	1	10
200 mm x 750 mm	Grit 80	AAS860700803	1	10
200 mm x 750 mm	Grit 100	AAS860701003	1	10
200 mm x 750 mm	Grit 120	AAS860701203	1	10
250 mm x 750 mm	Grit 36	AAS860800363	1	10
250 mm x 750 mm	Grit 60	AAS860800503	1	10
250 mm x 750 mm	Grit 80	AAS860800803	1	10
250 mm x 750 mm	Grit 100	AAS860801003	1	10
250 mm x 750 mm	Grit 120	AAS860801203	1	10

Bona Green Ceramic Edger Discs



Ø 150 mm	Grit 36	AAS860300365	1	25
Ø 150 mm	Grit 50	AAS860300506	1	25
Ø 150 mm	Grit 80	AAS860300806	1	50
Ø 150 mm	Grit 100	AAS860301006	1	50
Ø 150 mm	Grit 120	AAS860301206	1	50
Ø 178 mm	Grit 36	AAS860400365	1	25
Ø 178 mm	Grit 50	AAS860400506	1	25
Ø 178 mm	Grit 80	AAS860400806	1	25
Ø 178 mm	Grit 100	AAS860401006	1	25
Ø 178 mm	Grit 120	AAS860401206	1	25

Bona 8600 Green Ceramic Disc



Ø 150 mm	Grit 60	AAS860300606	1	25
Ø 178 mm	Grit 60	AAS860400606	1	25

THE SECRET BEHIND



BONA GREEN 8600 CERAMIC ABRASIVE

Unique composite for better sanding

Bona Green 8600 Ceramic Abrasives are long-lasting and tough in action, yet gentle to the wood with very low fibre ripping. The unique mixture of ceramic and aluminium oxide enables impressive performance.

It provides 30% faster abrasion and is 50% more long-lasting than other premium abrasives. With the introduction of the new Bona Green 8600 Ceramic Abrasive, a faster, smoother and safer sanding process will be your new standard.



SANDING | ABRASIVES

Premium – Zircon Mix	Dimension	Grit	Article Number	Packaging	Pcs/transport package
----------------------	-----------	------	----------------	-----------	-----------------------

Premium abrasive made of an optimal blend of zirconium and silicon carbide for a perfect balance between aggressiveness and surface finish. The Bona 8300 abrasives are of very high durability and have an antistatic coating which impedes clogging and ensures cooler and longer runtime as well as better dust extraction. The character of the grit material is such that new sharp points are created during use, ensuring maintained aggressiveness throughout its lifetime. Lasts up to five times longer than conventional Aluminiumoxide abrasives. Discs have Velcro backing for simple fitting of abrasives.

- Key Benefits:**
- Unique composition developed exclusively for wooden floors
 - Antistatic properties for minimized clogging and optimal dust extraction
 - Very high durability
 - High heat resistance

Bona 8300
Antistatic Belt



200 x 750 mm	Grit 24	AAS467700243	1	10
200 x 750 mm	Grit 36	AAS467700363	1	10
200 x 750 mm	Grit 40	AAS467700403	1	10
200 x 750 mm	Grit 60	AAS467700603	1	10
200 x 750 mm	Grit 80	AAS467700803	1	10
200 x 750 mm	Grit 100	AAS467701003	1	10
200 x 750 mm	Grit 120	AAS467701203	1	10
200 x 750 mm	Grit 150	AAS467701503	1	10
250 x 750 mm	Grit 24	AAS467800243	1	10
250 x 750 mm	Grit 36	AAS467800363	1	10
250 x 750 mm	Grit 40	AAS467800403	1	10
250 x 750 mm	Grit 60	AAS467800603	1	10
250 x 750 mm	Grit 80	AAS467800803	1	10
250 x 750 mm	Grit 100	AAS467801003	1	10
250 x 750 mm	Grit 120	AAS467801203	1	10

Bona 8300
Antistatic Sleeve



200 x 551 mm	Grit 24	AAS467600243	1	10
200 x 551 mm	Grit 36	AAS467600363	1	10
200 x 551 mm	Grit 40	AAS467600403	1	10
200 x 551 mm	Grit 60	AAS467600603	1	10
200 x 551 mm	Grit 80	AAS467600803	1	10
200 x 551 mm	Grit 100	AAS467601003	1	10
200 x 551 mm	Grit 120	AAS467601203	1	10



SANDING | ABRASIVES

Premium — Zircon Mix


Bona 8300
Antistatic Roll



Dimension	Grit	Article Number	Packaging	Pcs/transport package
203 mm x 25 m	Grit 24	AAS466300241	1	1
203 mm x 25 m	Grit 36	AAS466300361	1	1
203 mm x 25 m	Grit 40	AAS466300401	1	1
203 mm x 25 m	Grit 60	AAS466300601	1	1
203 mm x 25 m	Grit 80	AAS466300801	1	1
203 mm x 25 m	Grit 100	AAS466301001	1	1
203 mm x 25 m	Grit 120	AAS466301201	1	1
254 mm x 25 m	Grit 24	AAS466400241	1	1
254 mm x 25 m	Grit 36	AAS466400361	1	1
254 mm x 25 m	Grit 40	AAS466400401	1	1
254 mm x 25 m	Grit 60	AAS466400601	1	1
254 mm x 25 m	Grit 80	AAS466400801	1	1
254 mm x 25 m	Grit 100	AAS466401001	1	1
254 mm x 25 m	Grit 120	AAS466401201	1	1
254 mm x 25 m	Grit 220	AAS466402201	1	1

Bona around the world

THE LODGE BAR,
QUEENSTOWN, NEW ZEALAND

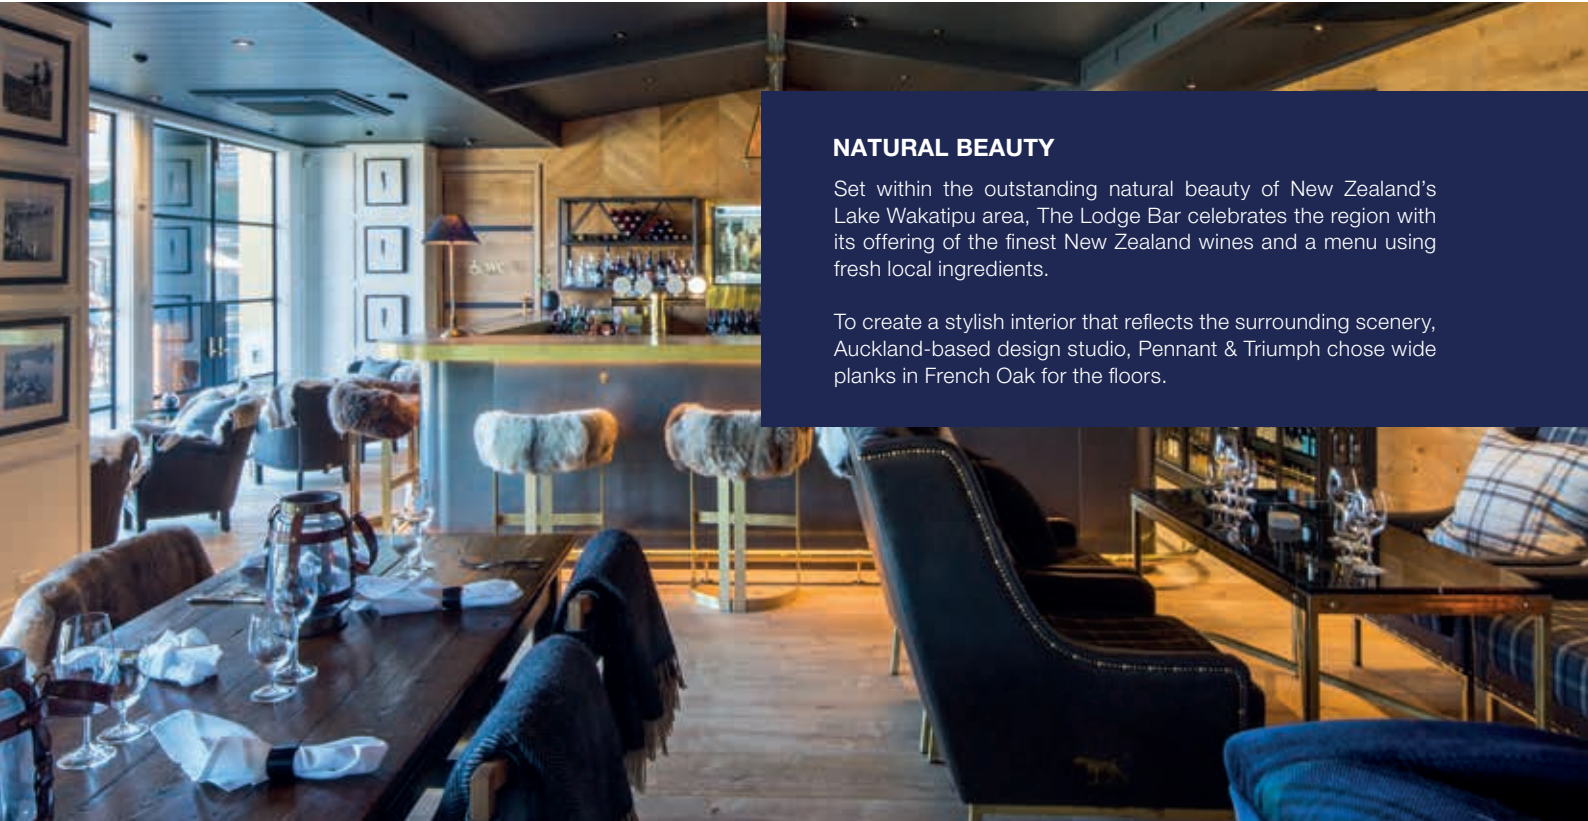

NATURAL BEAUTY

Set within the outstanding natural beauty of New Zealand's Lake Wakatipu area, The Lodge Bar celebrates the region with its offering of the finest New Zealand wines and a menu using fresh local ingredients.



To create a stylish interior that reflects the surrounding scenery, Auckland-based design studio, Pennant & Triumph chose wide planks in French Oak for the floors.



SANDING | ABRASIVES

Premium — Zircon Mix

Bona 8300
Antistatic Disc



Dimension	Grit	Article Number	Packaging	Pcs/transport package
Ø 100 mm	Grit 36	AAS472700365	1	25
Ø 100 mm	Grit 60	AAS472700606	1	50
Ø 100 mm	Grit 80	AAS472700806	1	50
Ø 100 mm	Grit 100	AAS472701006	1	50
Ø 100 mm	Grit 120	AAS472701206	1	50
Ø 125 mm	Grit 60	AAS471200606	1	50
Ø 125 mm	Grit 80	AAS471200806	1	50
Ø 125 mm	Grit 100	AAS471201006	1	50
Ø 125 mm	Grit 120	AAS471201206	1	50
Ø 150 mm	Grit 24	AAS467500245	1	25
Ø 150 mm	Grit 36	AAS467500365	1	25
Ø 150 mm	Grit 40	AAS467500406	1	50
Ø 150 mm	Grit 60	AAS467500606	1	50
Ø 150 mm	Grit 80	AAS467500806	1	50
Ø 150 mm	Grit 100	AAS467501006	1	50
Ø 150 mm	Grit 120	AAS467501206	1	50
Ø 150 mm	Grit 24	AAS470600245	1	25
Ø 150 mm	Grit 36	AAS470600365	1	25
Ø 150 mm	Grit 40	AAS470600406	1	50
Ø 150 mm	Grit 60	AAS470600606	1	50
Ø 150 mm	Grit 80	AAS470600806	1	50
Ø 150 mm	Grit 100	AAS470601006	1	50
Ø 150 mm	Grit 120	AAS470601206	1	50
Ø 178 mm	Grit 24	AAS467400245	1	25
Ø 178 mm	Grit 36	AAS467400365	1	25
Ø 178 mm	Grit 40	AAS467400406	1	50
Ø 178 mm	Grit 60	AAS467400606	1	50
Ø 178 mm	Grit 80	AAS467400806	1	50
Ø 178 mm	Grit 100	AAS467401006	1	50
Ø 178 mm	Grit 120	AAS467401206	1	50
Ø 200 mm	Grit 24	AAS471100245	1	25
Ø 200 mm	Grit 36	AAS471100365	1	25
Ø 200 mm	Grit 40	AAS471100406	1	50
Ø 200 mm	Grit 60	AAS471100606	1	50
Ø 200 mm	Grit 80	AAS471100806	1	50
Ø 200 mm	Grit 100	AAS471101006	1	50
Ø 200 mm	Grit 120	AAS471101206	1	50



SANDING | ABRASIVES

Stand. — Aluminium Oxide

Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Standard abrasive belts of Aluminium oxide which produces a very fine surface finish. Strong cotton backing for high durability and dimensional stability. Compared to conventional Aluminium oxide abrasives, the Bona 8500 Series stands out as a highly durable and good-value alternative.

Key Benefits:

- Exceptional surface finish
- Open coat for cooler sanding
- High durability

Bona 8500
Aluminium Oxide Belt



200 mm x 750 mm	Grit 16	AAS468000163	1	10
200 mm x 750 mm	Grit 24	AAS468000243	1	10
200 mm x 750 mm	Grit 36	AAS468000363	1	10
200 mm x 750 mm	Grit 40	AAS468000403	1	10
200 mm x 750 mm	Grit 50	AAS468000503	1	10
200 mm x 750 mm	Grit 60	AAS468000603	1	10
200 mm x 750 mm	Grit 80	AAS468000803	1	10
200 mm x 750 mm	Grit 100	AAS468001003	1	10
200 mm x 750 mm	Grit 120	AAS468001203	1	10
250 mm x 750 mm	Grit 16	AAS468200163		
250 mm x 750 mm	Grit 24	AAS468200243	1	10
250 mm x 750 mm	Grit 36	AAS468200363	1	10
250 mm x 750 mm	Grit 40	AAS468200403	1	10
250 mm x 750 mm	Grit 50	AAS468200503	1	10
250 mm x 750 mm	Grit 60	AAS468200603	1	10
250 mm x 750 mm	Grit 80	AAS468200803	1	10
250 mm x 750 mm	Grit 100	AAS468201003	1	10
250 mm x 750 mm	Grit 120	AAS468201203	1	10

Bona 8500
Aluminium Oxide Sleeve



200 mm x 551 mm	Grit 16	AAS467900163	1	10
200 mm x 551 mm	Grit 24	AAS467900243	1	10
200 mm x 551 mm	Grit 36	AAS467900363	1	10
200 mm x 551 mm	Grit 40	AAS467900403	1	10
200 mm x 551 mm	Grit 50	AAS467900503	1	10
200 mm x 551 mm	Grit 60	AAS467900603	1	10
200 mm x 551 mm	Grit 80	AAS467900803	1	10
200 mm x 551 mm	Grit 100	AAS467901003	1	10
200 mm x 551 mm	Grit 120	AAS467901203	1	10



SANDING | ABRASIVES

Stand. — Silicon Carbide


Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Standard abrasive of silicon carbide, also known as carborundum, a very hard mineral that creates new sharp points when worn ensuring maintained aggressiveness during its lifetime. This property and an open coat ensures cool running on high speed machines such as edge sanders.

Key Benefits:

- Maintained aggression when worn
- Open coat for cool sanding
- High durability

Bona 8100 Silicon
Carbide Disc



Ø 100 mm	Grit 36	AAS472600365	1	25
Ø 100 mm	Grit 60	AAS472600606	1	50
Ø 100 mm	Grit 80	AAS472600806	1	50
Ø 100 mm	Grit 100	AAS472601006	1	50
Ø 100 mm	Grit 120	AAS472601206	1	50
Ø 150 mm	Grit 16	AAS466900165	1	25
Ø 150 mm	Grit 24	AAS466900245	1	25
Ø 150 mm	Grit 36	AAS466900365	1	25
Ø 150 mm	Grit 40	AAS466900406	1	50
Ø 150 mm	Grit 50	AAS466900506	1	50
Ø 150 mm	Grit 60	AAS466900606	1	50
Ø 150 mm	Grit 80	AAS466900806	1	50
Ø 150 mm	Grit 100	AAS466901006	1	50
Ø 150 mm	Grit 120	AAS466901206	1	50
Ø 150 mm	Grit 150	AAS466901506	1	50
Ø 150 mm	Grit 36	AAS468400365	1	25
Ø 150 mm	Grit 40	AAS468400406	1	50
Ø 150 mm	Grit 50	AAS468400506	1	50
Ø 150 mm	Grit 60	AAS468400606	1	50
Ø 150 mm	Grit 80	AAS468400806	1	50
Ø 150 mm	Grit 100	AAS468401006	1	50
Ø 150 mm	Grit 120	AAS468401206	1	50
Ø 178 mm	Grit 16	AAS467100165	1	25
Ø 178 mm	Grit 24	AAS467100245	1	25
Ø 178 mm	Grit 36	AAS467100365	1	25
Ø 178 mm	Grit 40	AAS467100406	1	50
Ø 178 mm	Grit 50	AAS467100506	1	50
Ø 178 mm	Grit 60	AAS467100606	1	50
Ø 178 mm	Grit 80	AAS467100806	1	50
Ø 178 mm	Grit 100	AAS467101006	1	50
Ø 178 mm	Grit 120	AAS467101206	1	50



SANDING | ABRASIVES


Stand. — Silicon Carbide

Bona 8100
Silicone Carbide Disc



Dimension	Grit	Article Number	Packaging	Pcs/transport package
Ø 200 mm	Grit 16	AAS466600165	1	25
Ø 200 mm	Grit 24	AAS466600245	1	25
Ø 200 mm	Grit 36	AAS466600365	1	25
Ø 200 mm	Grit 40	AAS466600406	1	50
Ø 200 mm	Grit 50	AAS466600506	1	50
Ø 200 mm	Grit 60	AAS466600606	1	50
Ø 200 mm	Grit 80	AAS466600806	1	50
Ø 200 mm	Grit 100	AAS466601006	1	50
Ø 200 mm	Grit 120	AAS466601206	1	50
Ø 200 mm	Grit 150	AAS466601506	1	50

Bona 8100
Double-sided Disc



Ø 407 mm	Grit 16	AAS466800163	1	10
Ø 407 mm	Grit 24	AAS466800243	1	10
Ø 407 mm	Grit 36	AAS466800363	1	10
Ø 407 mm	Grit 40	AAS466800403	1	10
Ø 407 mm	Grit 60	AAS466800603	1	10
Ø 407 mm	Grit 80	AAS466800803	1	10
Ø 407 mm	Grit 100	AAS466801003	1	10
Ø 407 mm	Grit 120	AAS466801203	1	10



SANDING | ABRASIVES

Pads — Field fo use

Colour coding for
field of use

Smooth



Rough

White – backing for sanding screen. Can also be used for buffing polish.

Tan (beige) – for polishing

Red – for daily cleaning


Green – for periodic cleaning and oil maintenance

Brown – for oil application

Black – for heavy duty cleaning and polish stripping

Pads — Field fo use

Bona Superpad
407 mm



Thick pad for Bona FlexiSand 1.5 and Bona Buffer.

White	AAS867300058	Ø 407 mm x 25 mm	5
Tan	AAS867300038	Ø 407 mm x 25 mm	5
Red	AAS867300048	Ø 407 mm x 25 mm	5
Green	AAS867300028	Ø 407 mm x 25 mm	5
Brown	AAS867300068	Ø 407 mm x 25 mm	5
Black	AAS867300018	Ø 407 mm x 25 mm	5

Bona Superpad
280 mm



Pad for Bona Mini Buffer.

White	AA68041000	Ø 280 mm x 25 mm	5
Tan	AA68042000	Ø 280 mm x 25 mm	5
Red	AA68043000	Ø 280 mm x 25 mm	5

Bona Superpad
Incl. EAN code



Thick pad for Bona FlexiSand 1.5 and Bona Buffer.

White	AAS68011000	Ø 407 mm x 25 mm	5
Tan	AAS68012000	Ø 407 mm x 25 mm	5
Green	AAS68013000	Ø 407 mm x 25 mm	5
Black	AAS68014000	Ø 407 mm x 25 mm	5

Bona Pad 407 mm



Thin pad for Bona FlexiSand 1.5 and Bona Buffer.

White	AA68001000	Ø 407 mm x 8 mm	10
Tan	AA68002000	Ø 407 mm x 8 mm	10
Green	AA68003000	Ø 407 mm x 8 mm	10
Black	AA68004000	Ø 407 mm x 8 mm	10



SANDING | ABRASIVES

Pads — Field fo use		Type	Article Number	Packaging	Package/ pallet
Bona Superpad 200 mm 	Pad for Lägler Trio.				
	White	AA68053000	Ø 200 mm x 8 mm		
	Green	AA68054000	Ø 200 mm x 8 mm		
Bona Wool Pad 	Pad for Bona FlexiSand 1.5 and Bona Buffer. The pad is made of genuine sheep wool for application of oil and polishing of oiled or waxed floors. Wool produces higher heat towards the surface compared to synthetic pads, which improves the penetration of oil into the wood and accelerates the drying process. Contains natural lanolin (wool wax) for a satin finish. Highly recommended for Bona Oils.				
	Key Benefits:				
	• 100% wool pad				
		AA68071000	Ø 407 mm x 8 mm	8	
Microfibre Pad	Microfibre pad				
		ASC718906	Ø 300 mm	1	
Bona Fiber Pad	Premium Sanding Pad developed for aggressive cleaning and polish removal.				
		AA32153016	Ø 407 mm	1	
Bona Fiber Pad Velcro Backing	Fiber pad with velcro backing for aggressive cleaning and polish removal.				
		AA32153180	Ø 180 mm	1	
		AA32153150	Ø 150 mm	1	

Scrad Pads		Dimension	Grit	Article Number	Packaging	Pcs/transport package
Bona Scrad Pad 	Abrasive pad for Bona FlexiSand 1.5 and Bona Buffer. Used together with a Bona Scrad Wing it forms a unique abrasive system developed for cutting back grain raise between coats of finish. Minimizes scratches.					
	Ø 407 mm x 8 mm	Grit 320	AAS854303208		5	
	Ø 330 mm x 8 mm	Grit 320	AA970740		5	



SANDING | ABRASIVES

Scrad Pads	Dimension	Grit	Article Number	Packaging	Pcs/transport package
Bona Scrad Wing	Delta shaped abrasive with Velcro backing for use together with the Bona Scrad Pad. Attach 1–2 wings.				
	Delta	Grit 120	AAS468601206		50
	Delta	Grit 150	AAS468601506		50
	Delta	Grit 220	AAS468602206		50
Screens	Dimension	Grit	Article Number	Packaging	Pcs/transport package
Bona Sanding Screen, double-sided	Abrasive screen for surface preparation of wooden floors prior to coating and for cutting back grain raise after coating. High durability and low grit loss. Its open mesh structure impedes clogging and improves dust extraction.				
	Key Benefits:				
	• Non-Clogging				
	• Open mesh structure for improved dust extraction				
	• Double-Sided				
	Ø 407 mm	Grit 60	AAS867100603	1	10
	Ø 407 mm	Grit 80	AAS867100803	1	10
	Ø 407 mm	Grit 100	AAS867101003	1	10
	Ø 407 mm	Grit 120	AAS867101203	1	10
	Ø 407 mm	Grit 150	AAS867101503	1	10
	Ø 407 mm	Grit 180	AAS867101803	1	10
	Ø 407 mm	Grit 220	AAS867102203	1	10
	Ø 407 mm	Grit 60	AAS67012060	1	10
	Ø 407 mm	Grit 80	AAS67012080	1	10
	Ø 407 mm	Grit 100	AAS67012100	1	10
	Ø 407 mm	Grit 120	AAS67012120	1	10
	Ø 280 mm	Grit 80	AAS872000803	1	10
	Ø 280 mm	Grit 100	AAS872001003	1	10
	Ø 280 mm	Grit 120	AAS872001203	1	10
	Ø 200 mm	Grit 80	AAS903700808	1	30
	Ø 200 mm	Grit 100	AAS903701008	1	30
	Ø 200 mm	Grit 120	AAS903701208	1	30
	Ø 200 mm	Grit 150	AAS903701508	1	30



SANDING | ABRASIVES

Diamond Abrasives

Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Bona Diamond Abrasive Disc



Made using the hardest sanding agents in the world, Bona Diamond Abrasives are unique, delivering unparalleled sanding efficiency, durability and surface smoothness – whether sanding on bare wood or in preparation for recoating. Because the diamond grits are hard but not sharp, the result after fine sanding is a smooth, virtually scratch-free surface.

Bona Diamond Abrasives last up to 15 times longer than competing screen or multihole sanding discs and deliver consistent performance, even after 100 m2 of sanding. And thanks to its unmatched hardness, each disc maintains its sanding performance throughout its lifetime.

Key Benefits:

- Longer lasting
- Perfect evenness
- Better surface
- Safe recoating

Ø 150 mm	Grit 80	AAS472000808	1	8
Ø 150 mm	Grit 120	AAS472001208	1	8
Ø 125 mm	Grit 240	AAS471902408	1	12
Ø 150 mm	Grit 240	AAS472002408	1	8

Bona Intermediate Pad



A pressure-equalizing foam pad that has the ability to follow the contours of the surface.

Ø 125 mm		AAS472102408	1	3
Ø 150 mm		AAS472200008	1	4

Bona Cleaning Pad



Strong fibre-weave disc for picking up residual dust after sanding with diamond abrasives. Suitable cleaning method for smaller areas.

Ø 125 mm		AAS472300008	1	12
Ø 150 mm		AAS472400008	1	8

Abrasives - Delta

Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Delta Abrasive Paper



For Fein and Bosch.

82 x 82 x 82	Grit 40	AAS872100406	1	50
82 x 82 x 82	Grit 60	AAS872100606	1	50
82 x 82 x 82	Grit 80	AAS872100806	1	50



SANDING | ABRASIVES

Abrasives

Dimension	Grit	Article Number	Packaging	Pcs/transport package
-----------	------	----------------	-----------	-----------------------

Bona Net Ceramic



The Bona Net Ceramic is mainly intended to be used for orbital or rotary sanders, such as Supraflex SE 14-2 or similar. It can also be used attached to Bona PowerDrive for medium sanding or removal of joint filler.

Key Benefits:

- Minimal clogging
- Good dust extraction
- Very high removal rate
- Independent on machine hole system

Technical Data:

Grit type: Ceramic Aluminiumoxide
Grit range: 80
Size: 150 mm
Backing: Knitted fabric
Coating: Electrostatic
Bonding: Resin over resin

Ø 150 mm	Grit 80	AAS473200806	1	50
Ø 150 mm	Grit 100	AAS473201006	1	50
Ø 150 mm	Grit 120	AAS473201206	1	50
Ø 178 mm	Grit 80	AAS473400806	1	50
Ø 178 mm	Grit 100	AAS473401006	1	50
Ø 178 mm	Grit 120	AAS473401206	1	50

Bona Net Alox



The Bona Net Alox is mainly intended to be used for orbital or rotary sanders, such as Supraflex SE 14-2 or similar. It can also be used attached to Bona PowerDrive for fine and medium sanding.

Key Benefits:

- Minimal clogging
- Good dust extraction
- Very high removal rate
- Independent on machine hole system

Technical Data:


Grit type: White Aluminiumoxide
Grit range: 80, 100 and 120
Size: 150 mm
Backing: Knitted fabric
Coating: Electrostatic
Bonding: Resin over resin

Ø 150 mm	Grit 80	AAS473300806	1	50
Ø 150 mm	Grit 100	AAS473301006	1	50
Ø 150 mm	Grit 120	AAS473301206	1	50
Ø 178 mm	Grit 80	AAS473500806	1	50
Ø 178 mm	Grit 100	AAS473501006	1	50
Ø 178 mm	Grit 120	AAS473501206	1	50

COATINGS



Whether you're aiming for high shine, rich colour, slip resistance or durability, Bona has the ideal surface treatment for all types of floors. Since the 1970s, we have been the world's pioneer in waterborne finishes, providing low-VOC, solvent-free solutions for every wood flooring need. Bona continues to drive the development of waterborne lacquers with our latest addition, Bona Domo, developed to help and simplify the contractor's work process, making it a reliable partner for everyday use. On the following pages, you will discover all the surface treatments you need to create beautiful, durable and easy-to-manage floors.

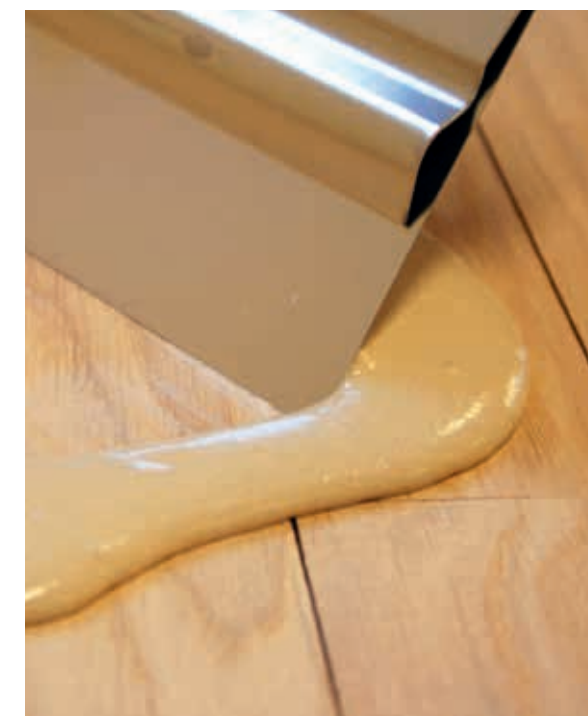

1. Primers
2. Lacquers
3. SuperSport System
4. Oils - Wear Treatment
5. Oils - Outdoor
6. Oils - Effect Treatment
7. Fillers & Repair
8. Resilient System
9. Resilient Maintenance





Primers

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona White



Primer producing a white tint look where the intensity can be controlled by applying it in one or more layers. Applied in a single layer it typically preserves the impression of raw, untreated wood. For a truly white impression, apply two or more layers. Its highly forgiving formula is designed for easy roller application.

Key Benefits:

- White tint look
- Impedes wood yellowing
- Easy roller application

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Applications: 1–3
Application tools: Bona Roller
Coverage: 10–12 m²/L

WB250613001

1 L

10

50

WB250620001

5 L

3

44

Bona Natural



Bona Natural Primer is designed to preserve/create the natural appearance of unfinished wood. Overcoat with Bona Traffic Natural lacquer for a truly 'unfinished' look, combined with a highly durable surface. It is quick drying and with good abrasion qualities.

Key Benefits:

- Retains the look of pure wood
- Easy roller application
- Good abrasion qualities

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application: 1-2
Tools: Bona Roller
Coverage: 8–10 m²/L

WB251613001

1 L

12

50

WB251620001

5 L

3

44

Bona Classic



Provides a well-bodied surface. It creates a soft, flexible film that reduces the potential effects of side bonding and its forgiving application properties make it suitable for practically all types of wood. Bona Classic is non-yellowing.

Key Benefits:

- Light colouration
- All types of wood
- Reduces side-bonding effects
- Easy roller application

Technical Data:

Base: Acrylate
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L

WB200013003

1 L

10

50

WB200020012

5 L

3

44



Primers

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Intense



Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable on practically all types of wood and especially on tropical wood.

Key Benefits:

- Medium colouration
- All wood, tropical wood
- First choice for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Applications: 1
Application tools: Bona Roller
Coverage: 8–10 m²/L

WB250020001

5 L

3

44

Bona Amber



Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or moving floors such as end grain or plank floors. Suitable for oak and darker types of wood including tropical species.

Key Benefits:

- Rich colouration
- Oak, dark, tropical wood
- Good for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L

WB255020001

5 L

3

44

Bona Quick



A high viscous primer with a gel-like consistency. Use as a first layer on untreated wood, without following abrasion. Use between coats of finish, to reduce abrasion scratches and fill small irregularities for a flawless end-finish.

Key Benefits:

- Very light colouration
- Quick drying gel
- Reduces scratches
- First layer and/or in-between
- Easy trowel application

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 20–30 min between coats
Applications: 1–3
Application tools: Stainless steel trowel
Coverage: 25–35 m²/L and application

WB074002002

5 L

1



Lacquers

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Traffic HD

The world's toughest and fastest drying finish for wooden floors exposed to extreme wear. You can walk on it after just 12 hours. Used in hotels, restaurants and airports worldwide, where short downtime is essential. Waterbased and very low VOC and odour. Non-yellowing.



Key Benefits:

- The ultimate choice
- Superior protection for commercial and public areas
- Extra fast, allows full traffic after just 12 hours
- Very low VOC and odour

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L and application

- Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)
- EN 71:3 compliant

Silk Matt	WT155346001	4.95 L	3	36
Matt	WT155646001	4.95 L	3	36
Extra Matt	WT155946001	4.95 L	3	36
Hardener	WH330045001	4.95 L	3	

Bona Traffic HD
Anti Slip

Adds the highest standard of friction in areas where it's needed the most – like stairs, nurseries and kitchens. Superb performance against wet spills.



Key Benefits:

- Increases protection from accidental slips (R9)
- Ready to use, no mixing required, safe results
- Very low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/lit and application

WT153946001	4.95 L	3	36
-------------	--------	---	----

Bona Traffic

The classic since 1998, with super durability for any area where high wear resistance is needed. Easy to maintain and non-yellowing. Good for both untreated wood and prefinished parquet.



Key Benefits:

- Superior protection for commercial and public areas
- Natural appearance
- Low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 3–4 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L and application

- Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)
- EN 71:3 Compliant

WT153946001	4.95 L	3	36
-------------	--------	---	----



Lacquers

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Traffic Natural

For very busy areas where a natural wood look is desired, with superior protection from the unique Traffic formula. Waterborne, easy to maintain and non-yellowing.



Key Benefits:

- Superior protection for commercial and public areas
- Look and feel of pure wood
- High slip resistance (R9)
- Very low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 3–4 h between coats
Application tools: Bona Roller (AT3100100)
Coverage: 8–10 m²/lit and application

WT190646001	4.5 L	3	36
-------------	-------	---	----

Bona Mega ONE

Bona Mega ONE focuses on simplifying the craftsman's working day for quicker and easier jobs with great reliability. It brings out a nice, warm wood colouration while establishing a long-lasting protection for wooden floors in domestic and medium wear commercial environments. Clear, non-yellowing formula.



Key Benefits:

- High build characteristics
- Reduced drying time
- Excellent sanding properties
- Non-yellowing

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 8–10 m²/L and application

Silk Matt	WT300320001	5 L	3	44
Matt	WT300620001	5 L	3	44
Extra Matt	WT300920001	5 L	3	44
Silk Matt	WT300313012	1 L	12	50
Matt	WT300613012	1 L	12	50
Extra Matt	WT300913012	1 L	12	50



Lacquers

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Mega



For offices, small shops, hotel rooms and as a premium choice for homes. Innovative, waterborne, one-component formula, that reacts with oxygen and performs like a two-component. No mixing required, use straight from the bottle. Also very good for plank floors and for floors with underfloor heating.

Key Benefits:

- Superior protection for commercial areas
- 1-component with 2-component performance
- Very good for underfloor heating*
- Very low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L and application

- Meets DIN 18032:2 for slip resistance gloss, silk matt & matt)
- EN 71:3 Compliant

Gloss	WT133013002	1 L	10	50
Gloss	WT133020002	5 L	3	44
Silk Matt	WT133313002	1 L	10	50
Silk Matt	WT133320002	5 L	3	44
Matt	WT133613001	1 L	10	50
Matt	WT133620001	5 L	3	44
Extra Matt	WT133920001	5 L	3	44

Bona Mega Natural



For homes and other spaces where a natural wood look is desired. Waterborne, 1-component formula. Easy to maintain surface.

Key Benefits:

- Superior protection for residential areas
- Look and feel of pure wood
- Very low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 2-3 h between coats
Application tools: Bona Roller (AT3100100)
Coverage: 8-10 m²/lit and application

WT180646001	4.5 L	3	44
-------------	-------	---	----

Bona Domo



Bona Domo is a member of the Bona family of premium finishes. With good build and a quick drying formula, it protects the wooden floor in no time. Bona Domo can be used from start to finish, both as a base- and topcoat and is easy to abrade.

Key Benefits:

- Good build
- Forgiving/easy application
- Easy to abrade
- Non-yellowing formula
- Primer and topcoat in one

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1-2 h between coats
Application tools: Bona Roller

Silk Matt	WT220320001	5 L	3	
Matt	WT220620001	5 L	3	



Lacquers

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Novia



One-component and waterborne, Bona Novia provides superior protection for floors with normal domestic wear. Can be used with or without primer. Produces an even and warm colour and is non-yellowing. Also very good for cork floors.

Key Benefits:

- Superior protection for domestic areas
- Good resistance to typical household chemicals
- Very low VOC

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/L and application

- EN 71:3 Compliant

Gloss	WT230020001	5 L	3	44
Silk Matt	WT230313001	1 L	10	50
Silk Matt	WT230320001	5 L	3	44
Silk Matt	WT230324001	10 L	2	24
Matt	WT230613001	1 L	10	50
Matt	WT230620001	5 L	3	44
Matt	WT230624001	10 L	2	24

Bona Retarder



Bona Retarder is an additive that improves the levelling and prolongs the open time of Bona waterborne finishes, for both primers and topcoats. It is designed to be used when the indoor humidity is low and/or the temperature of the room is higher than normal. Using Bona Retarder will reduce the risk of the finish drying too quickly and leaving roller marks in the dried coat.

Key Benefits:

- Extends open time
- Facilitates application in dry and/or warm climate conditions
- Reduces risk of lap marks

WX100006001	0.2 L	12	120
-------------	-------	----	-----

Bona Blocker

Additive for reducing bleeding from wood extracts, particularly from softwood knots. Reduces the risk of stains developing on top of the knots. One bottle is enough for two buckets (2x5L) of Bona Decor Paint.

Key Benefits:

- Reduces yellowing from wood knots

Technical Data:

Mixing Ratio: 20:1 (4,8%)
Volume: 0,5L, enough for 2x5 L of paint

WH341009001	500 mL	15	
-------------	--------	----	--



SuperSport System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona SuperSport Primer

Primer made especially for handling the flexing and movement of wooden sports floors. Provides excellent adhesion to wood and is easy to apply on large surfaces thanks to excellent levelling properties and long open time. Suitable on practically all types of wood.

**Key Benefits:**

- No stretched finish or “white lines”
- Excellent abrasion properties
- Extended open time

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 2–3 h between coats
Application: Bona Roller
Coverage: 8–10 m²/L and application

WB251024001

10 L

2

24

Bona SuperSport HD

Finish made especially for handling the flexing and movement of wooden sports floors. Excellent levelling properties and long open time make it easy to apply on large surfaces. Approved to both of the leading standards for indoor sports floors (EN 14904:2006 & DIN 18032:2).

**Key Benefits:**

- High resistance to wear and scuffing
- Perfectly balanced friction
- Easy to maintain

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application: Bona Roller
Coverage: 8–10 m²/L and application
• Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)

Gloss

WT137020001

5 L

3

24

Matt

WT137620001

5 L

3

24

Bona SuperSport ONE

One-component sport lacquer with oxygen crosslinking technology for durability and appearance. Premium, waterborne wood floor finish specifically formulated for professional use on wood sport floors. Provides a tough, polyurethane finish with good build. Compliant with the European standard for indoor sports surfaces for safe play.

**Key Benefits:**

- High resistance to wear and scuff marks
- Classified EC1 for low indoor air emissions
- Recommended by FIBA for highest level of competition

Technical Data:

Base: Oil-modified polyurethane
Category: Waterborne 1-comp
Drying time: Full hardness after 5 days
Application: Bona Polyester Roller
Application rate: 8-10 m²/litre

Gloss

WT138024001

10 L

3

24

Matt

WT138624001

10 L

3

24



SuperSport System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona SuperSport Line Paint



Bona SuperSport Line Paint is a specialized line and court marking paint for use on finished wooden sport floors. Can be used to paint line markings but also complete court borders and zones. Available in eight mixable vibrant colours to achieve an endless array of shades.

Key Benefits:

- Quick drying
- Requires no abrasion before overcoating
- Superb opacity (hiding ability)

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1–4 between coats
Application: Fine brush or short-haired roller
Coverage: 6–10 m²/lit or 120–200 m of line-marking

	Yellow	EC801413002	1 L	2	36
	Red	EC801913001	1 L	2	36
	Orange	EC801613001	1 L	2	36
	Light Blue	EC801713001	1 L	2	36
	Dark Blue	EC801413001	1 L	2	36
	Violet	EC801634002	1 L	2	36
	Light Green	EC801313001	1 L	2	36
	Dark Green	EC801513002	1 L	2	36
	Black	EC801113001	1 L	2	36
	White	EC801113002	1 L	2	36

Bona SuperSport Cleaner



Concentrated slightly alkaline detergent specifically designed for frequent cleaning of indoor sports surfaces. Bona SuperSport Cleaner is gentle on the surface yet will effectively remove grease and grime, leaving no slippery or greasy film. Low foaming formula, suitable for autoscrubber as well as manual application.

Key Benefits:

- Safe on wood
- Low emission
- Leaves no slippery residue

Technical Data:

Dilution: 1:100 for general use

WM763020001

5 L

3

44

Bona SuperSport Deep Clean



Designed for occasional cleaning of indoor sports floors to remove black heel marks, handball glue as well as build-up of body fats and other contaminants that may make the surface slippery.

Key Benefits:

- Degreases floor and restores friction
- Removes syntetic materials from shoe soles
- Removes certain types of handball glue

Technical Data:

Dilution: 1:5

ML1

WM636020001

5 L

3

44

ML2

WM636020002

5 L

3

44



BONA OIL SYSTEM

– UNIQUE CHARACTERS ON WOODEN FLOORS

Fulfill that unique floor vision of yours. Empowered with a passion for wooden floors and 100 years of innovative solutions, Bona Oil System inspires and supports you, from vision to reality. A full range of oils based on renewable ingredients.

Whether you are to design, craft or care, break the ordinary with Bona – for durable beautiful floors with unique character.



COATINGS | WOOD

Oils – Wear Treatment	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
-----------------------	------	----------------	-----------	-----------------------	----------------



Bona Craft Oil



Professional wood oil with excellent saturation properties offering deep protection against wear, chemicals and moisture. Due to its high oil content and outstanding penetration properties only a single application is typically required, making surface treatment a simple and fast job. Equally suitable in homes and public environments. Safe for application on children’s toys (EN 71-3). Available in neutral and five coloured versions.

Key Benefits:		Technical Data:		
- Extremely high degree of saturation for fast surface treatment - Enhances the grain and colour of the wood - Low in odour and in solvents (<4%) - Open, breathing surface		Base: Modified vegetable oils Category: Hardening oil, 1-comp Solids content: 96–98% Drying time (until use): 24 h Application: Rubber applicator, Bona Wool pad or stainless steel trowel Coverage: 20 m²/L		

Pure	GT560115001	2.5 L	4	
Pure	GT560120001	5 L	2	
Pure	GT560113001	1 L	6	
Frost	GT561115001	2.5 L	4	
Frost	GT561113001	1 L	6	

Bona Craft Oil 2K



Performance, versatility and design – get the charming look and feel of an oiled floor, plus the protection of a finish. Bona Craft Oil 2K’s unique formula, made from modified plant based oil, exhibits accelerated drying time and strengthened wear resistance. Works perfectly with a wide variety of wood species including otherwise problematic ones such as jabot, cherry, walnut and more. It delivers a beautiful and strong water- and stain-resistant surface and is ready for light use in just 8 hours.

Key Benefits:		Technical Data:		
- High performance plant-based oil - Protects in 1 coat - Long open-time, quick cure - Overcoatable with Bona Traffic, Bona Traffic HD and Traffic Natural		Base: Modified vegetable oils incl. isocyanate hardener Category: Hardening oil, 2-comp Solids content: 96-98% Drying time (until use): 12 h Application tools: Rubber applicator, short-haired roller or stainless steel trowel Coverage: 20 m²/L		

Neutral	GT570014001	1.25 L	6	
Frost	GT571114001	1.25 L	6	
Clay	GT572114001	1.25 L	6	
Graphite	GT573114001	1.25 L	6	
Ash	GT574114001	1.25 L	6	
Umбра	GT575114001	1.25 L	6	
Light Grey	GT576114011	1.25 L	6	
Invisible	GT580014011	1.25 L	6	
Sand	GT579114011	1.25 L	6	



COATINGS | WOOD

Oils – Wear Treatment

Bona Hard Wax Oil



Natural oil, modified for superior protection of wooden floors. Produces the warm look of an oiled floor while establishing a hardwearing and stain resistant surface that is spot-repairable and easy to maintain. Unique composition formulated without questionable substances such as cobalt and ketoximes. Very low in odour and easy to handle, being applicable with roller, brush and trowel. Leaves an open, breathing surface that reduces the risk of side-bonding. Highly suitable for floors with underfloor heating. Combines perfectly with Bona Craft Oil for colouring and changing the design of wooden floors.

Key Benefits:

- Tough and dirt repellent
- Excellent water resistance
- Warm colour and natural look
- Very low in odour
- Free from cobalt and ketoximes (2-butoxime, butoxime, MEKO)

Technical Data:

Base: Modified vegetable oils
Category: Hardening oil, 1-comp
Solids content: 96–98%
Drying time (until use): 24 h
Application: Rubber applicator, Bona Woolpad or stainless steel trowel
Coverage: 20 m²/L

Silk Matt	AF3100013	1 L	6	
Silk Matt	AF3100025	2,5 L	2	
Silk Matt	AF3102010	10 L	1	
Matt	AF3600013	1 L	6	
Matt	AF3600025	2,5 L	2	
Matt	AF3602010	10 L	1	
Extra Matt	AF390013001	1 L	6	
Extra Matt	AF390015001	2,5 L	2	
Extra Matt	AF390024001	10 L	1	

Oils – Outdoor

Bona Decking Oil



Bona Decking Oil is a concentrated blend of vegetable oils, modified for superior impregnation and the long-lasting protection of decking and other exterior woodwork. It enhances the natural wood grain while protecting against moisture ingress, thus reducing the potential of wood cracking and warping.

Key Benefits:

- Long-lasting protection
- Contains UV protection
- Excellent water repellence

Technical Data:

Base: Modified vegetable oils
Category: Hardening oil, 1-comp
Drying time (until use): 24 h
Application: Wide brush or mohair roller
Coverage: Approx. 20 m²/L

Neutral	GT551115001	2.5 L	4	
Neutral	GT551124001	10 L	2	
Mahogany	GT551215001	2.5 L	4	
Teak	GT551315001	2.5 L	4	
Grey	GT551515001	2.5 L	4	



COATINGS | WOOD

Oils - Effect Treatment

Bona Mix Colour



Bona Mix Colour is a concentrated pigment paste for waterborne systems and specifically for Bona Nordic Tone and Bona Rich Tone. Added to either of these products it can intensify or change the colour of the Bona Tone to create a special effect.

Technical Data:

Content: Concentrated pigment paste
Consumption: 250 ml for one 5 L bottle (5%) of Bona Nordic Tone or Bona Rich Tone.

Mahogany	GX504007	0.25 L	12	
Walnut	GX504107	0.25 L	12	
White	GX504207	0.25 L	12	
Grey	GX504307	0.25 L	12	
Black	GX504407	0.25 L	12	

Bona Nordic Tone



Bona Nordic Tone is a pre-treatment to Bona Craft Oil for creating the unique character of a Scandinavian white washed floor. Combine with Bona Craft Oil Frost or choose a contrasting colour for an exciting 2-dimensional effect. The colour can be changed or further intensified by adding 5% of Bona Mix Colour to the Tone.

Key Benefits:

- Light, white washed effect
- Inhibits wood yellowing
- Whiteness can be controlled by number of applications (normally only one application is necessary)

Technical Data:

Base: Emulsified oils and waxes, pigmentation
Category: Pre-treatment, 1-comp
Drying time: 1–2 h (between applications)
Application: Oil application sleeve or wide floor brush
Coverage: 8–10 m²/L and application

	WX700020001	5 L	3	44
--	-------------	-----	---	----

Bona Rich Tone



Bona Rich Tone is a pre-treatment for hardwoods, bringing out a dark, smoky wood colour*, and giving the floor a touch of sophistication. Continue with a layer of Bona Craft Oil in any colour, for an exciting 2-dimensional effect or apply Bona Hard Wax Oil directly for an elegant finish. The colour can be changed or further intensified by adding 5% of Bona Mix Colour.

*the colour is achieved by a chemical reaction to wood and results may vary between wood species. Oak in particular reveals a deep, dark colouration after treatment.

Key Benefits:

- Dark, smoky effect
- Quick drying
- Odourless

Technical Data:

Base: Alkaline solution
Category: Pre-treatment, 1-comp
Drying time: 1–2 h (between applications)
Application: Oil application sleeve
Coverage: 8–10 m²/L and application

	WX900020001	5 L	3	44
--	-------------	-----	---	----



COATINGS | WOOD

Fillers & Repair

Bona Mix&Fill Plus



Time-saving gap filler with exceptional filling ability (up to 3 mm) often only requiring a single application to achieve a smooth surface. The filler is mixed with wood dust from the actual floor to be treated, producing a natural colouration that blends in with the rest of the floor. Suitable for light to medium coloured wood species.

Key Benefits:

- Exceptional filling ability
- Quick drying
- Anti-corrosive

Technical Data:

Base: Acrylate
Category: Waterborne 1-comp
Drying time (until sanding): 30–60 min
Application: Stainless steel trowel
Coverage: 8–12 m²/L

WF220020001	5 L	3	44
-------------	-----	---	----

Bona Mix&Fill



Gap filler for gaps up to 2 mm wide, suitable for practically all types of wood. The filler is mixed with wood dust from the actual floor to be treated producing a natural colouration that blends in with the rest of the floor.

WF21001302	1 L	10	50
WF21002002	5 L	3	44

Bona PU Filler



2-part polyurethane filler and adhesive. Developed for quick and durable repair of resilient floorings such as PVC/LVT, Rubber and Linoleum, with great adhesion to many materials.

Key Benefits:

- Super quick hardening
- Excellent adhesion properties
- High durability

Technical Data:

Color: Light Grey
Open Time: 3,5 min
Drying time: 30 min

ES600003250	250 ml	12	
Green Mixer Tips ES500000110	10	10	



COATINGS | RESILIENT

Resilient System

Bona LinoPrime



Quick drying PUR-based primer for pore filling of deep cleaned and sanded linoleum floors. Improves levelling and smoothness of the following coat, which typically can be applied already after 1 hour.

Key Benefits:

- Fills pores and reduces absorbency
- Ultra-quick drying
- Essential for linoleum

Technical Data:

Category: Waterborne 2-comp
Drying time: 1-2 h between coats
Application tools: Bona Roller (5 or 11 mm)
Coverage: 8–10 m²/L and application

	EB400620001	5 L	3	36
Hardener	EH390002001	0.2 L	3	

Bona Pure



It serves as a long-term surface protection for heavily trafficked industrial and commercial areas, restoring appearance and simplifying routine maintenance. Bona Pure consists of a waterborne, clear, non-yellowing formula.

Key Benefits:

- Hardwearing PUR protection for resilient floors
- Ultra-quick drying for minimal downtime.
- Optimal application and levelling properties
- Low slip potential and slip resistance compliant to indoor sports surface

Technical Data:

Category: Waterborne 2-comp
Drying time: 2-4 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 8–10 m²/L and application

Extra Matt	ES200620001	5 L	3	36
Matt	ES201620003	5 L	3	36
Hardener	ES205045001	0.5 L	3	

Bona SuperSport Pure HD



Bona SuperSport Pure HD is a hard-elastic and hardwearing PUR coating for the treatment of resilient floor coverings in sport halls.

Key Benefits:

- Tough PUR protection for resilient sport floors
- Rapid drying for minimal downtime. Back on the floor in 12 hours*
- Optimal application and levelling properties
- Compliant to EN 14904:2006 (Indoor Sport Surfaces)

Technical Data:

Category: Waterborne 2-comp
Drying time: 2-4 h between coats
Application tools: Bona Polyester Roller
Coverage: 8–10 m²/L and application

	ES201620005	5 L	3	36
--	-------------	-----	---	----



COATINGS | RESILIENT

Resilient System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Pure Colour

Bona Pure Colour ensures a quick application process with accelerated drying properties and being heavily pigmented for coverage in a single coat. Bona Pure Colour is available in eight popular standard colours but can also be ordered in the full spectrum of the RAL and NCS colour palette.

Key Benefits:

- Heavily pigmented for excellent hide
- Ultra-quick drying for minimal downtime
- Available in eight popular standard colours

Technical Data:

Category: Waterborne 2-comp

Drying time: 1-2 h between coats

Application tools: Bona Roller
(5 or 11 mm)

Coverage: 8–10 m²/L and application

RAL 5007	EC803620001	5 L	1	
RAL 5014	EC801620001	5 L	1	
RAL 7012	EC802620001	5 L	1	
RAL 6034	EC804620001	5 L	1	
RAL 7038	EC811720001	5 L	1	
RAL 7047	EC812720001	5 L	1	
RAL 1001	EC813720001	5 L	1	
RAL 1015	EC814720001	5 L	1	
Custom	EC800020001	5 L	1	
RAL 5012	EC805620001	5 L	1	
RAL 7012	EC802613001	1 L	1	
RAL 5007	EC803613001	1 L	1	
RAL 6034	EC804613001	1 L	1	
RAL 7038	EC811713001	1 L	1	
RAL 7047	EC812713001	1 L	1	
RAL 1001	EC813713001	1 L	1	
RAL 1015	EC814713001	1 L	1	
Custom	EC800013001	1 L	1	

Bona R Creative Chips



Acrylate-based plastic chips for a livelier impression. Used in combination with Bona Pure Colour.

Salt & Pepper	ES200013501	1 kg	1	
Black & White	ES200013502	1 kg	1	
Terra-mix	ES200013503	1 kg	1	



COATINGS | RESILIENT

Resilient – Maintenance

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona PowerRemove R



Aggressive cleaning agent developed for stripping polish, dirt and old cleaning residue from resilient floor coverings such as PVC, Linoleum, LVT, or Elastomer. Quick and efficient. Prior to using Bona PowerRemove we recommend to trial whether Bona Remove R can suffice.

Key Benefits:

- For quick removal of old maintenance coatings and contaminants
- Very high degree of efficiency
- Reduced pH prevents alkaline staining

Technical Data:

pH-value: approx. 9 (conc.)

Dilution: 1:1 – 1:5

EM703020001	5 L	3	44
-------------	-----	---	----

Bona Remove R



Detergent based on vegetable oil for frequent cleaning and maintenance of oiled wooden floors. Bona soap nourishes the surface and leaves a thin film that can be buffed for increased shine.

Key Benefits:

- Gentle on oiled surfaces
- Cleans and conditions
- Long lasting concentrate

Technical Data:


pH-value: Approx. 9

Dilution: 1:50

EM702020001	5 L	3	44
-------------	-----	---	----

Bona around the world

SPORTS FLOOR, BALATONFÖLDVÁR SCHOOL, HUNGARY

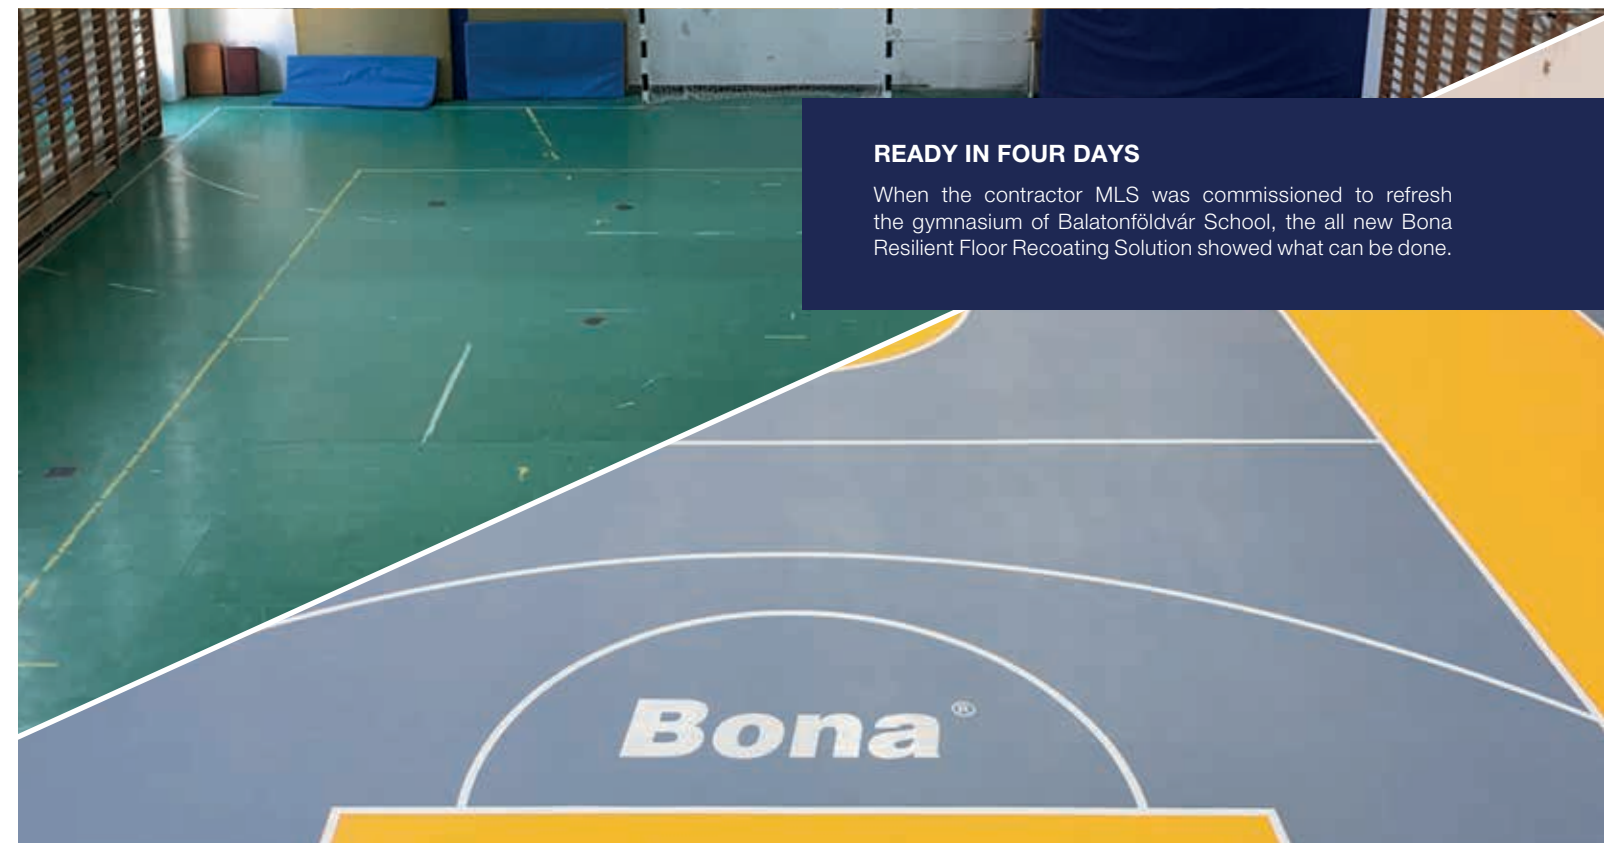

READY IN FOUR DAYS

When the contractor MLS was commissioned to refresh the gymnasium of Balatonföldvár School, the all new Bona Resilient Floor Recoating Solution showed what can be done.

FLOOR CARE



Proper maintenance is vital when it comes to retaining the long-lasting beauty of floors. Bona's floor care solutions are specially developed for cleaning and revitalizing your floors. Suitable for all wooden and resilient surfaces, with Bona's unique revitalizing solution floor owners can bring back the original lustre of their floors instantly, with a unique system that effectively removes the toughest dirt and scuff marks. Read more about Bona Commercial System and other best-in-class floor care solutions for both professional users and private homeowners in the following pages.



1. Deep Clean System
2. Lacquer – Maintenance
3. Oils – Maintenance





FLOOR CARE

Deep Clean System

Bona PowerScrubber 2.0



The Bona Power Scrubber is a versatile and powerful scrubbing machine for cleaning of most indoor floor surfaces as well as outdoor wood deckings. Bona PowerScrubber 2.0 enables the most effective deep-down cleaning, combined with unrivalled versatility and ease. Counter-rotating roller brushes provide deep, effective cleaning while the powerful, yet compact design of Bona PowerScrubber 2.0 delivers even more performance than most auto scrubbers, as well as the benefits of ergonomic operation, set-up and transportation. Recommended detergents: Bona Deep Clean Solution and Bona Remove R.

Key Benefits:

- Effective deep clean
- Wide range of surfaces
- Ergonomic design and operation
- Easy to fill, assemble and transport
- Indoor and outdoor use

Technical Data:

Motor rating: Max 2700 W, Avg. 1900 W
Power supply: 230 V / 50 Hz
Machine weight: 34.5 kg
Scrubbing brush: 2 x 400 mm soft white nylon
Solution capacity: 10 L
Recovery tank capacity: 10 L
Dimensions: 520 mm x 470 mm x 300 mm

AM400201100

1

Roller Brush



White – For oiled or lacquered floors.
Orange – For profiled deckings.
Red – For oiled and hard wax oiled floors.

Green – Lightly abrasive roller for aggressive cleaning of oiled floors.
Black – Stone and Tiles.

White	AS3647622500	400 mm	1	
Orange	AS3647625250	400 mm	1	
Red	AS3647624580	400 mm	1	
Green	AS3647622520	400 mm	1	
Black	AS3647624810	400 mm	1	

Suction bar



Replacement suction bar including springs, for the Bona PowerScrubber. Note: Sold per piece, two are needed for a full replacement.

AS3647773230

400 mm

1

Bona Deep Clean Solution



Concentrated cleaner for thorough, deep cleaning of finished and oiled wooden floors as well as outdoor deckings. The unique formula delivers optimal cleaning efficiency and removes stubborn scuff marks without risk of staining the wood.

Key Benefits:

- Revitalizes dull, dirty floors
- Dissolves deeply ingrained dirt and stubborn scuff marks
- Optimized for Bona PowerScrubber

Technical Data:

Dilute with clean water
• Finished surfaces: 1:10
• Oiled surfaces: 1:20
• Outdoor deckings: 1:5

WM650020010

5 L

3

44



FLOOR CARE

Lacquer – Maintenance

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Polish Matt



Bona Polish Matt is a waterborne maintenance coating for finished parquet. Reinforced with polyurethane, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments. Offers continued protection against wear without increasing gloss.

Key Benefits:

- Even, matt surface
- Requires no buffing
- High wear resistance

Technical Data:

Base: Acrylate/Polyurethane
Drying time (until use): < 1 h
Application: Bona Microfibre Applicator Pad
Coverage: 50 m²/L

Matt	WP500313001	1 L	10	50
Matt	WP500320001	5 L	3	44

Bona Polish Gloss



Bona Polish Gloss is a waterborne maintenance coating that is compatible with a wide range of surfaces including finished parquet, laminate, linoleum and PVC. Reinforced with polyurethane, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments. Gives the surface new lustre and continued protection against wear.

Key Benefits:

- Good adhesion to many surfaces
- Requires no buffing
- Scuff resistant
- Slip resistance compliant to DIN 18032:2

Technical Data:

Base: Acrylate/Polyurethane
Drying time (until use): < 1 h
Application: Bona Microfibre Applicator Pad
Coverage: 50 m²/L

Gloss	WP511013001	1 L	10	50
Gloss	WP511020001	5 L	3	44



FLOOR CARE

Lacquer — Maintenance

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Freshen Up



Bona Freshen Up is a waterborne maintenance coating for the frequent maintenance of finished wooden floors. Based on a pure polyurethane dispersion, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments. Bona Freshen Up is high gloss and gives dull floors new shine and luster. Meets both EN 14904:2006 and DIN 18032:2 on slip resistance.

Key Benefits:

- Wax-free maintainer
- Allows for future overcoating with waterborne finish
- High wear resistance

Technical Data:

Base: Acrylate/Polyurethane
Drying time (until use): < 1 h
Application: Bona Microfibre Applicator Pad
Coverage: 50 m²/L

WP595013016	1 L	10	50
WP595020002	5 L	3	44

Bona Cleaner



Concentrated detergent for simple and safe cleaning of finished wood and cork floors. Low foaming and equally suitable for machine cleaning and manual cleaning. Leaves no dulling or slippery residue.

Key Benefits:

- Effective yet safe on wood
- Low foaming
- Fresh smell

Dilution:

- Normal use: 1:100
- Heavily soiled floors: 1:50

WM760013001	1 L	10	50
WM760020001	5 L	3	44



FLOOR CARE

Oils — Maintenance

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Care Oil W



Rapid drying maintenance oil for protecting and reviving oiled wooden floors. Consists of a low-viscous blend of different vegetable oils with excellent penetration ability. Replenishes the wood pores for sustained protection.

Key Benefits:

- Restores and protects
- Great coverage rate
- Quick drying
- Low viscosity, easy to spread

Technical Data:

Base: Modified vegetable oils
Category: Hardening oil, 1-comp
Drying time (until use): 12 h
Application: Bona Wool pad or cotton cloth
Coverage: 50–100 m²/L

Pure	GT525113001	1 L	12	60
Pure	GT525120001	5 L	2	50
White	GT525213001	1 L	6	
Grey	GT525313001	1 L	6	

Bona Wax Oil W



Durable wax oil for periodic maintenance of oiled and hardwax oiled surfaces. Restores dry oiled floors and adds a protective layer of wax for increased resistance to water and spills.

Key Benefits:

- Quick drying
- Low in solvents and odour
- Highly water repellent

Technical Data:

Base: Modified vegetable oils and waxes
Category: Hardening oil, 1-comp
Drying time (until use): 12 h
Application: Bona Woolpad or stainless steel trowel
Coverage: 50–80 m²/L

WP615013100	1 L	12	60
-------------	-----	----	----

Bona Oil Soap



Detergent based on vegetable oil for frequent cleaning and maintenance of oiled wooden floors. Bona soap nourishes the surface and leaves a thin film that can be buffed for increased shine.

Key Benefits:

- Gentle on oiled surfaces
- Cleans and conditions
- Long lasting concentrate

Technical Data:

pH-value: Approx. 9
Dilution: 1:50

WM704013100	1 L	6	45
WM704020100	5 L	3	44



TOOLS & ACCESSORIES



Perfect floors can only be achieved with the right tools. Through decades of working closely with craftsmen, Bona knows exactly what is required when it comes to working with floors. That's why our tools and accessories are expertly developed for seamless compatibility with all our flooring products. From rollers and gun applicators to dust bags and floor care tools, you will find all the equipment you need for every floor task in this section.



1. Coatings
2. Fastening
3. Measurement
4. Occupational Safety
5. Floor Care





TOOLS & ACCESSORIES

Coatings	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Microfibre Roller 11 mm	Microfibre roller for an even application of lacquer producing a low degree of foam. 11 mm pile.				
	25 cm	AT31002200	1	10	
Bona Microfibre Roller 11 mm	Microfibre roller for an even application of lacquer producing a low degree of foam. 11 mm pile.				
	41,5 cm	AT31002600	1	5	
Bona Microfibre Roller 5 mm	Short pile microfibre roller especially suitable for hardwax oil and waterborne paint. 5 mm pile.				
	25 cm	AT31120897	1	10	
Bona Polyester Roller 11 mm	Polyester roller for maintaining an even and high application rate of lacquer. 11 mm pile.				
	25 cm	AT31002300	1	10	
Bona Microfleece Roller 11 mm	Roller with dense microfibre pile for a perfectly smooth application of waterborne finishes. Includes side-guards which help maintain a consistent application rate. 11 mm pile.				
	25 cm	AT31001000	1	10	
Velour Roller	Velour roller suited for the application of hardwax oil as well as epoxy.				
	25 cm	AT31005000	1		



TOOLS & ACCESSORIES

Coatings	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Edge Roller	Small sized roller with extra large diameter for application of lacquer or paint along edges. 8 mm microfibre pile.				
	12 cm	AT31002500	1		
Bona Line Roller	Roller for painting line-markings. Large diameter in order to hold more paint.				
	55 mm	AT31006000	2		
Roller Handle – 10 cm	Handle for 10 cm rollers.				
	10 cm	AT31004000	1		
Roller Handle – 25 cm	Corrosive resistant handle for 25 cm rollers.				
	25 cm	AT31014001	1		
Roller Handle 30-50 cm	Adjustable aluminium handle for 30-50 cm wide rollers.				
	30-50 cm	AT31002800	1	5	
Roller Handle– 55 cm	Handle for 55 mm rollers.				
	55 mm	AT31006100	1		



TOOLS & ACCESSORIES

Coatings	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Extension Bar, quick release	Professional extension bars in aluminium with quick-release locking function.				
	110-200 cm	AT31401002	1		
Bona Rollerbox	Keeps the roller moist and safe during storage and transportation.				
	Red/Grey	AT31405000	1		
Floor Brush	High-quality floor brush with tightly packed, fine bristles. Suitable for hard wax oil and decking oil.				
	22 cm	AT31101000	1		
Floor Brush Pro	Durable floor brush with tightly packed fine bristles made specifically for applying waterborne finish, waterborne paint and lye. Supplied in a convenient cover for safe storage and transportation.				
	30 cm	AT953214	1		
Applicator Handle	Swivel head applicator handle for Oil Application Sleeve.				
	45 cm	AT954225	1		
Oil Application Sleeve	Sleeve made of synthetic fibre for application of low viscosity oil. Also suitable for Bona Nordic Tone and Bona Rich Tone.				
	45 cm	AT954224	1		
Pad Roller shaft	Aluminium centre shaft. Required to be able to mount maroon abrasive rollers or microfiber rollers on the Bona PowerScrubber. Sold in single pack. Two pcs are needed to fully equip the Bona PowerScrubber.				
		AS3647622280	1		



TOOLS & ACCESSORIES

Coatings	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Applicator Handle	Swivel-head applicator handle for Applicator Sleeve.				
	46 cm	AT956904	1		
Applicator Sleeve	Foam and synthetic fibre sleeve for applying waterborne finish.				
	46 cm	AT956903	1		
Oil Squeegee	Oil-resistant squeegee for quick and simple application of Bona Oils. Can be attached to extension bar.				
	50 cm	AT31302001	1		
Disposable Booties	Single-use plastic shoe covers.				
		AT33051000	50		
Stainless Steel Trowel	Stainless steel trowel for waterborne finishes, oils and fillers.				
	27 cm	AT959201	1		
Scraper	A floor scraper for those hard-to-reach areas such as corners, and close to the skirting board.				
	4 cm	AT929502	1		
U-blade					
	4 cm	AT929503	1		
Cotton Cloth	Rip-resistant cotton cloths for oiling, cleaning and buffing jobs.				
	50 x 55 cm	AT32086000	10 pcs		



TOOLS & ACCESSORIES

Coatings

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Lamella, Oak

Oak lamellas for repairing parquet floors.



337 x 68 x 4 mm

P901201

44 pcs

Bona Mixing Bottle

Mixing bottle with clear volume markings that simplify the decantation of two-component finishes. Includes markings for Bona Traffic HD, Traffic, Traffic Anti Slip, Natural 2-comp & Bona Wave.



max. 1.9 L

30031

72 pcs

Hot Knife

Butane-driven hot knife for melting wax when repairing damages in wooden floors. Reaches operating temperature directly.



AT32053100

1

Bona Masking Tape

Bona Masking Tape is sturdy enough for straight line application and flexible enough to tape circular shapes. The tape stays fixed to the floor and prevents seepage under the tape during paint application.



25 mm width

AX34200000

50 m

72

Resilient shoe cover

Blue and white resilient shoe covers.



AT33054000

1

100



TOOLS & ACCESSORIES

Coatings

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Wax Repair Kit

Complete set for making quick and easy repairs to damaged wood, cork or laminate surfaces. The set includes 20 durable hardwax sticks and a butane-driven hot knife to melt the wax. The many different colours in the set will suit most wood types as is but it is also possible to combine waxes for a perfect match. The melted wax doesn't slump, making it possible to fill significant damages in the surface. Once set, the wax forms a hard, wear-resistant surface.

Key Benefits:

- Suitable for all types and colours of wood
- Capable of filling large scratches and cavities in the surface
- Fast repairs, repair is done and ready in a few minutes

Contents:

- Butane-driven hot knife
- 20 hard wax sticks
- Scraper
- Wiping cloth
- Needle

AT32053600

1

Wax Repair Stick

01 Transparent

AT32053001

1

02 Pine

AT32053002

1

Dark oak

AT32053003

1

04 Beech

AT32053004

1

05 Pear

AT32053005

1

06 Oak

AT32053006

1

07 Cherry

AT32053007

1

08 Birch

AT32053008

1

09 Light oak

AT32053009

1

10 Ash

AT32053010

1

11 Brown

AT32053011

1

12 Yellow

AT32053012

1

13 Eggshell

AT32053013

1

14 Grey

AT32053014

1

16 Cream

AT32053016

1

17 Red

AT32053017

1

19 Green

AT32053019

1

20 Blue

AT32053020

1

21 White

AT32053021

1

22 Black

AT32053022

1



TOOLS & ACCESSORIES

Fastening	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Notched Blade Handle 	For application of levelling compounds. Height adjustable.				
	560 mm	AT31444000	1		
Notched Blade R2 560 mm 	Application of levelling compounds.				
	3 mm	AT31444001	10		
	5 mm	AT31344402	10		
Plastic Bucket 	30-litre mixing bucket.				
	30 L	AT31408000	1		
Stir Stick 	Stir stick for mixing two-component adhesives or primers.				
	80 mm	AT32051080	1		
Pull Bar 	Pulling iron for installation of parquet. 55 cm long.				
		AT32033000	1		
Tapping Block 	Tapping block made of polyamide for bonded installation. Without handle.				
		AT32038000	1		
Spike Roller 	For venting levelling compounds. 50 cm wide.				
	50 cm	AT32052500	1		



TOOLS & ACCESSORIES

Fastening	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Spike Shoes 	Nail shoes to be able to walk around in freshly applied material such as levelling compounds or epoxy primers.				
		AT32055000	1 pair		
Bona Cleaning Wipes 	Cleaning wipes for hard-to-remove materials. The textured tissue surface enables deep cleaning and easy dirt removal.				
		AT322100		72	
Cork Strips 	Cork strips for filling gaps between e.g. tile and wood flooring.				
	900 x 8 x 10 mm	AX34001000	25		
	900 x 8 x 10 mm	AX34002000	25		
	900 x 8 x 10 mm	AX34003000	25		
	900 x 8 x 10 mm	AX34004000	25		
	900 x 8 x 10 mm	AX34006000	30		
Collomix stirrer DLX 152M M14 	DLX mixing paddle for an optimal preparation of thin-bed mortars like Bona H600.				
		AT32014003		1	
Collomix Basket Stirrer KR 140, M14 	The KR mixing paddle generates high shear forces when stirring for a lump free and homogenous mixture.				
		AT32014003		1	



TOOLS & ACCESSORIES

Measurement

	Article Number	Packaging	Pcs/transport package	Package/pallet
GANN Hydromette RTU 600 	Quadruple measurement instrument for wood, subfloors, air humidity and temperature, incl. electrode RF-T28.	AT37004000	1	
GANN Hydromette Compact B 	Non-destructive moisture measurement for screeds.	AT37008000	1	



TOOLS & ACCESSORIES

Measurement

Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Surface Hardness Tester 	Surface hardness tester for screeds including guide plate.	AT37010000	1	
V-Head 	For evaluating surface evenness.	AT37012000	1	

Occupational Safety

	Article Number	Packaging	Pcs/transport package	Package/pallet
3M Respirator Mask, 9310 	Dust mask P1 against compact particles.	AT33011100	20	
3M Respirator Mask, 9322 	Dust mask P2 against respirable dust.	AT33012100	10	
3M Respirator Mask, 9332 	Dust mask P3 against respirable dust, with exhalation valve. Can be cleaned, therefore reusable.	AT33013100	10	



TOOLS & ACCESSORIES

Occupational Safety

Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Antivibrate Sanding Glove				
Anti-vibration sanding gloves. Certified to reduce the risk of carpal tunnel syndrome.				
L	AT331000L	1 pcs		
XL	AT331000xL	1 pcs		

Floor Care

Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Polish Applicator				
Polish applicator including a fine cotton sleeve. Suitable for Bona Freshen Up and Bona Polish.				
40 cm	AT31409000		1	
Extra Cotton Sleeve				
Waxing tool for applying Bona Freshen Up and Bona Polish.				
40 cm	AT31409001		1	
Commercial System Kit				
Lightweight yet sturdy telescopic pole made of brushed Aluminium for superior durability. The 60 cm wide mop base is specially designed with a raised edge that helps trap dirt and increases scrubbing pressure. Delivered with 1 Dusting Pad and 1 Cleaning Pad.				
60 cm	WM710013489	1	10	
Dusting Pad				
Pad, designed to be used dry. Consisting of a special mix of short and long fibres with an electrostatic charge to trap and remove loose dust, dirt and debris, quickly and safely from floors.				
60 cm	AX0003543	1	12	
Cleaning Pad				
Pad, designed to be used wet. Consisting of highly absorbent microfibre with a lot of scrubbing action for removing bonded dirt.				
60 cm	AX0003544	1	12	

WANT TO BECOME BETTER?

BONA EDUCATION AND TRAINING

Be part of a successful team by becoming a Bona Certified Craftsman. As a Bona Certified Craftsman you benefit from the advantages of our strong brand profile and wooden floor expertise.

Becoming a Bona Certified Craftsman assures your customers the highest quality performance and service – giving you better profitability and enabling you to focus on your job – delivering great results.





1. Lacquer System
2. Natural Wood Look
3. SuperSport System
4. Craft Oil 2K System
5. Oil System
6. Hard Wax Oil



APPLICATION ADVICE

Lacquer System

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive
2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 min
(20 °C, 60%)
3.

Sanding – Fine with Belt and Edge Sander
4.

Sanding – Final with Bona FlexiSand
5.

1st application – Choose one of the below Bona base coats and apply with Bona Microfibre Roller

Bona White

White washed look
1-3x with roller

Bona Natural

Look of pure wood
1-2x with roller

Bona Classic

The all-rounder
1-3x with roller

Bona Intense

Medium colouration
1x with roller

Bona Amber

Rich colourization
2x with roller

Bona Quick

Quick drying gel
3x with trowel
6.

2nd application – Choose one of the below Bona topcoats and apply with Bona Microfibre Roller

Domestic wear

Bona Nova
Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

Heavy wear

Bona Mega

Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

or

Bona Mega ONE

Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

Very heavy wear

Bona Traffic HD

Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

or

Bona Traffic

Consumption:
8–10 m²/lt
Drying time: 3–4 h
(20 °C, 60%)

7.

Intermediate sanding with Bona FlexiSand or Bona Buffer

8.

3rd application – with the same Bona topcoat as used before

9.

If extreme traffic is expected, an additional application of top coat is recommended

Natural Wood Look

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive

2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 min
(20 °C, 60%)

3.

Sanding – Fine with Belt and Edge Sander

4.

Sanding – Final with Bona FlexiSand

5.

1st application – Bona Natural with Bona Microfibre Roller

Domestic wear

Bona Natural
Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

Very heavy wear

Bona Natural
Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

6.

2nd application – Bona Mega Natural with Bona Microfibre Roller

Mega Natural

Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

Traffic Natural

Consumption:
8–10 m²/lt
Drying time: 3 h
(20 °C, 60%)

Mix Natural 2-comp. with
hardener – shake for 2 mins

7.

Intermediate sanding with Bona FlexiSand or Bona Buffer

8.

3rd application – Bona Mega Natural

3rd application – Traffic Natural

94 | Bona Catalogue 2021

Bona Catalogue 2021 | 95

SuperSport System

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive
2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 mins
(20 °C, 60%)
3.

Sanding – Fine with Belt and Edge Sander
4.

Sanding – Final with Bona FlexiSand or Bona Buffer
5.

1st Application – Bona SuperSport Primer with the Bona Microfibre Roller

SuperSport Primer
Consumption: 8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)
6.

2nd Application – Bona SuperSport HD with the Bona Microfibre Roller

SuperSport HD
Consumption: 8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

Mix SuperSport HD with
SuperSport Hardener –
shake for 1 min
7.

Intermediate sanding with Bona FlexiSand or Bona Buffer
8.

Application – Line marker with Bona SuperSport Line Paint

SuperSport Line Paint
1 liter for approx. 80 m x 5 cm lines
1 liter for approx. 100 m x 4 cm lines
9.

Intermediate sanding with Bona FlexiSand or Bona Buffer and Bona Scrad System
10.

3rd and 4th application of Bona SuperSport HD using a Bona Microfibre Roller

Craft Oil 2K System

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive
2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 mins
(20 °C, 60%)
3.

Sanding – Fine with Belt and Edge Sander
4.

Sanding – Final with Bona FlexiSand or Bona Buffer
5.

Application – Bona Craft Oil 2K

Consumption: approx. 30 m²
6.

Remove surplus with cotton cloths
7.

Application – Bona Traffic HD, Bona Traffic or Traffic Natural after min 8 h (12 h for pigmented oil)

Consumption: 8–10 m²/lt
Drying time: 3–4 h
(20 °C, 60%)
8.

Intermediate sanding with Scrad Pad
9.

2nd application – Using the same product as in the previous layer

Bona Traffic HD
Consumption: 8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

or

Bona Traffic
Consumption: 8–10 m²/lt
Drying time: 3–4 h
(20 °C, 60%)

Traffic Natural
Consumption: 8–10 m²/lt
Drying time: 3 h
(20 °C, 60%)
10.

If extreme traffic is expected, an additional application of topcoat is recommended

Oil System

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive
2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt

Drying time: 15–30 min

(20 °C, 60%)
3.

Sanding – Fine with Belt and Edge Sander
4.

Sanding – Final with Bona FlexiSand or Bona Buffer
5.

Application of Bona Oil System – Choose one of the 3 treatments

Pure Oil treatment Apply Bona Craft Oil with rubber blade, steel trowel or Bona Wool Pad until wood is saturated	Oil treatment with Bona Nordic Tone Apply Bona Nordic Tone with an application sleeve. Leave to dry for 4–5 hours Bona Nordic Tone Consumption: 8–10 m²/L Drying time: 2–3 h (20 °C, 60%)	Oil treatment with Bona Rich Tone Apply Bona Rich Tone with an application sleeve. Leave to dry for 4–5 hours Bona Rich Tone Consumption: 8–10 m²/L Drying time: 2–3 h (20 °C, 60%)
Massage oil into wood using green pad for neutral oil, or red pad for coloured oil, attached to Bona FlexiSand	Fine sanding using Bona FlexiSand and Bona Scrad Pad. Remove dust with a vacuum cleaner	Fine sanding using Bona FlexiSand and Bona Scrad Pad. Remove dust with a vacuum cleaner
Remove surplus oil with cotton cloth and allow to dry	Apply Bona Craft Oil with rubber blade, steel trowel or Bona Wool Pad until wood is saturated	Apply Bona Craft Oil with rubber blade, steel trowel or Bona Wool Pad until wood is saturated
For best results dry buff surface with Bona Wool Pad.	Massage oil into wood with red pad attached to Bona FlexiSand	Massage oil into wood with red pad attached to Bona FlexiSand
	Remove surplus oil with cotton cloth and allow to dry	Remove surplus oil with cotton cloth and allow to dry
	For best results dry buff surface with Bona Wool Pad.	For best results dry buff surface with Bona Wool Pad.
		Apply a thin coat of Bona Hard Wax Oil. Allow 8–10 hours for drying

Hard Wax Oil

1.

Sanding – Coarse and medium with Belt and Edge Sander or the Bona PowerDrive
2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt

Drying time: 15–30 min

(20 °C, 60%)
3.

Sanding – Fine with Belt and Edge Sander
4.

Sanding – Final with Bona FlexiSand or Bona Buffer

5.	Matt/Silk Matt 1st application with Bona Hard Wax Oil. Apply a thin layer with a Microfiber Roller Application tool: Bona Microfiber Roller 5 mm Bona Hard Wax Oil Consumption: Depending on type of wood – approx. 1 L for 20–24 m². Drying time: 6–8 h
5.1	
5.2	Abrade with Bona Scrad Pad
5.3	2nd application: Very thin layer with a Microfiber Roller

Adhesive Guidelines

Flooring	EN/DIN Standard	Type	Consumption g/m²	R848	R848T	Quantum/T	Titan	D705	D720
Parquet strip and mosaic parquet finger 1-layer (solid) unfinished elements	EN 13226	parquet strip of oak and similar wood types	1000/1250	—	✓	✓	✓	✓	✓
	EN 13226	parquet strip of beech and similar highly-absorbent wood types	1000/1250	—	✓	✓	✓	✓	✓
	EN 13488	mosaic parquet finger	850	✓	✓	✓	✓	✓	✓
	EN 13228	blocks/overlay, oak or similar wood width/thickness < 5/1	1000/1250	—	✓	✓	✓	✓	✓
	EN 13228	blocks/overlay, beech and similar highly-absorbent wood types < 5/1	1000/1250	—	—	✓	✓	✓	✓
	EN 14761	wood flooring - solid wood parquet – vertical finger, wide finger and module brick – 10/16/22 mm	1000/1250	✓*	✓*	✓*	✓	✓	✓
	EN 13227	wood flooring – solid lam parquet products up to 25 x 5 cm, oak and similar wood types	1000	—	—	✓	✓	✓	✓
	EN 13227	wood flooring – solid lam parquet products up to 25 x 5 cm, beech and similar highly-absorbent wood types	1000	—	—	✓	✓	✓	✓
	EN 13629	solid hardwood flooring and solid hardwood flooring composite elements	1000	—	—	✓	✓	—	—
1-layer parquet element, factory prefinished	EN 13629	wood flooring – solid lam parquet products larger than 25 x 5 cm	1250/1500	—	—	—	✓	—	—
	EN 13488	small formats, oak and similar wood types	850	✓	✓	✓	✓	✓	✓
	EN 13488	small formats, beech and similar highly-absorbent wood types	850	—	—	✓	✓	✓	✓
Multilayered parquet element, factory prefinished	EN 13226	parquet strip with groove and tongue	1000/1250	—	✓	✓	✓	✓	✓
	EN 13489	2-layer, parquet strip	1000	✓	✓	✓	✓	✓	✓
	EN 13489	2-layer, parquet panel	1000/1250	✓	✓	✓	✓	—	—
	EN 13489	3-layer flooring board: < 13 mm thick	1250	✓	✓	✓	✓	✓	✓
	EN 13489	3-layer flooring board: 10–13 mm thick, less than 1200 mm	1250	✓	✓	✓	✓	✓	✓
Multilayered parquet element, unfinished	EN 13489	3-layer flooring board: 10–13 mm thick, longer than 1200 mm	1250	✓	✓	✓	✓	—	—
	EN 13489	2-layer	1000	✓	✓	✓	✓	✓	✓
	DIN 68702	Wood block RE & WE up to 40 mm thickness	1000/1500	—	—	—	✓	✓	✓
	DIN 68702	Wood block GE > 40 mm thickness (industrial)	1250/1500	—	—	—	—	—	—

* R848/R848T/Quantum/Quantum T only for 16 and 22 mm

Subfloor Construction	Binding Material according to EN 13813	Type of subfloor						
Floating screed including calcium sulphate screed also with underfloor heating system and self-levelling compounds	CT	Cementitious (heated) screed	✓	✓	✓	✓	✓	✓
	CA	Calcium sulphate (heated) screed	✓	✓	✓	✓	—	—
	CA	Calcium sulphate floating screed	✓	✓	✓	✓	—	—
	AS	Mastic asphalt, well-sanded**	✓	✓	✓	✓	—	—
	CT/CA	Self-levelling compounds	✓	✓	✓	✓	✓	✓
Wooden substrate		Chipboard, OSB, plywood	—	✓	✓	✓	✓	✓

General: Whether you use a fine or coarse trowel depends on the condition of the subfloor and the dimensions of the parquet elements
****** When using Bona’s silane-based adhesives, a protection primer such as R540 or Bona R410 is necessary prior to the installation of the parquet
Bona R848: can be used under suitable conditions for the installation of solid parquet, such as mosaic and block parquet with proper dimensions. Please contact your local Bona technical team for more information.

Index of Bona Adhesives

Overview of the technical properties of our reactive primers and adhesives

Product name	Base	Consumption of primer in g/m²	Consumption as moisture barrier on CT or concrete floors in g/m²	Barrier effect up to max. residual moisture content	Drying time in general/ Drying time in combination with our reactive adhesives
R410*	2-comp. epoxy resin	Approx. 150–250	Approx. 500 (two applications)	Yes, up to max. 5.0 cm/%	224 h with Bona silane based adhesives
R540	1-comp. polyurethane	Approx. 150–250	Approx. 300 (two applications)	Yes, up to max. 4.0 cm/%	1 h with all Bona silane based adhesives
R590*	Silane based	500	500 (with one application)	Yes, up to max. 5.0 cm/% or 90% relative air humidity	4-6 h with all Bona silane based adhesives

* The broadcasting of quartsand (grit size 0.3–0.8) is possible prior to the usage of a Bona levelling compound.

Special note:

- Bona R410 can be diluted with 20% of Bona S100 ML in order to achieve a deeper penetration of the primer.
- Normally, concrete floors need to be shot-blasted as a mechanical pre-treatment.
- For any further processing information, please view our technical data sheets at www.bona.com

Please note: Our suggestions and recommendations are carefully provided based on our general terms and conditions. Installation and working parameters are followed to the best of our knowledge, give no entitlement of completeness and do not disabuse for the final checkup of the proposals and products on its applicability at the designated range of use (i.e. by making sample areas according to DIN 18356.) The observance of notes of the packaging, labels, technical data sheets, operating, handling and processing instructions as well as marks and appropriate technical guidelines and norms and the accomplishment of the job through a commercial contractor is presupposed according to the adequate instructions.

Index - Products

Product	Page	Product	Page
3M Respirator Mask, 9310	89	Bona Mega	60
3M Respirator Mask, 9322	89	Bona Mega Natural	60
3M Respirator Mask, 9332	89	Bona Mega ONE	59
Accessories	17	Bona Microfibre Roller	80
Adapter Kit 1	22	Bona Microfleece Roller	80
Adapter Kit 2	22	Bona Mini Buffer	37
Applicator Handle	82	Bona Mix Colour	67
Applicator Handle	83	Bona Mix&Fill	68
Applicator Sleeve	83	Bona Mix&Fill Plus	68
Bona 8100	47	Bona Mixing Bottle	84
Bona 8300	43	Bona MultiDisc	32
Bona 8500	46	Bona Natural	56
Bona 8700	40	Bona Net Alox	53
Bona Amber	57	Bona Net Ceramic	53
Bona Belt	25	Bona Nordic Tone	67
Bona Belt HD	24	Bona Notched Trowel	18
Bona Belt Lite	25	Bona Notched Trowel Box	18
Bona Belt UX	23	Bona Novia	61
Bona Blocker	61	Bona Oil Soap	77
Bona Buffer	37	Bona OptiSpread	17
Bona Capricorn	23	Bona Pad 407 mm	49
Bona Care Oil W	77	Bona Pad Drive	32
Bona CEE Adapter	24	Bona Polish Gloss	75
Bona Classic	56	Bona Polish Matt	75
Bona Cleaner	76	Bona Polyester Roller	80
Bona Cleaning Pad	52	Bona PowerDrive	31
Bona Cleaning Wipes	87	Bona PowerDrive Connect	33
Bona CombiEdge	29	Bona PowerRemove R	71
Bona CombiEdge Stair Support	30	Bona PowerScrubber 2.0	74
Bona Concrete Disc	35	Bona PU Filler	68
Bona Craft Oil	65	Bona Pure	69
Bona Craft Oil 2K	65	Bona Pure Colour	70
Bona D500	8	Bona Quantum	14
Bona D501	8	Bona Quantum T	14
Bona D510	8	Bona Quattro Disc	32
Bona D705	12	Bona Quick	57
Bona D720	12	Bona R Creative Chips	70
Bona D750	12	Bona R200	13
Bona DCS 25	23	Bona R405	6
Bona DCS 70	22	Bona R410	7
Bona Decking Oil	66	Bona R440	6
Bona Deep Clean Solution	74	Bona R540	7
Bona Diamond Abrasive Disc	52	Bona R580 Trowel	20
Bona Diamond Blades	34	Bona R590	7
Bona DualEdge	29	Bona R777	13
Bona Domo	60	Bona R778	13
Bona Edge UX	29	Bona R848	15
Bona ErgoEdge	33	Bona R848T	15
Bona Expansion Strips	10	Bona R880	15
Bona Extension Bar, quick release	82	Bona Remove R	71
Bona Fibres	10	Bona RenoForce	6
Bona Fiber Pad	50	Bona Retarder	61
Bona Fiber Pad, velcro backing	50	Bona Rich Tone	67
Bona FlexiSand	31	Bona Rollerbox	82
Bona FlexiVacuum	34	Bona S100	8
Bona Freshen Up	76	Bona S20	39
Bona Gap Master	19	Bona Sanding Disc	33
Bona Green Ceramic	41	Bona Sanding Screen, double-sided	51
Bona H600	9	Bona Scorpion	26
Bona H605	9	Bona Scorpion DCS	26
Bona H610	9	Bona Scrad Pad	50
Bona H660	10	Bona Scrad Wing	51
Bona Hard Wax Oil	70	Bona SuperSport Cleaner	63
Bona Intense	59	Bona SuperSport Cleaner Plus	63
Bona Intermediate Pad	54	Bona SuperSport Line Paint	63
Bona Line Roller	87	Bona SuperSport Primer	62
Bona LinoPrime	75	Bona SuperSport HD	62
Bona Master Trowel	18	Bona SuperSport ONE	62
Bona Masking Tape	84	Bona SuperSport Pure HD	69

Index - Products

Product	Page	Product	Page
Bona Superpad	49	Roller Brush	74
Bona Supraflex	36	Roller Handle – 10 cm	81
Bona Steel Plates set	33	Roller Handle – 25 cm	81
Bona Titan	14	Roller Handle 30-50 cm	81
Bona Traffic	58	Roller Handle– 55 cm	81
Bona Traffic HD	59	Sanding Disc	38
Bona Traffic HD Anti Slip	58	Scraper	83
Bona Traffic Natural	58	Spike Roller	86
Bona Trowel Plus	18	Spike Shoes	87
Bona Trowel 500F	17	Split Segment	35
Bona U300	11	Stainless Steel Trowel	83
Bona U310	11	Stir Stick	86
Bona U340	11	Suction bar	74
Bona Wax Oil W	77	Surface Hardness Tester	89
Bona Wax Repair Kit	85	Tapping Block	86
Bona White	56	Transport Cart	25
Bona Wool Pad	50	Transport Cart	24
Cartridge Applicator	17	Tynex Distressing Drum	27
Cleaning Pad	90	Tower/Spacer for Flexisand Sanding Disc	31
Commercial System Kit	90	Resilient shoe cover	84
Cork Strips	87	U-blade	83
Cotton Cloth	83	Vacuum Sealing Ring	38
Cup Brush Metal M14	36	Wave Bonders	6
Cup Brush Nylon M14	36	Wax Repair Stick	85
Delta Abrasive Paper	52	Velour Roller	74
Diamond Segment	35	V-Head	89
Disposable Booties	83		
Drive Disc	38		
Drive Disc	37		
Dust Bag – Cloth	38		
Dust Bag – Paper	38		
Dust Bags LongoPac	22		
Dusting Pad	90		
Edge Roller	81		
External Soft Start	24		
Extra Cotton Sleeve	90		
Extra Weight - Belt	25		
Extra Weight - Buffer	38		
Extra Weights - Flexisand	37		
Fein MultiMaster saw blades	41		
Fleece Dust Bag	23		
FlexiVacuum Filter Dust Bag	34		
Floor Brush	82		
Floor Brush Pro	82		
GANN Hydromette RTU 600	88		
GANN Hydromette Compact B	88		
Hot Knife	84		
Internal Spur Gear	34		
Lamella, Oak	84		
LED lamp	32		
Metal Distressing Drum	27		
Microfibre Dust Bag Large	26		
Microfibre Dust Bag Small	30		
Microfibre Pad	50		
Metal Brush	33		
Sanding Disc	33		
Tynex Brush	33		
Notched Blade Handle	86		
Oil Application Sleeve	82		
Oil Squeegee	83		
Pad Roller Shaft	82		
PCD Maxi Segment	35		
Plastic Bucket	86		
Polish Applicator	90		
Power Stripper	39		
Pull Bar	86		
Quartz Sand	19		
Quattro Disc	38		
Replacement Pad Set	32		

Index - Article Numbers

Article No.	Page	Article No.	Page	Article No.	Page	Article No.	Page
30031	84	AAS466601506	48	AAS467601003	43	AAS468400606	47
AA970740	50	AAS466800163	48	AAS467601203	43	AAS468400806	47
AA32153016	50	AAS466800243	48	AAS467700243	43	AAS468401006	47
AA32153150	50	AAS466800363	48	AAS467700363	43	AAS468401206	47
AA32153180	50	AAS466800403	48	AAS467700403	43	AAS468601206	51
AA68001000	49	AAS466800603	48	AAS467700603	43	AAS468601506	51
AA68002000	49	AAS466800803	48	AAS467700803	43	AAS468602206	51
AA68003000	49	AAS466801003	48	AAS467701003	43	AAS469500363	40
AA68004000	49	AAS466801203	48	AAS467701203	43	AAS469500503	40
AA68041000	49	AAS466900165	47	AAS467701503	43	AAS469600363	40
AA68042000	49	AAS466900245	47	AAS467800243	43	AAS469600503	40
AA68043000	49	AAS466900365	47	AAS467800363	43	AAS470600245	45
AA68053000	50	AAS466900406	47	AAS467800403	43	AAS470600365	45
AA68054000	50	AAS466900506	47	AAS467800603	43	AAS470600406	45
AA68071000	50	AAS466900606	47	AAS467800803	43	AAS470600606	45
AAS67012060	51	AAS466900806	47	AAS467801003	43	AAS470600806	45
AAS67012080	51	AAS466901006	47	AAS467801203	43	AAS470601006	45
AAS67012100	51	AAS466901206	47	AAS467900163	46	AAS470601206	45
AAS67012120	51	AAS466901506	47	AAS467900243	46	AAS470700361	40
AAS68011000	49	AAS467100165	47	AAS467900363	46	AAS470700501	40
AAS68012000	49	AAS467100245	47	AAS467900403	46	AAS470800361	40
AAS68013000	49	AAS467100365	47	AAS467900503	46	AAS470800501	40
AAS68014000	49	AAS467100406	47	AAS467900603	46	AAS470900361	40
AAS466300241	44	AAS467100506	47	AAS467900803	46	AAS470900501	40
AAS466300361	44	AAS467100606	47	AAS467901003	46	AAS471100245	45
AAS466300401	44	AAS467100806	47	AAS467901203	46	AAS471100365	45
AAS466300601	44	AAS467101006	47	AAS468000163	46	AAS471100406	45
AAS466300801	44	AAS467101206	47	AAS468000243	46	AAS471100606	45
AAS466301001	44	AAS467400245	45	AAS468000363	46	AAS471100806	45
AAS466301201	44	AAS467400365	45	AAS468000403	46	AAS471101006	45
AAS466400241	44	AAS467400406	45	AAS468000503	46	AAS471101206	45
AAS466400361	44	AAS467400606	45	AAS468000603	46	AAS471200606	45
AAS466400401	44	AAS467400806	45	AAS468000803	46	AAS471200806	45
AAS466400601	44	AAS467401006	45	AAS468001003	46	AAS471201006	45
AAS466400801	44	AAS467401206	45	AAS468001203	46	AAS471201206	45
AAS466401001	44	AAS467500245	45	AAS468200163	46	AAS471600365	40
AAS466401201	44	AAS467500365	45	AAS468200243	46	AAS471600505	40
AAS466402201	44	AAS467500406	45	AAS468200363	46	AAS471700365	40
AAS466600165	48	AAS467500606	45	AAS468200403	46	AAS471700505	40
AAS466600245	48	AAS467500806	45	AAS468200503	46	AAS471800365	40
AAS466600365	48	AAS467501006	45	AAS468200603	46	AAS471800505	40
AAS466600406	48	AAS467501206	45	AAS468200803	46	AAS471902408	52
AAS466600506	48	AAS467600243	43	AAS468201003	46	AAS472000808	52
AAS466600606	48	AAS467600363	43	AAS468201203	46	AAS472001208	52
AAS466600806	48	AAS467600403	43	AAS468400365	47	AAS472002408	52
AAS466601006	48	AAS467600603	43	AAS468400406	47	AAS472102408	52
AAS466601206	48	AAS467600803	43	AAS468400506	47	AAS472200008	52

Index - Article Numbers

Article No.	Page	Article No.	Page	Article No.	Page	Article No.	Page
AAS472300008	52	AAS860800803	41	AF4411312200	19	ASC025435	38
AAS472400008	52	AAS860801003	41	AF4411312300	19	ASC74765	38
AAS472600365	47	AAS860801203	41	AF4411312500	19	ASC718070	37
AAS472600606	47	AAS867100603	51	AM43021000	39	ASC718906	50
AAS472600806	47	AAS867100803	51	AM400201100	74	ASC742069	38
AAS472601006	47	AAS867101003	51	AMC020000	39	ASC742077	38
AAS472601206	47	AAS867101203	51	AMC718010	37	ASC742080	38
AAS472700365	45	AAS867101503	51	AMC739000B	37	ASC3611478	37
AAS472700606	45	AAS867101803	51	AMF100000	36	ASF100100	36
AAS472700806	45	AAS867102203	51	AMK1702000	24	ASF100200	36
AAS472701006	45	AAS867300018	49	AMK171110	23	ASF100300	36
AAS472701206	45	AAS867300028	49	AMK173100	23	ASK2999940045	27
AAS472800365	40	AAS867300038	49	AMK175000	25	ASK2999940046	27
AAS472800505	40	AAS867300048	49	AMK175010	25	ASK3199940008	31
AAS473200806	53	AAS867300058	49	AMK180000	26	ASK3199940901	34
AAS473201006	53	AAS867300068	49	AMK180011	26	ASK3199940996	33
AAS473201206	53	AAS872000803	51	AMK185010	26	ASK3199941010	33
AAS473300806	53	AAS872001003	51	AMK270000	29	ASK3199941020	33
AAS473301006	53	AAS872001203	51	AMK270010	29	ASK3199941030	33
AAS473301206	53	AAS872100406	52	AMK280010	29	ASK3199942977	33
AAS473400806	53	AAS872100606	52	AMK280100	29	ASK3199942979	31
AAS473401006	53	AAS872100806	52	AMK281010	29	ASK4099941643	34
AAS473401206	53	AAS903700808	51	AMK281100	29	ASK6099940045	27
AAS473500806	53	AAS903701008	51	AMK282010	29	ASK6099940046	27
AAS473501006	53	AAS903701208	51	AMK282100	29	ASK6999940006	24
AAS473501206	53	AAS903701508	51	AMO110000.3	25	ASK66000030150	30
AAS854303208	50	AF3100013	66	AMO110001.3	25	ASK3199940082	34
AAS860300365	41	AF3100025	66	AMO190001	23	ASO312501	32
AAS860300506	41	AF3102010	66	AMO190002	23	ASO312520	32
AAS860300606	41	AF3600013	66	AMO230500	29	ASO312530	32
AAS860300806	41	AF3600025	66	AMO230600	29	ASK3199940997	31
AAS860301006	41	AF3602010	66	AMO310001	31	ASO312570	35
AAS860301206	41	AF390013001	66	AMO310002	31	ASO312581	35
AAS860400365	41	AF390015001	66	AMO310007	31	ASO312582	35
AAS860400506	41	AF390024001	66	AMO530005	22	ASO319000	32
AAS860400606	41	AF4411311000	19	AMO540000	23	ASO319934	32
AAS860400806	41	AF4411311100	19	AS44008009	39	ASO319936	32
AAS860401006	41	AF4411311200	19	AS44008010	39	ASO319940	35
AAS860401206	41	AF4411311300	19	AS44008014	39	ASO539001	22
AAS860700363	41	AF4411311400	19	AS44008015	39	ASO539910	22
AAS860700503	41	AF4411311500	19	AS3647622500	74	ASO539920	22
AAS860700603	41	AF4411311600	19	AS3647622520	74	ASO540001	23
AAS860700803	41	AF4411311700	19	AS3647624580	74	ASO903670	24
AAS860701003	41	AF4411311800	19	AS3647624810	74	ASO903680	24
AAS860701203	41	AF4411311900	19	AS3647625250	74	ASO991011	26
AAS860800363	41	AF4411312000	19	AS3647773230	74	ASO991110	25
AAS860800503	41	AF4411312100	19	ASC25430	38	ASO992011	30

Index - Article Numbers

Article No.	Page	Article No.	Page	Article No.	Page	Article No.	Page
ASO994011	34	AT31413250	18	AT32086000	83	BR848T5845M1BO	15
ASO995022	25	AT31413251	18	AT331000L	90	BR848T6809M1BO	15
AT322100	87	AT31413252	18	AT331000xL	90	BR8485601M1BO	15
AT929502	83	AT31413253	18	AT33011100	89	BR8485845M1BO	15
AT929503	83	AT31413254	18	AT33012100	89	BR8486809M1BO	15
AT929504	83	AT31444000	86	AT33013100	89	BR20005900M1BO	13
AT953214	82	AT31444001	86	AT33051000	83	BR40501400DEBO	6
AT954224	82	AT32014003	87	AT33054000	84	BR41002000GBBO	7
AT954225	82	AT32033000	86	AT37004000	88	BR44006600DEBO	6
AT956903	83	AT32038000	86	AT37008000	88	BR54002200M1BO	7
AT956904	83	AT32040000	17	AT37010000	89	BR59002300M1BO	7
AT959201	83	AT32042000	17	AT37012000	89	BR77802400M1BO	13
AT31001000	80	AT32046051	17	AX0003543	90	BR84802800M1BO	15
AT31002200	80	AT32046052	17	AX0003544	90	BR88000300M1BO	13
AT31002300	80	AT32046053	17	AX0003562	34	BRQUA02800M1BO	14
AT31002500	81	AT32046054	17	AX34001000	87	BRQUA05609M1BO	14
AT31002600	80	AT32046055	17	AX34002000	87	BRQUAT2800M1BO	14
AT31002800	81	AT32046056	17	AX34003000	87	BRQUAT5601M1BO	14
AT31004000	81	AT32046057	17	AX34004000	87	BRQUAT5703M1BO	14
AT31005000	80	AT32046058	17	AX34006000	87	BRQUAT5845M1BO	14
AT31006000	81	AT32046059	17	AX34200000	84	BRQUAT6809M1BO	14
AT31006100	81	AT32046060	17	AX36225002	11	BRTIT02800M1BO	14
AT31014001	81	AT32051080	86	AX36225003	11	BRTIT06809M1BO	14
AT31101000	82	AT32052500	86	AX36225005	11	BS10002000MLBO	8
AT31120897	80	AT32053001	85	AX36310003	11	EB400620001	69
AT31302001	83	AT32053002	85	AX36500000	19	EC800013001	70
AT31304250	18	AT32053003	85	BD7500220SKCZBO	12	EC800020001	70
AT31344402	86	AT32053004	85	BD75002200DEBO	12	EC801113001	63
AT31360350	83	AT32053005	85	BD75002700M1BO	12	EC801113002	63
AT31400170	18	AT32053006	85	BD50002000MLBO	8	EC801313001	63
AT31400280	17	AT32053007	85	BD51002000MLBO	8	EC801413001	63
AT31400380	17	AT32053008	85	BD70504700M1BO	12	EC801413002	63
AT31401002	82	AT32053009	85	BD72002800M1BO	12	EC801513002	63
AT31401180	18	AT32053010	85	BD75002700M1BO	12	EC801613001	63
AT31402180	18	AT32053011	85	BH500031	10	EC801620001	70
AT31402250	18	AT32053012	85	BH500032	10	EC801634002	63
AT31403180	18	AT32053013	85	BH500033	6	EC801713001	63
AT31404180	18	AT32053014	85	BH60042060DE	9	EC801913001	63
AT31405000	82	AT32053016	85	BH60542054M1	9	EC802613001	70
AT31405180	18	AT32053017	85	BH61042003M1	9	EC802620001	70
AT31406180	18	AT32053019	85	BH66042001M1	10	EC803613001	70
AT31408000	86	AT32053020	85	BR77702700M1BO	13	EC803620001	70
AT31409000	90	AT32053021	85	BR77705000M1BO	13	EC804613001	70
AT31409001	90	AT32053022	85	BR848T1645M1BO	15	EC804620001	70
AT31409180	18	AT32053100	84	BR848T2800M1BO	15	EC811713001	70
AT31410180	18	AT32053600	85	BR848T5601M1BO	15	EC811720001	70
AT31413180	18	AT32055000	87	BR848T5703M1BO	15	EC812713001	70

Index - Article Numbers

Article No.	Page	Article No.	Page	Article No.	Page	Article No.	Page
EC812720001	70	WB200013003	56	WT220320001	60		
EC813713001	70	WB200020012	56	WT220620001	60		
EC813720001	70	WB250020001	57	WT230020001	61		
EC814713001	70	WB250613001	56	WT230313001	61		
EC814720001	70	WB250620001	56	WT230320001	61		
EH390002001	69	WB251024001	62	WT230324001	61		
EM702020001	71	WB251613001	56	WT230613001	61		
EM703020001	71	WB251620001	56	WT230620001	61		
ES200013501	70	WB255020001	57	WT230624001	61		
ES200013502	70	WF21001302	68	WT300313012	59		
ES200013503	70	WF21002002	68	WT300320001	59		
ES200620001	69	WF220020001	68	WT300613012	59		
ES201620003	69	WH330045001	58	WT300620001	59		
ES201620005	69	WH341009001	61	WT300913012	59		
ES205045001	69	WM636020001	63	WT300920001	59		
ES500000110	68	WM636020002	63	WX100006001	61		
ES600003250	68	WM650020010	74	WX700020001	67		
GT525113001	77	WM704013100	77	WX900020001	67		
GT525120001	77	WM704020100	77				
GT525213001	77	WM710013489	90				
GT525313001	77	WM760013001	76				
GT551115001	66	WM760020001	76				
GT551124001	66	WM763020001	63				
GT551215001	66	WP500313001	75				
GT551315001	66	WP500320001	75				
GT551515001	66	WP511013001	75				
GT560113001	65	WP511020001	75				
GT560115001	65	WP595013016	76				
GT560120001	65	WP595020002	76				
GT561113001	65	WP615013100	77				
GT561115001	65	WT133013002	60				
GT570014001	65	WT133020002	60				
GT571114001	65	WT133313002	60				
GT572114001	65	WT133320002	60				
GT573114001	65	WT133613001	60				
GT574114001	65	WT133620001	60				
GT575114001	65	WT133920001	60				
GT576114011	65	WT137020001	62				
GT579114011	65	WT138024001	62				
GT580014011	65	WT138624001	62				
GX504007	67	WT137620001	62				
GX504107	67	WT153946001	58				
GX504207	67	WT155346001	58				
GX504307	67	WT155646001	58				
GX504407	67	WT155946001	58				
P901201	84	WT180646001	60				
WB074002002	57	WT190646001	59				